

# FACTORY CALIBRATION PROCEDURE

## CONTENTS:

General	1
Equipment required	2
Factory test limits	3
Factory calibration procedure	7

## INTRODUCTION:

453

This is the guide for calibrating brand-new instruments, it therefore, calls out many procedures and adjustments that are rarely required for subsequent recalibration. *This procedure is company confidential.* In this procedure, all front panel control labels or Tektronix equipment names are in capital letters (VOLTS/DIV, etc.) internal adjustment labels are capitalized only (Gain Adj, etc.).

Tek form number:

0-110

October 1967

For serial numbers  
20,000 and up, only.

Supersedes  
April 1966



## FACTORY TEST LIMITS:

We initially calibrate the instrument to Factory Test Limits. These limits are often more stringent than advertised performance requirements. This helps insure that the instrument will meet advertised requirements after shipment, allows for inaccuracies of test equipment used, and may allow for changes in environmental conditions.

## QUALIFICATION:

Factory test limits are qualified by the conditions specified in the main body of the calibration procedure. The numbers and letters to the left of the limits correspond to the factory calibration procedure steps where the check or adjustment is made. Instruments may not meet factory test limits if calibration or check-out methods and test equipment differ substantially from those in this procedure.

## ABBREVIATIONS:

Abbreviations in this procedure will be found listed in TEKTRONIX STANDARD A-100.

## CHANGE INFORMATION:

This procedure has been prepared by Product Manufacturing Staff Engineering. For information on changes that have been made to this procedure, to make suggestions for changing this procedure, or to order additional copies: please contact PMSE, 47-261. (DC)



## EQUIPMENT REQUIRED:

The following equipment is necessary to complete this procedure:

### a. *TEKTRONIX Instruments*

- \* 1 TYPE 453 OSCILLOSCOPE
- 1 TYPE 106 SQUARE-WAVE GENERATOR
- \* 1 TYPE 184 TIME-MARK GENERATOR
- \* 1 TYPE 191 CONSTANT-AMPLITUDE SIGNAL GENERATOR
- 1 TYPE P6006 10X PROBE
- 1 TYPE P6028 1X PROBE
- 1 TYPE P6019 CURRENT PROBE
- 1 TYPE TU76 LINE VOLTAGE CONTROL UNIT

### b. *Test Fixtures and Accessories*

- \* 1 STANDARD AMPLITUDE CALIBRATOR (SAC) (067-0502-00)
- 1 SINE-WAVE GENERATOR (1Hz to 1MHz) (067-0542-99)
- 1 DC VOLTAGE BRIDGE (DCVB) (067-0543-99)
- 1 Mercury switch pulser (PMPE Dwg. #1261A)
- 1 50 $\Omega$  GR to BNC in line Termination (017-0083-00)
- 2 50 $\Omega$  BNC Terminations (011-0049-00)
- 1 50 $\Omega$  2X Attenuator, GR connectors (017-0081-00)
- 1 50 $\Omega$  5X Attenuator, GR connectors (017-0079-00)
- 1 50 $\Omega$  10X Attenuator, GR connectors (017-0078-00)
- 1 Passive Termination (011-0078-00)
- 1 20pF Input RC Normalizer (067-0538-00)
- 1 GR to BNC Male adapter (017-0064-00)
- 1 BNC T connector (103-0030-00)
- 1 BNC Female to Female Adapter (103-0028-00)
- 2 5ns cables, GR connectors (017-0502-00)
- 2 50 $\Omega$  42" BNC cables (012-0057-00)
- 2 50 $\Omega$  18" BNC cables (012-0076-00)
- 1 Dual Input Coupler (067-0525-00)

### c. *Other Equipment*

- 1 20,000 $\Omega$ /volt DC Multimeter
- 1 Micro Shock hammer (PMPE Dwg. #1283B)

\* This equipment must be traceable to NBS for Instrument Certification.

Substitute test equipment may be used. The Plant Staff Engineer must approve any substitutions. All equipment listed must perform within its manufacturer's specifications, unless otherwise stated.

It is assumed that all equipment is provided with BNC connectors; if equipment used has other than BNC connectors, adapters, not listed, may be needed.

© , 1967 TEKTRONIX, INC., P. O. Box 500  
BEAVERTON, OREGON. All rights reserved.

## FACTORY TEST LIMITS

### QUALIFICATION

Factory test limits are qualified by the conditions specified in the main body of the calibration procedure. The numbers and letters to the left of the limits correspond to the factory calibration procedure steps where the check or adjustment is made. Instruments may not meet factory test limits if calibration or checkout methods and test equipment differ substantially from those in this procedure.

1. PRELIMINARY INSPECTION
2. PRESET CONTROLS
3. RESISTANCE
4. POWER SUPPLIES
  - b. -12 volts:  $\pm 0.02V$ , max
  - c. +1V  $\pm 5mV$ , max  
.1V  $\pm 0.5mV$ , max
  - +12 volts: -0V to +0.2V, max
  - d. +75 volts:  $\pm 0.2V$ , max
  - e. Ripple and regulation: 2mV, max  
HI: 112 VAC to 136 VAC  
M: 104 VAC to 126 VAC  
LO: 90 VAC to 110 VAC
5. HIGH VOLTAGE

-1950V  
 $\pm 2\%$ , max
6. CRT GRID BIAS
7. PRECHECK TRACE FINDER
8. TRACE ALIGNMENT
  - a. TRACE ROTATION: Range:  $6^\circ$ , min
  - b. Y Axis alignment:  $\pm 0.1$  div, max
  - c. Geometry: 0.1 div, max
9. SCALE ILLUM

no illumination ccw  
max illumination cw
10. CRT
11. STEP ATTEN BAL

10 div of total range, min  
at least 2 div from stop  
at proper setting.
12. VERTICAL POSITION CENTERING

$\pm 1$  div of graticule center
13. BALANCE
  - a. VARIABLE balance:  $\pm 1$  div of graticule center
  - c. CH 2 INVERT balance:  $\pm 1$  div of graticule center
14. GAIN
  - b. CH 1 GAIN Range:  $\pm 5\%$ , min
  - c. CH 2 GAIN Range:  $\pm 5\%$ , min
  - d. ADD gain  $\pm 1\%$ , max
15. VERTICAL POSITION POTS
  - b. Requirement: Smooth movement of the trace excluding the extremes of rotation of each pot that will cause 3 graticule divisions of trace movement.

16. VOLTS/DIV
- \* a. VOLTS/DIV accuracy error:  $\pm 2\%$ , max
  - b. VARIABLE range: 2.5:1, min
17. INPUT SELECTOR SWITCHES
18. VERTICAL LINEARITY
- Compression, Expansion: 0.1 div, max
19. ALTERNATE
- Requirement: two traces at all TIME/DIV positions
20. VOLTS/DIV COMPENSATION
- b. CH 1 compensation  
Flat topped waveform:  $\pm 1\%$ , max
  - c. CH 2 compensation  
Flat topped waveform:  $\pm 1\%$ , max
21. HIGH FREQUENCY COMPENSATION
- b. CH 1 20mV HF compensation  
Aberrations:  $\pm 2\%$ , max
  - d. CH 2 HF compensation  
Aberrations:  $\pm 2\%$ , max
  - e. Added mode transient response  
Aberrations:  $\pm 6\%$ , max
  - f. 10mV compensation  
Aberrations:  $\pm 2\%$ , max
  - g. 5mV compensation  
Aberrations:  $\pm 2\%$ , max
22. TRANSIENT RESPONSE
- b. -Polarity transient response  
Aberrations:  $\pm 2\%$ , max
  - c. Positioning effect on transient response:  $\pm 5\%$ , max
23. COMMON MODE REJECTION RATIO
- \* b. CMRR: 20:1, min at 20MHz
24. HF BANDWIDTH
- \* b. 20mV/DIV HF bandwidth 53.5MHz or more at -3dB
  - \* c. 10mV/DIV HF bandwidth 47.5MHz or more at -3dB
  - \* d. 5mV/DIV HF bandwidth 42 MHz or more at -3dB
  - \* f. Added mode HF bandwidth 53.5MHz or more at -3dB
25. CH 1 OUT
- \* b. Bandwidth: 25MHz or more at -3dB
  - c. Deflection factor: 1mV/div, min
26. VERTICAL POSITION RANGE
- b. Position range: 13.5 to 16.5 div
27. ATTENUATOR ISOLATION
- b. Isolation: 10,000:1, min at 20MHz
28. TRIGGER LEVEL CENTERING
29. TRIGGERING
- a. High Freq Triggering  
Jitter: 1ns, max
- |        | <u>10MHz</u> | <u>50MHz</u> |
|--------|--------------|--------------|
| INT AC | .2 div       | 1 div        |
| LF REJ | .2 div       | 1 div        |
| DC     | .2 div       | 1 div        |
24. Attenuator transient response  
Aberrations: 5mV to 20mV  $\pm 2\%$ , max  
50mV to 2V  $\pm 3\%$ , max  
5V to 10V  $\pm 6\%$ , max

29. TRIGGERING (cont'd)

EXT AC	50mV	200mV
LF REJ	50mV	200mV
DC	50mV	200mV

- b. HF REJ .2 div of 50 kHz  
not triggered at 1MHz
- c. Low Freq triggering (30 Hz)
 

	<u>INT</u>	<u>EXT</u>
AC	.2 div	50mV
HF REJ	.2 div	50mV
- d. LF REJ .2 div of 30 kHz  
not triggered at 100 Hz
- e. SINGLE SWEEP same triggering  
level as in NORM
- f. LINE triggered on correct polarity

30. TRIGGERING LEVEL RANGE

- b. EXT LEVEL range: + and - 2V, min
- c. EXT ÷ 10 LEVEL range: + and  
- 20V, min

31. SWEEP RECOVERY

0.2 div of sweep shift, max

32. AUTO RECOVERY TIME

- b. Recovery time: 50 to 100ms

33. SWEEP START, A SWEEP CAL

\* 34. DELAY TIME LINEARITY

Error: ±1.5 minor div, max

35. NORM GAIN

36. B SWEEP CAL

37. X10 MAG

- \* a. Mag Gain. Error: ±1%, max
- \* b. Non-Linearity ±1%, max
- c. Mag Regis. Shift: ±.1 div, max

38. SWEEP LENGTH

- a. B sweep length 11 divisions ±.5  
div, max
- b. A sweep length From 4 divisions or  
less to 11 divisions  
±0.5 div, max

39. VARIABLE RANGE

- a. A VARIABLE range 2.5:1, min
- b. B VARIABLE range 2.5:1, min

40. POSITION RANGE

- a. ↔ Position. Range: Ends of sweep  
to graticule center
- b. ↔ FINE. Range: 5 to 8 div

41. 1μSEC/DIV TIMING

42. HIGH SPEED TIMING

- c. .1 SEC/DIV X10 MAG timing error:  
±3%, max over the entire sweep  
excluding the first and last 3 div

43. A SWEEP TIME/DIV

- \* a. MAG OFF Error: ±2%, max
- \* b. X10 MAG Error: ±3%, max

44. B SWEEP TIME/DIV

- \* a. MAG OFF Error: ±2%, max
- \* b. X10 MAG Error: ±3%, max

\* 45. DELAY TIME ACCURACY

1 $\mu$ SEC to 50mSEC Error:  $\pm 1\%$ , max  
.1 SEC to 5 SEC Error:  $\pm 2\%$ , max

46. DELAY TIME JITTER

0.3 div, max

47. EXT HORIZ

- \* b. Ext Horiz Gain Error:  $\pm 2\%$ , max
- \* c. Deflection Factor  
EXT: 270mV/div  $\pm 15\%$   
EXT  $\div$  10: 2.7V/div  $\pm 20\%$
- \* d. Bandwidth: 5mHz or more at -3dB

48. CHOPPED OPERATION

- b. Chopped frequency 500KHz  $\pm 20\%$ , max

49. CALIBRATOR

- \* b. Cal Freq: 1KHz  $\pm 0.05\%$
- c. Duty Cycle: 50%  $\pm 0.8\%$
- \* d. Risetime: 1 $\mu$ s, max

50. Z AXIS

- b. Sensitivity: 5V, min
- c. Max usable frequency: 50MHz, min

51. B ENDS A

52. TRACE FINDER

Trace must not position off graticule

53. A AND B GATES

- a. A GATE. Amplitude: 12V  $\pm 5\%$ , max
- b. B GATE. Amplitude: 12V  $\pm 5\%$ , max

54. HOLDOFF

- a. HF STAB. Holdoff: 0.2 $\mu$ s, min
- b. A Sweep holdoff
  - .1 $\mu$ SEC to 5 $\mu$ SEC less than 2.5 $\mu$ s
  - 10, 20, and 50 $\mu$ SEC 3.5-10 $\mu$ s
  - .1, .2 and .5mSEC 35-100 $\mu$ s
  - 1, 2 and 5mSEC .35-1ms
  - 10, 20 and 50mSEC 3.5-10ms
  - .1 SEC to 5 SEC 35-100ms

THE END

\* Indicates measurement characteristic; test equipment used must be traceable to the NBS for instrument certification.

1. PRELIMINARY INSPECTION

*a. Make General Inspection*

Check for unsoldered joints, rosin joints, lead dress and long leads. Check for loose hardware and protruding parts. Check controls for smooth mechanical operation, proper indexing and clearance between knobs and front panel.

Correct all defects found.

*b. Check DELAY-TIME MULTIPLIER*

Turn the DELAY-TIME MULTIPLIER ccw to the stop. Check for a dial reading of 0.2. If the dial reading is not 0.2 at the ccw stop, loosen the dial set screw and reposition the dial on the shaft. Tighten the set screw and check that the dial operates smoothly.

*c. Check Fuses*

Remove the line selector cover and check that proper fuses are installed. (see Fig. 1). Check F937; AGC2 (on back panel adjacent to CRT socket). Check F1172; AGC 1/2 and F1204; AGC 1/4 (on either side of T1101).

*d. Check CRT*

Inspect the CRT for phosphor defects, scratches, chips and cracks around neck pins. Check neck pins for proper connection and tightness. Check graticule alignment.

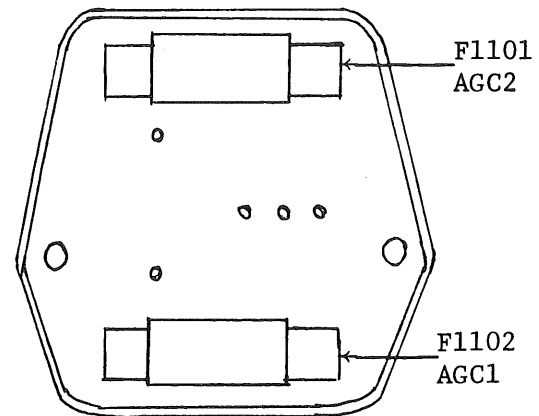


Fig. 1

d. Do not reject a CRT without consulting a trained CRT checker or referring to the Cathode Ray Tube Checkout Procedure.

2. PRESETS

*Preset TYPE 453 external controls*

INTENSITY	ccw
FOCUS	ccw
SCALE ILLUM	midr
CH 1 & CH 2	
VOLTS/DIV	20mV
VARIABLE	CAL
POSITION	midr
INPUT Selector	DC
STEP ATTEN BAL	midr

2. Leave all controls and adjustments for any step as they were in the preceding step unless noted otherwise.

2. (cont'd)

GAIN	midr
MODE	CH 1
INVERT	in
DELAY-TIME MULTIPLIER	ccw
A AND B TIME/DIV	1mSEC
A VARIABLE	CAL
A SWEEP MODE	NORM TRIG
B SWEEP MODE	TRIGGERABLE AFTER DELAY TIME
HORIZ DISPLAY	A
MAG	OFF
A SWEEP LENGTH	FULL
↔ POSITION	midr
A & B TRIGGERING	
LEVEL	cw
SLOPE	+
COUPLING	AC
SOURCE	INT
POWER	ON
ASTIG	midr
TRACE ROTATION	midr
B TIME/DIV	
VARIABLE	CAL
CALIBRATOR	1V
LINE VOLTAGE	
SELECTOR	LO
RANGE	115

Preset all internal adjustments to midr.

3. RESISTANCE

a. *Check power supply resistance*

Measure power supply resistance to ground at the LV Regulator Board as follows:

SUPPLY	TEST POINT	APPROXIMATE RESISTANCE		METER SCALE
		POS LEAD TO GND	NEG LEAD TO GND	
-12V	Pin H	75Ω	80Ω	X10
+12V	Pin D	90Ω	70Ω	X10
+75V	Pin B	1KΩ	1K	X1K
+150V (unreg)	F1204	8KΩ	2.6K	X1K



3. (cont'd)

b. *Check transformer Primary resistance*

Measure resistance across the power plug at each setting of the Line Voltage Selector to check for correct transformer primary wiring.

<u>Selector</u>	<u>Meter Scale</u>	<u>Approx Resistance</u>
115V		
LO	X1	3.5Ω
M	X1	4.0Ω
HI	X1	4.3Ω
230V		
HI	X10	16.0Ω
M	X10	14.5Ω
LO	X10	12.5Ω

4. POWER SUPPLIES

a. *Check Line Voltage Selector*

Connect a 10X Probe from the test scope input to terminal 14 of T1101. Connect the TYPE 453 power cord to the TYPE TU76 outlet and adjust the TYPE TU76 for a 50V P-P signal on the test scope. Check the line voltage selector as in the following table:

<u>Selector</u>	<u>P-P Voltage</u>
230V	
LO	50V(set)
M	44V
HI	40V
115V	
HI	80V
M	88V
LO	100V

Set the Line Voltage Selector to 115V and M and adjust the TYPE TU76 for 115 VAC line. Check that the POWER ON light is on.

b. *Adjust -12 volts, R1122:  
-12V ±0.02V, max*

Connect the DCVB to Pin G of the LV Regulator Board. Adjust R1122 for -12V.

## 4. (cont'd)

- c. *Adjust +12 volts, R1152:*  
     1V,  $\pm 5mV$ , max  
     .1V,  $\pm 0.5mV$ , max  
     +12V, -0V to +0.2V, max

Remove Q1255 from the calibrator board. Connect the DCVB to the 1KC CAL BNC connector. Adjust R1152 for 1V. Set the CALIBRATOR switch to .1V. Check for 0.1V  $\pm 0.5mV$ . Replace Q1255 and connect the DCVB to Pin D of the LV Regulator board. Check for 12.0 to 12.2 volts.

- d. *Adjust +75 volts, R1182:*  
     +75V  $\pm 0.2V$ , max

Connect the DCVB to Pin B of the LV regulator board. Adjust R1182 for 75V.

- e. *Check +150V unregulated voltage:*  
     Voltage: approx 150V  
     Ripple: approx 2.5V @ 120Hz

Check voltage and ripple at Pin Q of the LV regulation board.

- f. *Check ripple and regulation*

Check ripple and regulation while changing the line voltage over the indicated range for each setting of the LINE VOLTAGE SELECTOR.

HI	112 VAC to 136 VAC
M	104 VAC to 126 VAC
LO	90 VAC to 110 VAC

Check ripple with the test scope and regulation with the DCVB as in the following table:

<u>Power Supply</u>	<u>Max Error</u>	<u>Max Ripple</u>
-12V	$\pm 0.02V$	2mV
+12V	-0V to +0.2V	2mV
+75V	$\pm 0.2V$	2mV

Return the line to 115 VAC and the LINE VOLTAGE SELECTOR to M.

5. HIGH VOLTAGE -1950V  $\pm 2\%$ , max

Connect the DCVB to the -1950V TP and adjust R900 for -1950V. Check the regulation from 104 VAC line to 126 VAC line. Remove the DCVB connection.

5. High Voltage, R900 must be adjusted for zero indicated error when using the DCVB to assure conformance with an initial setting error requirement of  $\pm 1\%$ .

6. CRT GRID BIAS

Set the A SWEEP MODE switch to SINGLE SWEEP. Adjust the INTENSITY control for +12 volts at TP1047 (Z axis board). Adjust R940 so a spot is just visible.

7. PRECHECK TRACE FINDER Trace must not position off graticule

Push in TRACE FINDER and turn vertical and horizontal POSITION controls full cw and ccw. Check that the trace remains within the graticule area.

8. TRACE ALIGNMENT


a. Check TRACE ROTATION Range:  $6^\circ$ , min

Set the A SWEEP MODE to AUTO TRIG. Center the trace vertically. Rotate the TRACE ROTATION control from full ccw to full cw and check the range of adjustment. (see Fig. 2).

Check that the trace movement is in the same direction as the TRACE ROTATION control. Adjust the TRACE ROTATION to align the trace with the center horizontal graticule line.

b. Adjust ASTIG and Y axis align, R989  
Y axis alignment error:  $\pm 0.1$  div, max

Connect the TYPE 184 MARKER OUTPUT to TYPE 453 CH 1 INPUT and push the .1ms and 1ms MARKER SELECTOR buttons. Set the CH 1 VOLTS/DIV so markers extend from the bottom to the

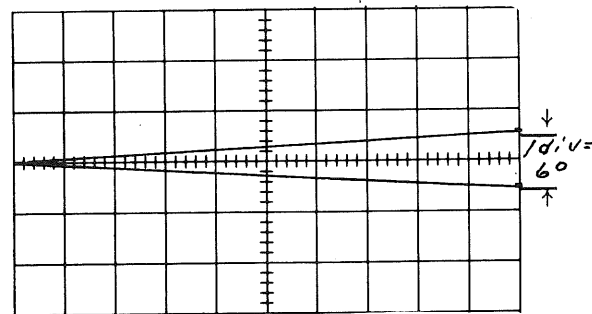

## 8b. (cont'd)

top of the graticule. Adjust the A TRIGGERING LEVEL for a stable display. Adjust the ASTIG and FOCUS for a well defined trace. Adjust Y axis align, R989, to align the center marker with the center vertical graticule line.

c. *Adjust Geometry, R982: Curvature*  
*0.1 div, max*

Adjust the Geometry, R982, for minimum curvature of the markers. Recheck Y axis alignment at the center of the graticule. Re-adjust Y axis align, R989 as necessary. Remove the TYPE 184 markers. Position the trace to the top and bottom graticule lines and note the deviation from a straight line: 0.1 div, max.

9. SCALE ILLUM

No illumination ccw  
 Max illumination cw

Rotate the SCALE ILLUM control through its range. Check for a smooth change in illumination with no illumination at full ccw and maximum illumination at full cw.

10. CRT

Check the CRT for double-peaking, flare, grid emission, cathode interface, charging, burrs and adequate scan area.

10. This is a simplified description of CRT defects. For a more detailed description see the CRT checkout procedure or consult a trained CRT checker.

11. STEP ATTEN BAL

10 div of total range, min  
 At least 2 div from stop at proper setting.

Adjust CH 1 STEP ATTEN BAL for no trace shift as CH 1 VOLTS/DIV is switched between 20mV and 5mV. Set CH 1 VOLTS/DIV to 20mV. Position the trace to the top graticule line. Rotate the STEP ATTEN BAL ccw and check the number

## 11. (cont'd)

of divisions of range. Rotate the STEP ATTEN BAL cw to return the trace to the top graticule line. Use the  $\updownarrow$  POSITION control to place the trace on the bottom graticule line. Rotate the STEP ATTEN BAL cw and again check the number of divisions of range from cw to ccw. Must be 10 div, min. Make the final adjustment for no trace shift as the CH 1 VOLTS/DIV is switched between 20mV and 5mV. Check that there are at least 3 div of adjustment left before the control hits the stop. Change the MODE to CH 2 and repeat step 11 for CH 2 STEP ATTEN BAL.

## 12. VERTICAL POSITION CENTERING      Adjust Position Center: $\pm 1$ div of graticule center

Adjust CH 2  $\updownarrow$  POSITION for 0 Volts at Pin Z of the vertical preamp board. Adjust CH 2 Position Center, R155 to position the trace to graticule center. Loosen the set screw on CH 2  $\updownarrow$  POSITION and position the knob to the center of rotation, then tighten the set screw. Change the MODE to CH 1 and repeat step 12, adjusting CH 1  $\updownarrow$  POSITION for 0V at Pin W and CH 1 Position Center, R55 to center the trace.

## 13. BALANCE

a. Check VARIABLE balance:  $\pm 1$  div of graticule center

Adjust the CH 1  $\updownarrow$  POSITION to a point where the trace returns to the same position at both extremes of the VARIABLE VOLTS/CM control. Trace must be within 1 div of graticule center. Change the MODE to CH 2 and repeat step 13a for CH 2 VOLTS/DIV VARIABLE.

## 13. (cont'd)

- b. Check *INVERT Balance*:  $\pm 1$  div of graticule center

Adjust CH 2  $\downarrow$  POSITION to a point where there is no trace shift as the INVERT button is pulled or pushed. Trace must be within 1 div of graticule center.

---

14. GAIN

- a. *Setup*

Set CH 1 and CH 2 VOLTS/DIV to 20mV, VARIABLE controls to CAL and MODE to CH 1. Set the SAC AMPLITUDE to .1 VOLTS and connect the SAC OUTPUT to CH 1 and CH 2 INPUT using a dual input coupler.

- b. *Adjust CH 1 GAIN* Range:  $\pm 5\%$ , min

Turn the CH 1 GAIN full cw then full ccw and check for a range of at least 4.75 to 5.25 divisions of deflection. Adjust the GAIN for exactly 5 divisions of deflection.

- c. *Adjust CH 2 GAIN* Range:  $\pm 5\%$ , min

Change the MODE to CH 2 and check CH 2 GAIN for a range of at least 4.75 to 5.25 divisions of deflection.

Change the MODE to ADD and pull the INVERT button. Adjust CH 2 GAIN for signal cancellation.

- d. *Check ADD gain* Add error:  $\pm 1\%$ , max

Push the INVERT button. Set the SAC AMPLITUDE to 50mVOLTS. Check for 5 divisions of deflection  $\pm 1\%$ .

---

15. VERTICAL POSITION POTS

- a. *Setup*

Push the INVERT button. Change the MODE switch to ADD. Rotate CH 1  $\downarrow$  POSITION cw and CH 2  $\downarrow$  POSITION ccw.

15. (cont'd)

- b. *Check vertical position pots*  
*Requirement: smooth movement of the trace excluding the extremes of rotation of each pot that will cause 3 graticule divisions of trace movement*

Turn the CH 2  $\downarrow$  POSITION control cw to position the trace to the top graticule line, then turn the CH 1  $\downarrow$  POSITION control ccw to position the trace to the bottom graticule line. Continue moving the trace up with CH 2  $\downarrow$  POSITION then down with CH 1  $\downarrow$  POSITION. Check that the trace may be placed at any position on the graticule excluding that portion of rotation at the ends of each control that results in three graticule divisions of trace movement.

16. VOLTS/DIV

- a. *Check VOLTS/DIV accuracy Error:  $\pm 2\%$ , max*

Set the MODE to CH 1 and set CH 2 input selector to GND. Check CH 1 VOLTS/DIV accuracy as in the following table:

<u>VOLTS/DIV</u>	<u>SAC</u>	<u>DIV DEFLECTION</u>	<u><math>\pm</math>DIV</u>
5mV	20mV	4	.08
10mV	50mV	5	.1
20mV	.1 V	5	.1
50mV	.2 V	4	.08
.1	.5 V	5	.1
.2	1 V	5	.1
.5	2 V	4	.08
1	5 V	5	.1
2	10 V	5	.1
5	20 V	4	.08
10	50 V	5	.1

- b. *Check VARIABLE range: 2.5:1, min*

Set CH 1 VOLTS/DIV to 20mV and SAC AMPLITUDE to .1VOLTS. Turn CH 1 VARIABLE VOLTS/DIV full ccw and check for 2 divisions of deflection, max. UNCAL neon must be off when the VARIABLE is fully cw and on in all other positions.

Return CH 1 VARIABLE to CAL. Change CH 1 input selector to GND and CH 2 input selector to DC. Change the MODE to CH 2. Repeat steps 16a and 16b for CH 2.

17. INPUT SELECTOR SWITCHES

Position the baseline of the display to graticule center. Change the CH 2 input selector to GND and check for a baseline trace with no vertical deflection.

Change the CH 2 input selector to AC and check for a square-wave display approximately centered around the vertical graticule center line.

Change the MODE to CH 1 and repeat step 17 for CH 1 input selector.

18. VERTICAL LINEARITY

Compression and expansion: 0.1 div, max

Change SAC to 50mV and use VARIABLE VOLTS/DIV to obtain exactly 2 div of deflection at graticule center. Position top of display to top graticule line and note compression or expansion: .1 div, max. Position bottom of display to bottom graticule line and again note compression or expansion: .1 div, max. Return VARIABLE to CAL.

Change MODE to CH 2 and repeat compression, expansion check.

Remove SAC signal.

19. ALTERNATE

Two traces at all TIME/DIV positions

Set the MODE to ALT and A TRIGGERING LEVEL full cw and A SWEEP LENGTH for 4 div of sweep. Adjust  $\updownarrow$  POSITION controls for a display of two traces 2 divisions apart.

Check for a display of two horizontal traces on all TIME/DIV positions.

Return A SWEEP LENGTH to FULL.



20. VOLTS/DIV. COMPENSATION

a. *Setup*

TYPE 106 HI AMPLITUDE OUTPUT -- GR to BNC adapter -- 50Ω cable -- 50Ω 10:1 attenuator -- 50Ω termination -- 20pf input RC normalizer -- TYPE 453 CH 1 INPUT. Set the TYPE 453 MODE to CH 1, VOLTS/DIV to 20mV, input selector to DC, TIME/DIV to .2mSEC and adjust the TRIGGERING LEVEL for a stable display. Adjust the TYPE 106 controls for 4 divisions of 1KHz signal.

b. *Adjust CH 1 compensation:*

*Flat topped waveform ±1%, max*

Adjust or check for an optimum square-wave display as in the following table removing the 10:1 attenuator as necessary:

VOLTS/DIV	SERIES (corner)	SHUNT (flat top)
20mV		C17
10mV	check	check
5mV	check	check
50mV	C6C	C6B
.1	C7C	C7B
.2	C8C	C8B
.5	check	C11 for best
1	check	compromise
2	C9C	C9B
5	check	check
10	check	check

b. Use the 20pf Input RC Normalizer when adjusting or checking the shunt capacitors and remove the Input RC Normalizer when adjusting or checking the series capacitors.

c. *Adjust CH 2 compensation:*

*Flat topped waveform ±1%, max*

Change the TYPE 453 MODE to CH 2. Move the TYPE 106 connection to CH 2 INPUT. Adjust or check for an optimum square-wave display as in the following table:

VOLTS/DIV	SERIES (corner)	SHUNT (flat top)
20mV		C117
10mV	check	check
5mV	check	check
50mV	C106C	C106B
.1	C107C	C107B
.2	C108C	C108B
.5	check	C111 for best
1	check	compromise
2	C109C	C109B
5	check	check
10	check	check

21. HIGH FREQUENCY COMPENSATION

a. Setup

TYPE 106 + OUTPUT -- 5ns cable -- 2X  
Attenuator -- 50Ω GR to BNC in line termination -- TYPE 453 CH 1 INPUT.

Set the TYPE 453 MODE to CH 1 and CH 1 and CH 2 VOLTS/DIV to 20mV.

Set the TYPE 106 selector switch to FAST RISE, REPETITION RATE RANGE and multiplier to 100kHz and + TRANSITION AMPLITUDE for 4 divisions of display amplitude.

b. Adjust CH 1 20mV/DIV hf compensation  
Aberrations: ±2%, max

Set TYPE 453 TIME/DIV to .1μSEC. Preset C45A, C54, C49, R49, R328, C328 and C336 for a reasonably good square wave presentation.

b. The Vertical Preamp board has four components to be selected for best high frequency compensation. All of the selected components except R195 are mounted in sockets. Select the components in the order given in the following table:

Selected Component	Range of Values (to provide a 2 to 3% total compensating effect)	Device(s) for which this provides a compensating effect	Conditions for selecting (20 mV/DIV, four-division 100 kHz signal applied)	Selection procedure
1. C38	.001 to .01 μF	Q23, Q33	MODE CH 1 10μs/DIV MAG OFF	Select for best flat top over first 2 to 5 microseconds
2. C264	14 to 47 pF	Delay line	MODE CH 1 2μs/DIV MAG OFF	Select for best flat top over first 0.2 to 0.6 microseconds
3. C138	.001 to .01μF	Q123, Q133	MODE CH 2 10μs/DIV MAG OFF	Select for best flat top over first 2 to 5 microseconds
4. R195	24 k to 300 kΩ	Q84, Q94, Q184, Q194	MODE CH 2 2μs/DIV MAG OFF	Select for best match of Channel 2 to Channel 1 over first 0.5 microseconds

## 21b. (cont'd)

C38 and C138 are selected from among the following capacitors:

.001 $\mu$ F	283-0067-00	200V	$\pm 10\%$
.0015	283-0114-00	200V	$\pm 20\%$
.0022	283-0119-00	200V	$\pm 5\%$
.0027	283-0142-00	200V	$\pm 5\%$
.0033	283-0041-00	500V	$\pm 5\%$
.0047	283-0083-00	500V	$\pm 5\%$
.01	283-0079-00	250V	$\pm 20\%$

C264 is selected from among the following capacitors:

14 pF	281-0577-00	500V	$\pm 5\%$
18 pF	281-0578-00	500V	$\pm 5\%$
22 pF	281-0511-00	500V	$\pm 2.2$ pF
27 pF	281-0512-00	500V	$\pm 2.7$ pF
33 pF	281-0629-00	600V	$\pm 5\%$
39 pF	281-0603-00	500V	$\pm 5\%$
47 pF	281-0519-00	500V	$\pm 4.7$ pF

Set the TIME/DIV to  $.2\mu$ SEC and adjust C263 and C265 for most uniform level at the top of the waveform. Change the MAG to X10.

Adjust C45A, C49A, C54A, R49, R328, C328 and C336 for optimum square wave response and risetime. P-P aberrations including overshoot, undershoot, ringing and level must not exceed 2% of signal amplitude.

## 21. (cont'd)

*c. Check CH 2 delay line compensation*

Change MODE to CH 2 and TYPE 106 signal to CH 2 INPUT. Switch MAG to OFF and TIME/DIV to 1 $\mu$ SEC. Check for optimum level of top of square-wave. Select value of R195 ( $\frac{1}{2}$ w 5%) if necessary for optimum waveform.

*d. Adjust CH 2 20mV/DIV hf compensation aberrations:  $\pm 2\%$ , max*

Change the TYPE 453 TIME/DIV to .2 $\mu$ SEC and MAG to X10. Adjust C145A, C149, C154 and R149 for optimum square-wave response. Compromise CH 1 and CH 2 adjustments as necessary to obtain similar response.

P-P aberrations must not exceed 2%.

*e. Check transient response with MODE in ADD. aberrations:  $\pm 6\%$ , max*

Change the MODE to ADD. Position the display to graticule center with both  $\updownarrow$  POSITION controls near midr. Check P-P aberrations for 6% max.

*f. Adjust 10mV/DIV compensation aberrations:  $\pm 2\%$ , max*

Replace the 2X attenuator with a 5X attenuator. Change the MODE to CH 1 and CH 1 and CH 2 VOLTS/DIV to 10mV.

Adjust C44A, C44C and R44C for optimum square-wave response with not more than 2% P-P aberrations. Move the TYPE 106

## 21f. (cont'd)

signal to CH 2 INPUT and change the MODE to CH 2. Adjust C144A, C144C and R144C for optimum square-wave response with not more than 2% P-P aberrations.

*g. Adjust 5mV compensation  
aberrations:  $\pm 2\%$ , max*

Replace the 5X attenuator with a 10X attenuator. Change the CH 1 and CH 2 VOLTS/DIV to 5mV.

Adjust L143A, C143A, C143C and R143C for optimum square-wave response with not more than 2% P-P aberrations.

Move the TYPE 106 signal to CH 1 INPUT and change the MODE to CH 1. Adjust L43A, C43A, C43C and R43C for optimum square-wave response with not more than 2% P-P aberrations.

22. ATTENUATOR HF RESPONSE

*a. Check -polarity transient response  
 $\pm 2\%$ , max*

Connect SAC and TYPE 106 outputs to mercury switch pulser. Connect pulser output to CH 1 INPUT. Set SAC to .2 VOLTS -DC and TYPE 453 A TRIGGERING SLOPE to -. Adjust TYPE 106 AMPLITUDE and FREQUENCY for best waveform. Adjust pulser amplitude for 4 div pulse positioned to graticule center. Check P-P aberrations for 2%, max.

*b. Check position effect on transient response  $\pm 5\%$ , max*

Adjust pulser amplitude for 6 div deflection. Position bottom of waveform to top graticule line. Note aberrations: 5%, max

Switch SAC to +DC and TRIGGERING SLOPE to +. Position top of waveform to bottom graticule line and note aberrations: 5%, max

## 22. (cont'd)

c. *Check attenuators*

Transient response: 5mV to 20mV  $\pm 2\%$ , max  
 50mV to 2 V  $\pm 3\%$ , max  
 5 V to 10V  $\pm 6\%$ , max

Risetime: 6.6ns, max

Check transient response and risetime on all CH 1 VOLTS/DIV ranges maintaining 4 div signal with switch on SAC and pulser amplitude control.

Change MODE to CH 2 and pulser signal to CH 2 INPUT. Repeat -polarity, positioning effect and attenuator response checks for CH 2.

23. COMMON MODE REJECTION RATIOa. *Setup*

Connect TYPE 191 OUTPUT -- 5ns cable -- 50 $\Omega$  10X attenuator -- 50 $\Omega$  GR to BNC termination -- dual input coupler -- CH 1 INPUT CH 2 INPUT.

Set both VOLTS/DIV switches to 50mV and adjust the TYPE 191 for 3.2 divisions of 50KHz.

b. *Check common mode rejection ratio*  
20:1, min at 20MHz

Change both VOLTS/DIV switches to 20mV, MODE to ADD and pull the INVERT button A. Set the TYPE 191 to 20MHz and check vertical deflection: 0.4 division, max. Push in the INVERT button and remove the dual input coupler.

24. HF BANDWIDTHa. *Setup*

TYPE 191 -- 5ns cable -- 50 $\Omega$  X10 attenuator -- 50 $\Omega$  GR to BNC termination -- TYPE 453 CH 1 INPUT.

24. Bandwidth limits listed are to insure meeting advertised requirements when probes are used.

## 24a. (cont'd)

Set the MODE to CH 1 and CH 1 VOLTS/DIV to 20mV.

- b. *Check 20mV/DIV HF bandwidth 53.5MHz or more at -3dB*

Adjust the TYPE 191 for 4 divisions of 50KHz signal. Increase the frequency until the deflection is reduced to 2.8 divisions. Read the high frequency -3dB point from the TYPE 191 dial.

- c. *Check 10mV/DIV HF bandwidth: 47.5MHz or more at -3dB*

Change the VOLTS/DIV to 10mV. Adjust the TYPE 191 for 4 divisions of 50KHz signal. Increase the frequency until the deflection is reduced to 2.8 divisions. Read the high frequency -3dB point from the TYPE 191 dial.

- d. *Check 5mV/DIV HF bandwidth: 42MHz or more at -3dB*

Change the VOLTS/DIV to 5mV and adjust the TYPE 191 for 4 divisions of 50KHz signal. Increase the frequency until the deflection is reduced to 2.8 divisions. Read the high frequency -3dB point from the TYPE 191 dial.

- e. *Check CH 2 HF bandwidth: -3dB points must be within 5MHz of CH 1*

Change the MODE to CH 2 and move the TYPE 191 signal to CH 2 INPUT. Repeat steps 24b, c and d for CH 2.

- f. *Check ADD MODE HF bandwidth: 53.5MHz or more at -3dB*

Set both VOLTS/DIV switches to 20mV, CH 1 input selector to GND and MODE to ADD. Adjust the TYPE 191 for 4 divisions of 50KHz signal. Increase the frequency until the deflection is reduced to 2.8 divisions. Read the high frequency -3dB point from the TYPE 191 dial.

Change the CH 2 input selector to GND, CH 1 input selector to DC and TYPE 191 signal connection to CH 1 INPUT. Repeat Step 21f for CH 1.

25. CH 1 OUT*a. Setup*

Connect TYPE 191 OUTPUT -- 5ns cable --  
5X attenuator -- 50 $\Omega$  GR to BNC termination  
-- TYPE 453 CH 1 INPUT.

Set both VOLTS/DIV to 5mV, MODE to CH 2  
and both input selectors to DC. Connect  
CH 1 OUT to CH 2 INPUT with an 18" BNC  
cable.

*b. Check bandwidth 25MHz or more at -3dB*

Adjust the TYPE 191 for 4 divisions of 50  
KHz signal. Increase the frequency until  
the deflection is reduced to 2.8 divisions.  
Read the high frequency -3dB point from  
the TYPE 191 dial.

*c. Check deflection factor  
1mV/div, min*

Remove the TYPE 191 signal connection and  
connect the SAC OUTPUT to TYPE 453 CH 1  
INPUT. Set the SAC AMPLITUDE to 5mVOLTS.  
Check for a minimum of 5 divisions of de-  
flection.

26. VERTICAL POSITION RANGE*a. Setup*

Set both VOLTS/DIV to 20mV and MODE to CH 1.  
Connect TYPE 191 to CH 1 INPUT.

*b. Check position range: + and -13.5  
to 16.5 div*

Adjust TYPE 191 for 3 div of 50 kHz signal  
with AMPLITUDE RANGE to 50-500mV. Switch  
AMPLITUDE RANGE to .5-5V and turn CH 1  
POSITION full ccw. Top of the waveform  
must be within 1.5 div of graticule cen-  
ter. Turn POSITION full cw and check  
that the bottom of the waveform is with-  
in 1.5 div of graticule center.

Change MODE to CH 2 and TYPE 191 signal to  
CH 2 INPUT. Repeat POSITION range check  
for CH 2.



27. ATTENUATOR ISOLATION*a. Setup*

Set CH 1 VOLTS/DIV to 2, CH 2 VOLTS/DIV to 5mV and CH 2 INPUT to GND. Connect TYPE 191 to CH 1 INPUT and adjust for 5 div of 20 MHz.

*b. Check attenuator isolation  
10,000:1, min at 20 MHz*

Switch MODE to CH 2 and check vertical deflection for .2 div, max.

Change CH 1 VOLTS/DIV to 5mV, CH 2 to 2 VOLTS/DIV and MODE to CH 1. Switch CH 1 input to GND and CH 2 input to DC. Apply TYPE 191 signal to CH 2 INPUT and check vertical deflection for .2 div, max.

28. TRIGGER LEVEL CENTERING*a. Setup*

CH 1 input selector	DC
MODE	CH 1
TRIGGER	NORM
A SWEEP MODE	AUTO TRIG
B SWEEP MODE	TRIGGERABLE AFTER DELAY TIME

Set TYPE 191 to 50 kHz and apply signal to CH 1 INPUT. Adjust for .2 div deflection and position display to horizontal center-line of graticule.

*b. Adjust A Trig Level Centering R462*

Center A TRIGGERING LEVEL and adjust R462 for stable display. Check that A SWEEP TRIG'D light is lit when sweep is triggered.

*c. Adjust Norm Trig DC Level Centering,  
R285*

Change A TRIGGERING COUPLING Switch to DC and adjust R285 for a stable display.

c. R285 is located on the vertical preamp board adjacent to the MODE switch.

28. (cont'd)

d. *Adjust CH 1 Trig Level Centering, R60*

Change TRIGGER switch to CH 1 only and adjust R60 for a stable display. Return TRIGGER to NORM.

d. R60 is located on the outside edge of the vertical preamp board.

e. *Adjust B Trig Level Centering, R662*

Set HORIZ DISPLAY to DELAYED SWEEP (B) and center B TRIGGERING LEVEL. Adjust R662 for a stable display.

Return HORIZ DISPLAY to A.

29. TRIGGERING

a. *Check high frequency triggering  
Jitter: 1ns, max*

Connect TYPE 191 OUTPUT -- 5ns cable --  
50Ω 2X attenuator -- 50Ω GR to BNC termination -- BNC T adapter -- 18" BNC cable -- CH 1 INPUT  
18" BNC cable -- A EXT TRIG INPUT

Set the TYPE 453 TIME/DIV to .1μSEC, MAG to X10 and A SWEEP MODE to NORM TRIG. Check for stable triggering as in the following table:

	<u>10 MHz</u>	<u>50 MHz</u>	<u>SOURCE</u>
INT AC	.2 div	1 div	INT
LF REJ	.2 div	1 div	INT
DC	.2 div	1 div	INT
EXT AC	50mV	200mV	EXT
LF REJ	50mV	200mV	EXT
DC	50mV	200mV	EXT

Change A SWEEP MODE to AUTO TRIG, SOURCE to INT, HORIZ DISPLAY to DELAYED SWEEP (B) and change the TYPE 191 signal connection to B EXT TRIG INPUT. Repeat 10 MHz and 50 MHz triggering checks for B sweep.

b. *Check HF REJ Requirement: triggering on 0.2 div of 50 kHz  
No triggering on 0.2 div at 1 MHz*

Set Sine-Wave Generator for .2 div of

29b. (cont'd)

50 kHz. Switch triggering to HF REJ, INT and check that stable triggering can be obtained. Change to 1 MHz and check that sweep will not trigger.

Change HORIZ DISPLAY to DELAYED SWEEP (B) and repeat.

*c. Check low frequency triggering*

Remove the TYPE 191 signal. Connect the SINEWAVE GENERATOR -- 50 $\Omega$  cable --

BNC T adapter -- 18" BNC cable -- CH 1 INPUT  
18" BNC cable -- A EXT TRIG INPUT

Adjust the SINEWAVE GENERATOR controls for a 50mV display of 30Hz signal and check A and B LF triggering as follows:

<u>COUPLING</u>	<u>INT</u>	<u>EXT</u>
AC	.2 div	50mV
HF REJ	.2 div	50mV

Switch HORIZ DISPLAY to A and repeat 30 Hz triggering checks.

*d. Check LF REJ*

*Requirement: triggering on 0.2 div of 30 kHz*

*No triggering on 0.2 div at 100 Hz*

Change SINE-WAVE GENERATOR to 30 kHz and trigger COUPLING to LF REJ. Check for stable triggering. Change to 100 Hz and check that sweep will not trigger.

Repeat for A SWEEP. Return COUPLING to AC.

*e. Check SINGLE SWEEP*

*Requirement: triggers with same triggering level setting as in NORM TRIG*

Change SINE-WAVE GENERATOR to 1 kHz and A TRIGGERING COUPLING to AC. Adjust A TRIGGERING LEVEL so display is just triggered. Remove signal from INPUT and switch to SINGLE SWEEP. Push RESET button and check that light comes on. Re-apply signal to INPUT and check that sweep runs and light extinguishes.

## 29. (cont'd)

- f. *Check LINE triggering*  
*Requirement: triggering on*  
*correct polarity*

Set CH 1 VOLTS/DIV to 10, TIME/DIV to 2mSEC and TRIGGERING SOURCE to LINE. Connect 10X probe from CH 1 INPUT to line voltage source. Check for correct line trigger polarity with SLOPE to + and -.

Switch A SWEEP MODE to AUTO TRIG and HORIZ DISPLAY to DELAYED SWEEP (B). Repeat line triggering check.

Remove probe.

30. TRIGGERING LEVEL RANGE

- a. *Setup*

Connect SAC OUTPUT to CH1 INPUT and B EXT TRIG INPUT using T connector. Set SAC to 2 VOLTS + DC MIXED. Set COUPLING to DC and SOURCE to EXT.

- b. *Check EXT LEVEL range + and - 2V, min*

With SLOPE in + turn LEVEL full cw and check that display is not triggered.

Change SAC to -DC and SLOPE to -. Turn LEVEL full ccw and check that display is not triggered.

- c. *Check EXT ÷ 10 LEVEL range + and - 20V, min*

Change SAC to 20V and SOURCE to EXT ÷ 10. Repeat LEVEL range checks in + and - SLOPE.

Change HORIZ DISPLAY to A and SAC signal to A EXT TRIG INPUT. Repeat EXT and EXT ÷ 10 LEVEL range checks for A trigger. Remove SAC signal and return TRIGGERING SOURCE to INT.

31. SWEEP RECOVERY    0.2 div of sweep  
shift, max

Set A SWEEP MODE to AUTO TRIG, TIME/DIV to 5 $\mu$ SEC and MAG to X10. Position start of sweep to center of graticule. Rotate HF STAB thru its range and check shift of sweep start for 0.2 div of sweep shift, max.

32. AUTO RECOVERY TIME

*a. Setup*

Connect the TYPE 184 MARKER OUTPUT to TYPE 453 CH 1 INPUT and press the 50mS MARKER SELECTOR. Set CH 1 VOLTS/DIV to .5, TIME/DIV to 50 $\mu$ SEC, MAG OFF and A SWEEP MODE to AUTO.

*b. Check AUTO recovery time: 50 to 100mS*

Check that stable triggering may be obtained by adjusting the LEVEL control. Press the .1S MARKER SELECTOR. Check that sweep will not trigger stably on the leading edge of the marker.

33. SWEEP START, A SWEEP CAL

*a. Setup*

A TIME/DIV	1mSEC
B TIME/DIV	5 $\mu$ SEC
B SWEEP MODE	B STARTS AFTER DELAY TIME
HORIZ DISPLAY	A INTEN DURING B

Set TYPE 184 for 1mS markers.

*b. Preset B Sweep Start, R758*

Set DELAY-TIME MULTIPLIER to 1.00. Adjust R758 so intensified portion starts at 2nd marker.

*c. Preset A Sweep Cal, R531*

Set DELAY-TIME MULTIPLIER to 9.00. Adjust R531 so intensified portion starts at 10th marker.

## 33. (cont'd)

*d. Adjust Sweep Start and A Sweep Cal*

Set HORIZ DISPLAY to DELAYED SWEEP (B) and DELAY-TIME MULTIPLIER to 1.00. Adjust R758 so displayed pulse starts at the beginning of the sweep.

Set DELAY-TIME MULTIPLIER to 9.00 and adjust R531 so displayed pulse starts at beginning of the sweep.

Repeat sweep start and A Sweep Cal adjustments as necessary.

---

 34. DELAY-TIME MULTIPLIER LINEARITY ±1.5 minor div, max

Set DELAY TIME MULTIPLIER to 8.00. Rotate the dial as necessary to position start of pulse to beginning of sweep. Note deviation of dial reading from 8.00: 1.5 minor div, max.

Repeat check for each major div of the DELAY-TIME MULTIPLIER dial between 8.00 and 2.00.

---

 35. NORM GAIN

Set HORIZ DISPLAY to A and adjust R835 for 1 marker per div.

Unless noted otherwise, use the middle 8 horizontal div when adjusting or checking timing.

---

 36. B SWEEP CAL

Set DELAY-TIME MULTIPLIER full ccw, B SWEEP MODE to B TRIGGERABLE AFTER DELAY TIME, HORIZ DISPLAY to DELAYED SWEEP (B) and B TIME/DIV to 1mSEC. Adjust R741 for 1 marker per div.

37. X10 MAG

- a. *Adjust Mag Gain, R845*  
*Error:  $\pm 1\%$ , max*

Press the TYPE 184 .1mS MARKER SELECTOR.  
Set HORIZ DISPLAY to A and MAG to X10.  
Adjust R845 for 1 marker per division.

- b. *Check linearity*  
*Non-linearity  $\pm 1\%$ , max*

Check linearity over the entire sweep.  
Non-linearity over any 8 division portion of the sweep must not exceed  $\pm 1\%$ .

- c. *Adjust Mag Regis, R855*  
*Shift:  $\pm 0.1$  division, max*

Press the TYPE 184 5mS MARKER SELECTOR.  
Position the middle marker to graticule center. Set the MAG to OFF and adjust R855 to place the center marker on graticule center. Repeat the adjustment until no shift occurs as MAG is switched between X10 and OFF.

38. SWEEP LENGTH

- a. *Check B sweep length:*  
*11 divisions  $\pm 0.5$  division, max*

Set A TIME/DIV to 2mSEC, B TIME/DIV to 1mSEC and HORIZ DISPLAY to DELAYED SWEEP (B). Press TYPE 184 1mS and .1mS MARKER SELECTORS. Check B sweep length for 10.5 to 11.5 divisions.

- b. *Check A sweep length:*  
*From 4 divisions or less to*  
*11 divisions  $\pm 0.5$  division, max.*

Change the HORIZ DISPLAY to A and A TIME/DIV to 1mSEC. With A SWEEP LENGTH at FULL check the sweep length for 10.5 to 11.5 divisions. Turn the A SWEEP LENGTH full ccw and check the sweep length for 4 divisions, max.

Return A SWEEP LENGTH to FULL.

---

### 39. VARIABLE RANGE

a. *Check A VARIABLE range: 2.5:1, min*

Change the TYPE 184 markers to 10ms. Turn A VARIABLE full ccw and note the spacing between markers: 4 divisions, max. Check that the UNCAL neon is lit when the VARIABLE is in any position except full cw (CAL).

b. *Check B VARIABLE range: 2.5:1, min*

Set A TIME/DIV to 5mSEC, B TIME/DIV to 1mSEC and HORIZ DISPLAY to DELAYED SWEEP (B). Turn B VARIABLE (right side of instrument), full ccw and note the spacing between markers: 4 divisions, max.

Check that the UNCAL neon is lit when the VARIABLE is in any position except full cw (CAL).

---

### 40. POSITION RANGE

a. *Check ↔ POSITION range: Ends of sweep to graticule center*

Return the HORIZ DISPLAY to A and set A TIME/DIV to 1mSEC. Turn the ↔ POSITION full cw. The start of the sweep must be to the right of graticule center. Turn the ↔ POSITION full ccw. The end of the sweep must be to the left of graticule center.

b. *Check ↔ POSITION FINE range: 5 to 8 divisions*

Position the right marker to graticule center. Set MAG to X10 and check the range of the FINE control. Must be between 5 and 8 divisions. Return MAG to OFF.



41. 1 $\mu$ SEC/DIV TIMING*a. Adjust C530A*

Change the TYPE 184 markers to 1 $\mu$ S.  
Set A and B TIME/DIV to 1 $\mu$ SEC. Ad-  
just C530A for 1 mark per division.

*b. Adjust C740A*

Set the HORIZ DISPLAY to DELAYED SWEEP  
(B). Adjust C740A for 1 mark per di-  
vision.

42. HIGH SPEED TIMING*a. Setup*

Set A and B TIME/DIV to .1 $\mu$ SEC and HORIZ  
DISPLAY to A. Change the TYPE 184 mark-  
ers to 20nS. Position the start of the  
display to the left edge of the graticule.  
Change the MAG to X10.

*b. Adjust horizontal amplifier transient response*

Adjust C882 and C892 to obtain equal  
spacing between each cycle to the left  
and right of graticule center.

Keep C882 and C892 adjustments approxi-  
mately equal.

*c. Check high speed X10 MAG timing  
Error:  $\pm 3\%$ , max over the entire  
sweep excluding the first and  
last 3 div*

Check timing accuracy over the entire  
length of the sweep excluding the first  
and last 3 cycles of the displayed wave-  
form.

c. When determining the first and  
last 3 cycles of the display, keep  
the intensity below the point of  
overriding the blanking voltage.

43. A SWEEP TIME/DIV*a. Check timing with MAG OFF, .1 $\mu$ SEC  
to 5 $\mu$ SEC Error:  $\pm 2\%$ , max  
(0.16 div in 8 div)*

Switch MAG to OFF and check TIME/DIV  
accuracy as follows:

43a. (cont'd)

<u>A TIME/DIV</u>	<u>TYPE 184</u>	<u>CHECK FOR</u>
.1μSEC	.1μS	1 mark/div
.2μSEC	.1μS	2 marks/div
.5μSEC	.5μS	1 mark/div
1μSEC	1μS	1 mark/div
2μSEC	1μS	2 marks/div
5μSEC	5μS	1 mark/div
.1 SEC	.1S	1 mark/div
.2 SEC	.1S	2 marks/div
.5 SEC	.5S	1 mark/div
1 SEC	1S	1 mark/div
2 SEC	1S	2 marks/div
5 SEC	5S	1 mark/div

b. Check timing with X10 MAG .1 SEC to 5 SEC/DIV Error: ±3%, max (0.24 div in 8 div)

Set MAG to X10 and check accuracy of entire sweep except as noted.

<u>TIME/DIV</u>	<u>TYPE 184</u>	<u>CHECK FOR</u>	<u>DISREGARD</u>
.1μSEC	10nS	1 cycle/div	First and last 3 cycles
.2μSEC	20nS	1 cycle/div	First and last 3½ cycles
.5μSEC	50nS	1 cycle/	First 2 cycles
1μSEC	.1μS	1 cycle/div	First div
2μSEC	.1μS	2 cycles/div	First div
5μSEC	.5μS	1 mark/div	First div

44. B SWEEP TIME/DIV

a. Check timing with MAG OFF Error: ±2%, max

Set DELAY TIME MULTIPLIER to 0.50 and HORIZ DISPLAY to DELAYED SWEEP (B). Check B sweep timing as follows: max error, ±.16 div.

44a. (cont'd)

<u>B TIME/DIV</u>	<u>TYPE 184</u>	<u>CHECK FOR</u>
.1 $\mu$ SEC	.1 $\mu$ S	1 cycle/div
.2 $\mu$ SEC	.1 $\mu$ S	2 cycles/div
.5 $\mu$ SEC	.5 $\mu$ S	1 mark/div
1 $\mu$ SEC	1 $\mu$ S	1 mark/div
2 $\mu$ SEC	1 $\mu$ S	2 mark/div
5 $\mu$ SEC	5 $\mu$ S	1 mark/div
10 $\mu$ SEC	10 $\mu$ S	1 mark/div
20 $\mu$ SEC	10 $\mu$ S	2 marks/div
50 $\mu$ SEC	50 $\mu$ S	1 mark/div
.1mSEC	.1mS	1 mark/div
.2mSEC	.1mS	2 marks/div
.5mSEC	.5mS	1 mark/div
1mSEC	1mS	1 mark/div
2mSEC	1mS	2 marks/div
5mSEC	5mS	1 mark/div
10mSEC	10mS	1 mark/div
20mSEC	10mS	2 marks/div
50mSEC	50mS	1 mark/div
.1 SEC	.1 S	1 mark/div
.2 SEC	.1 S	2 marks/div
.5 SEC	.5 S	1 mark/div

b. Check timing with X10 MAG Error: .1 $\mu$ SEC  
to 5 $\mu$ SEC  $\pm 3\%$ , max (0.24 div in 8 div)

Set MAG to X10 and check accuracy of entire sweep except as noted.

<u>TIME/DIV</u>	<u>TYPE 184</u>	<u>CHECK FOR</u>	<u>DISREGARD</u>
.1 $\mu$ SEC	20nS	1 cycle/2 div	First and last 3 cycles
.2 $\mu$ SEC	20nS	1 cycle/div	First and last 3 $\frac{1}{2}$ cycles
.5 $\mu$ SEC	50nS	1 cycle/div	First 2 cycles
1 $\mu$ SEC	.1 $\mu$ S	1 cycle/div	First div
2 $\mu$ SEC	.1 $\mu$ S	2 cycles/div	First div
5 $\mu$ SEC	.5 $\mu$ S	1 mark/div	First div

#### 45. DELAY TIME ACCURACY

1 $\mu$ SEC to 50mSEC Error:  $\pm 1\%$ , max  
.1 SEC to 5 SEC Error:  $\pm 2\%$ , max

Set HORIZ DISPLAY to DELAYED SWEEP (B) and B SWEEP MODE to B STARTS AFTER DELAY TIME.

Check the following sweep speeds by adjusting DELAY-TIME MULTIPLIER so start of sweep occurs at top of 2nd marker (approx 1.00). Note dial error from 1.00.

45. (cont'd)

Turn dial so start of sweep occurs at top of 10th marker (approx 9.00). Error difference between 2nd and 10th markers may now be determined from the dial.

<u>A TIME/DIV</u>	<u>B TIME/DIV</u>	<u>TYPE 184</u>	<u>Max error on dial</u>
1μSEC	.1μSEC	1μS	±8 minor div
2μSEC	.1μSEC	1μS	
5μSEC	.5μSEC	5μS	
10μSEC	1μSEC	10μS	
20μSEC	1μSEC	10μS	
50μSEC	5μSEC	50μS	
.1mSEC	10μSEC	.1mS	
.2mSEC	10μSEC	.1mS	
.5mSEC	50μSEC	.5mS	
1mSEC	.1mSEC	1mS	
2mSEC	.1mSEC	1mS	
5mSEC	.5mSEC	5mS	
10mSEC	1mSEC	10mS	
20mSEC	1mSEC	10mS	
50mSEC	5mSEC	50mS	
.1 SEC	10mSEC	.1 S	±16 minor div
.2 SEC	10mSEC	.1 S	
.5 SEC	50mSEC	.5 S	
1 SEC	.1 SEC	1 S	
2 SEC	.1 SEC	1 S	
5 SEC	.5 SEC	5 S	

46. DELAY TIME JITTER 0.3 div, max

Set A TIME/DIV to 1mSEC and B TIME/DIV to 1μSEC. Set TYPE 184 for 1ms markers and line voltage to 126 VAC.

Adjust DELAY TIME MULTIPLIER to about 1.00 to display pulse on screen. Note jitter on pulse leading edge: 0.3 div, max.

Adjust DELAY TIME MULTIPLIER to about 9.00 to display pulse on screen. Note jitter on pulse leading edge: 0.3 div, max.

Remove TYPE 184 signal and return line voltage to 115 VAC.

47. EXT HORIZ*a. Setup*

CH 1 POSITION	midr
CH 1 VOLTS/DIV	20mV
MODE	CH 2
TRIGGER	CH 1 ONLY
HORIZ DISPLAY	EXT HORIZ
B TRIGGERING SOURCE	INT
B TRIGGERING COUPLING	DC

*b. Adjust Ext Horiz Gain, R645**Error: ±2%, max*

Apply a .1 volt signal from the SAC to CH 1 INPUT. Adjust R645 for 5 divisions of horizontal deflection.

*c. Check deflection factor**EXT: 270mV/div ±15%**EXT ÷ 10: 2.7V/div ±20%*

Change B TRIGGERING SOURCE to EXT and connect the SAC signal cable to EXT TRIG INPUT or EXT HORIZ. Set SAC AMPLITUDE to 2 VOLTS. Check for 6.3 to 8.52 divisions of horizontal deflection.

Change B TRIGGERING SOURCE to EXT ÷ 10 and SAC AMPLITUDE to 20 VOLTS. Check for 5.92 to 8.89 divisions of horizontal deflection. Remove the SAC signal connection.

*d. Check bandwidth 5MHz or more at -3dB*

Connect TYPE 191 -- 5ns cable -- 50Ω GR to BNC termination -- TYPE 453 CH 1 INPUT.

Set B TRIGGERING SOURCE to INT and adjust the TYPE 191 for 6 divisions of 50 KHz signal. Increase TYPE 191 frequency until the deflection is reduced to 4.2 divisions. Read the -3dB high frequency from the TYPE 191 dial.

Remove the TYPE 191 signal connection.

48. CHOPPED OPERATION*a. Setup*

MODE	CHOP
TRIGGER	NORM
TIME/DIV	.5 $\mu$ SEC
HORIZ DISPLAY	A

*b. Check chopped frequency:  
500 KHz  $\pm$ 20%, max*

Position the traces 4 div apart and adjust LEVEL for a stable display. Check the duration of one complete cycle of chopped waveform for 1.6 to 2.4 $\mu$ SEC.

*c. Check blanking*

Check for complete blanking of switching transients between chopped segments with the INTENSITY control centered.

49. CALIBRATOR*a. Setup*

Set MODE to ALT and TIME/DIV to 1mSEC. Connect 1 KC CAL to CH 1 INPUT and TYPE 184 MARKER OUTPUT to CH 2 INPUT. Set TYPE 184 for 1ms markers. Adjust TRIGGERING LEVEL and POSITION for stable display.

*b. Adjust Cal Freq, T1225: 1 kHz  $\pm$ 0.05%*

Adjust T1225 for one cycle of calibrator waveform for each 1mS marker.

Switch TRIGGER to CH 1 ONLY and adjust T1225 for minimum drift of time marks. Drift must not exceed 5 div in 10 seconds.

Remove time marks and set MODE to CH 1.

*c. Check duty cycle: 50%  $\pm$ 0.8%*

Set A TIME/DIV to .1mSEC. Center displayed waveform on graticule and switch MAG to X10. Switch A TRIGGERING SLOPE to + and - and note horizontal shift between rising and falling portions of waveform. Must not be more than 1.6 div.

## 49. (cont'd)

d. *Check risetime 1 $\mu$ s, max*

Set MAG to OFF, A TIME/DIV to .2 $\mu$ SEC and A TRIGGERING SLOPE to +. Check 10% to 90% risetime of calibrator waveform for 1 $\mu$ s, max.

e. *Check PROBE LOOP*

Connect TYPE 453 PROBE LOOP -- P6019 probe -- Passive termination -- test scope input.

Set the passive termination slide switch to 2mA/mV and test scope VOLTS/DIV to 50mV. Check for a square wave display on the test scope.

## 50. Z AXIS

a. *Adjust compensation C1036*

Set CH 1 VOLTS/DIV to .5, TIME/DIV to .1 $\mu$ SEC, A SWEEP MODE to AUTO TRIG and A TRIGGERING LEVEL cw. Connect 10X probe from TP1047 to CH 1 INPUT. Adjust INTENSITY so displayed waveform amplitude is 3 div. Adjust C1036 for optimum square-wave.

b. *Check sensitivity: 5V, min*

Connect 5 volt SAC signal to Z AXIS INPUT and A EXT TRIG INPUT using T connector and clip lead to BNC adapter. Remove GND strap and connect black lead of adapter to GND post. Set TIME/DIV to .5mSEC and A TRIGGERING SOURCE to EXT. Check for trace modulation at normal intensity.

Remove the SAC signal from Z AXIS INPUT.

c. *Check max usable frequency: 50MHz, min*

Set the TYPE 191 for 5V of 50MHz signal and connect TYPE 191 -- 5ns cable -- 50 $\Omega$  GR to BNC termination -- BNC T adapter -- clip-lead adapter -- Z AXIS INPUT Probe adapter -- 10X Probe -- TYPE 453 vert INPUT.

## 50c. (cont'd)

Set TIME/DIV to .2 $\mu$ SEC and MAG to X10.  
Reduce INTENSITY to a low level and check for noticeable intensity modulation of the trace.

Disconnect signal and replace GND strap.

51. B END A*a. Setup*

A TIME/DIV	1mSEC
B TIME/DIV	.1mSEC
A SWEEP MODE	AUTO TRIG
B SWEEP MODE	B STARTS AFTER DELAY TIME
HORIZ DISPLAY	A INTEN DURING B
A SWEEP LENGTH	B ENDS A

*b. Check B ENDS A operation*

Turn DELAY-TIME MULTIPLIER thru its range and check that A sweep ends after intensified portion.

Return A SWEEP LENGTH to FULL and HORIZ DISPLAY to A.

52. TRACE FINDER

trace must not  
position off graticule

Push in TRACE FINDER and turn vertical and horizontal POSITION controls full cw and ccw. Check that the trace remains within the graticule area.

53. A AND B GATES*a. Check A GATE amplitude: 12V  $\pm$ 5%, max*

With A SWEEP MODE in AUTO TRIG turn LEVEL full cw. Connect A GATE to test scope INPUT.

Check for 12V  $\pm$ 5% gate waveform the duration of which will be the total sweep time of the TYPE 453.



53. (cont'd)

b. *Check B GATE amplitude: 12V ±5%, max*

Set HORIZ DISPLAY to DELAYED SWEEP (B) and DELAY-TIME MULTIPLIER full ccw. Connect B GATE to test scope INPUT.

Check waveform for 12V ±5%.

54. HOLDOFF

a. *Check HF STAB Holdoff: 0.2μS, min*

Set HORIZ DISPLAY to A and connect A GATE to test scope input. Set A TIME/DIV to .1μSEC and check change in duration of negative portion of waveform while adjusting HF STAB for at least .2μSEC.

Leave HF STAB set for min duration of waveform.

b. *Check A sweep holdoff*

Check duration of negative portion of gate waveform at all sweep speeds as follows:

<u>TIME/DIV</u>	<u>holdoff</u>
.1μSEC to 5μSEC	less than 2.5μs
10, 20 and 50μSEC	3.5-10μs
.1, .2 and .5mSEC	35-100μs
1, 2 and 5mSEC	.35-1ms
10, 20 and 50mSEC	3.5-10ms
.1 SEC to 5 SEC	35-100ms

THE END

