



TEKTRONIX-GERMANY			
OFFICE-HAMBURG			
Title			
NT-7000 POWER SUPPLY			
Size	Document Number	REV	
B	GHH-9811-01	00	
Date:	September 15, 1968	Sheet	1 of 2



NT-7000 POWER-SUPPLY
GHH-8811-01

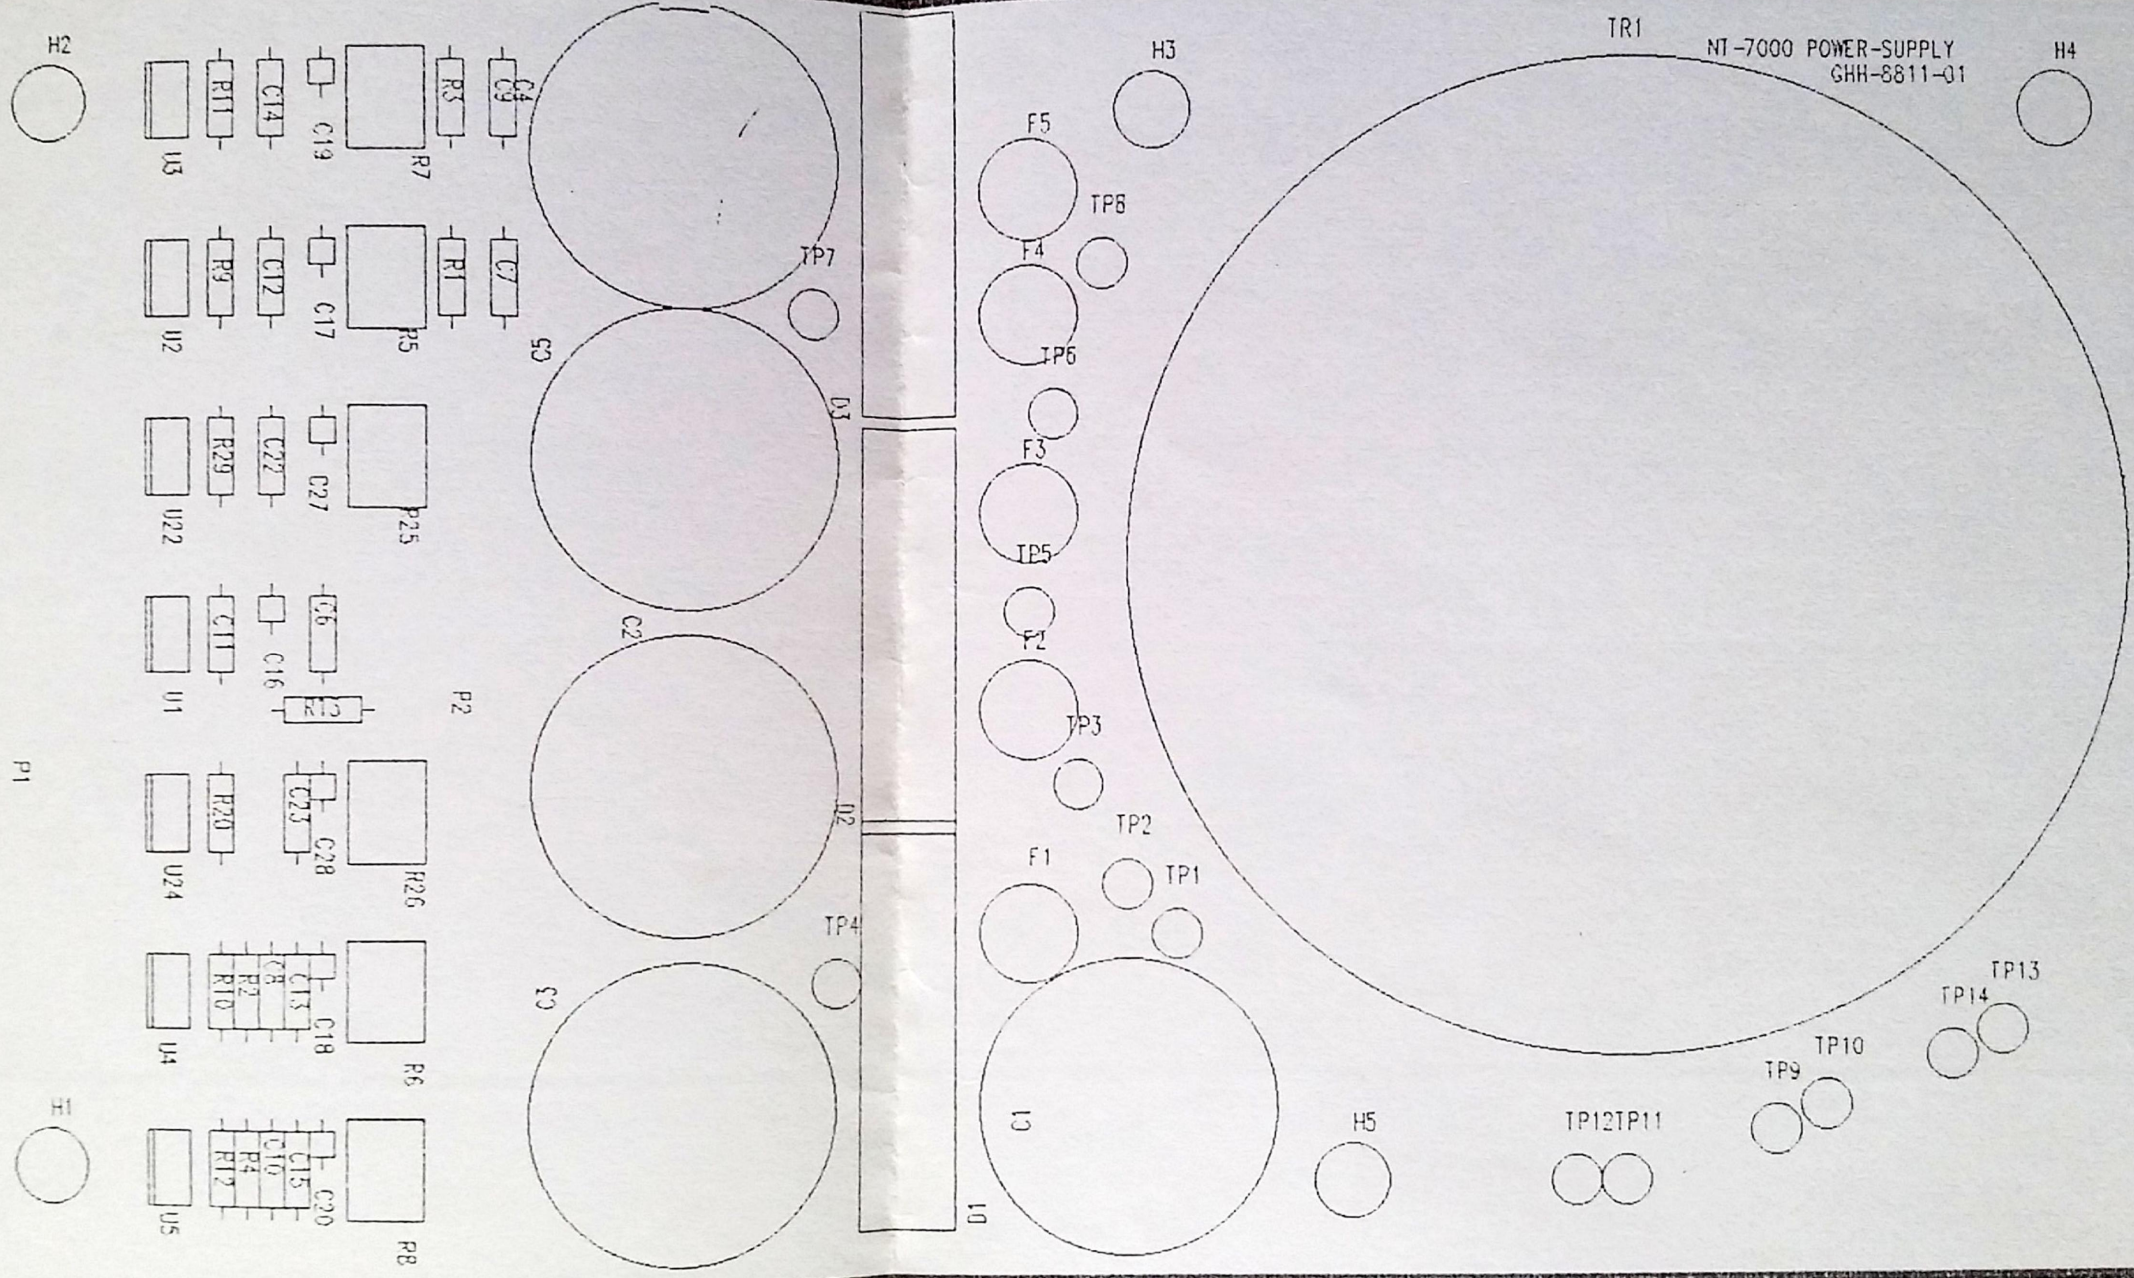

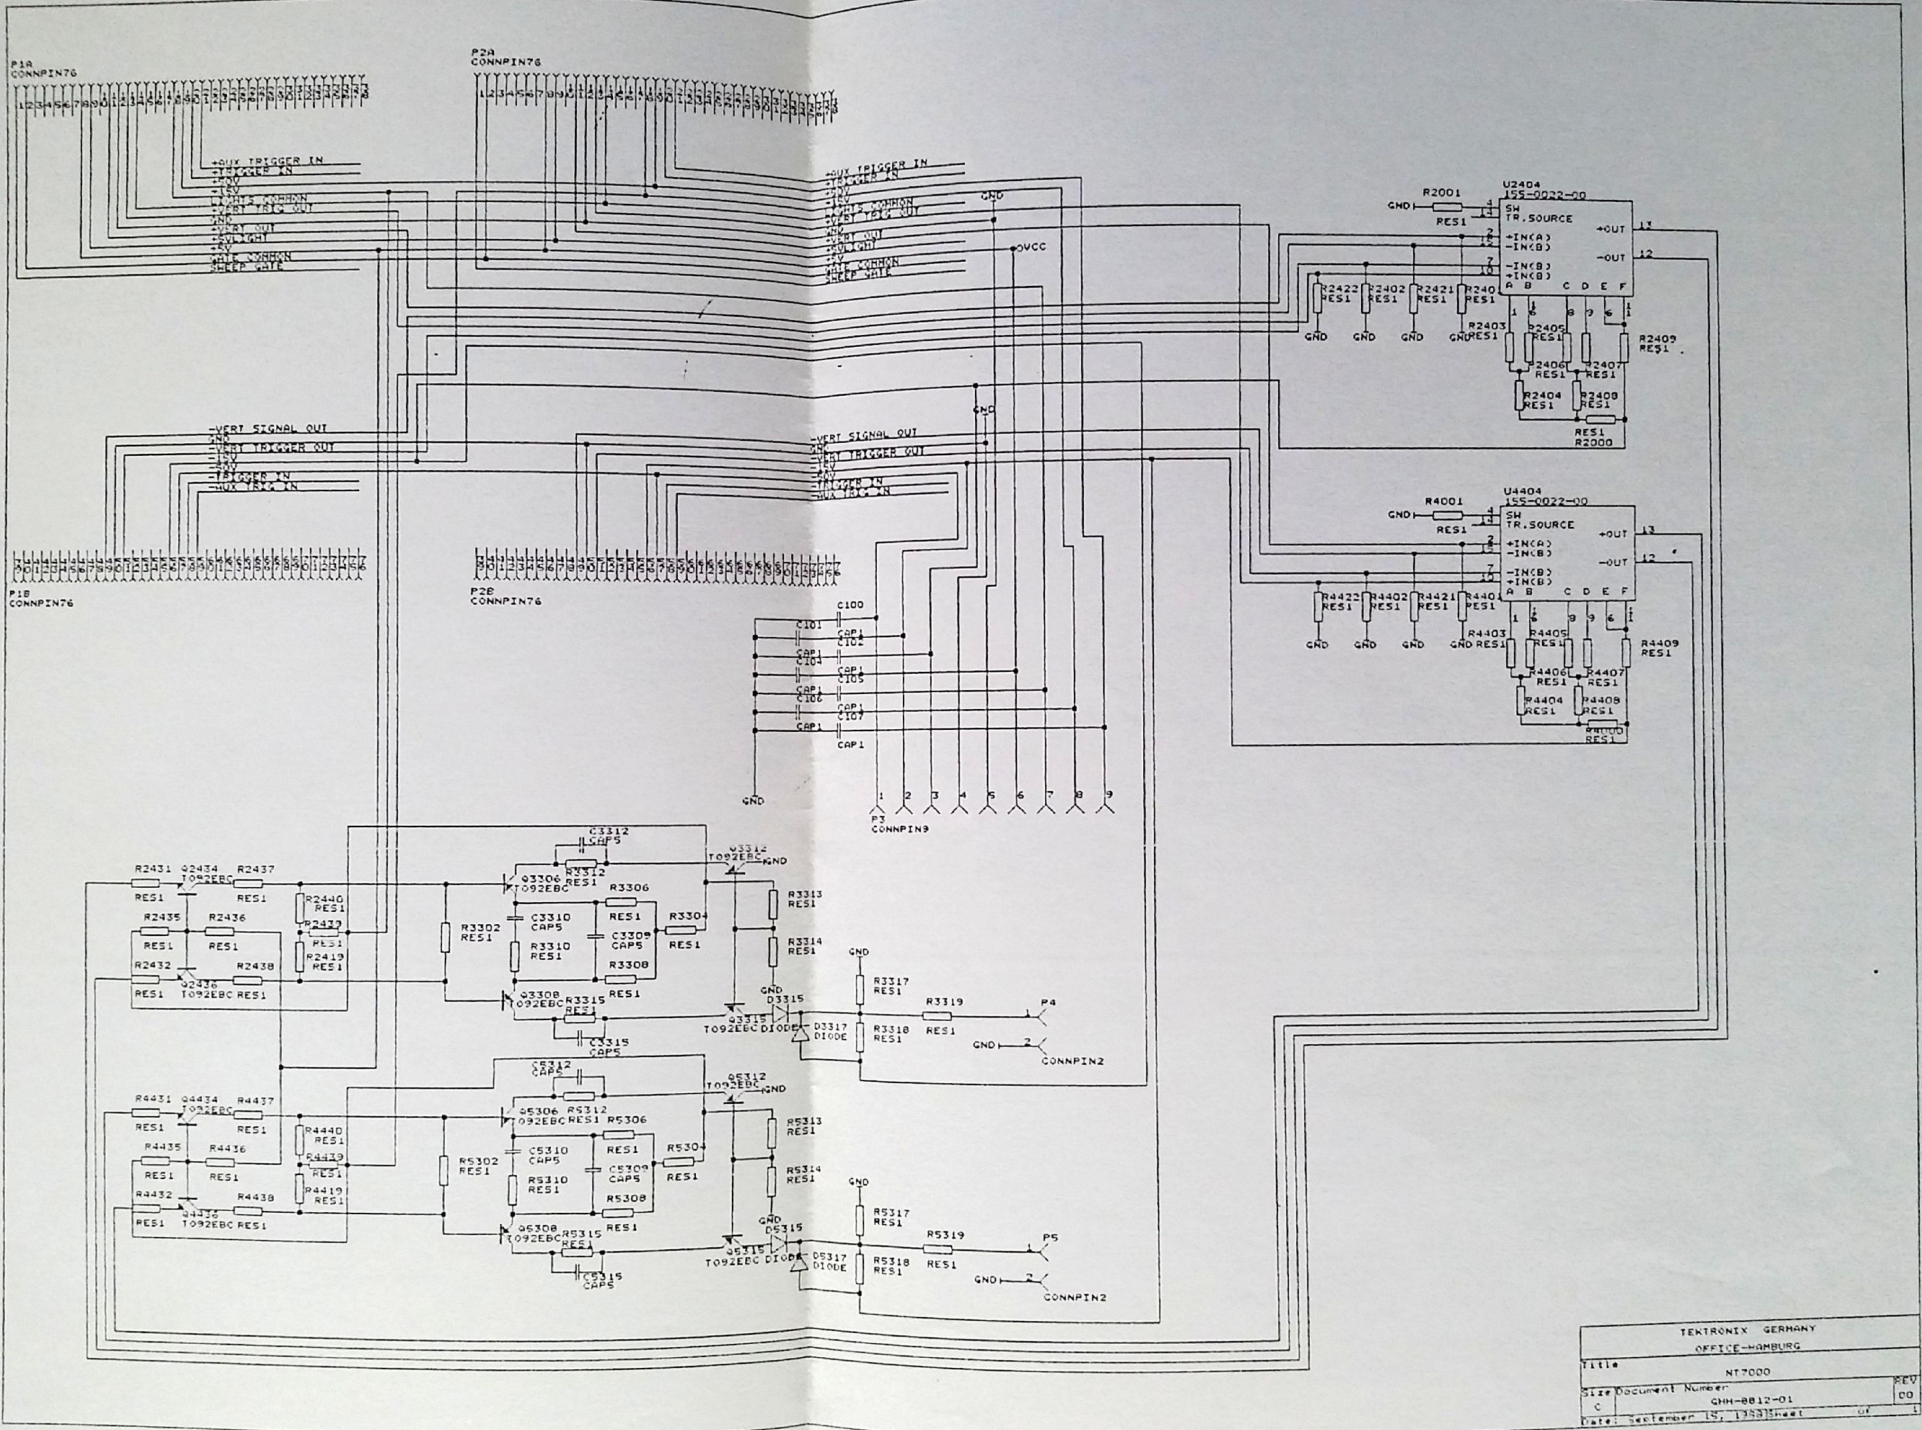

TEKTRONIX GERMANY OFFICE-HAMBURG		
Title	NT7000	REV
Size Document Number	GMH-0012-01	00
Date	September 15, 1953	Sheet 01 of 1

NT-7000 I INTERFACE
GHH-8812-01

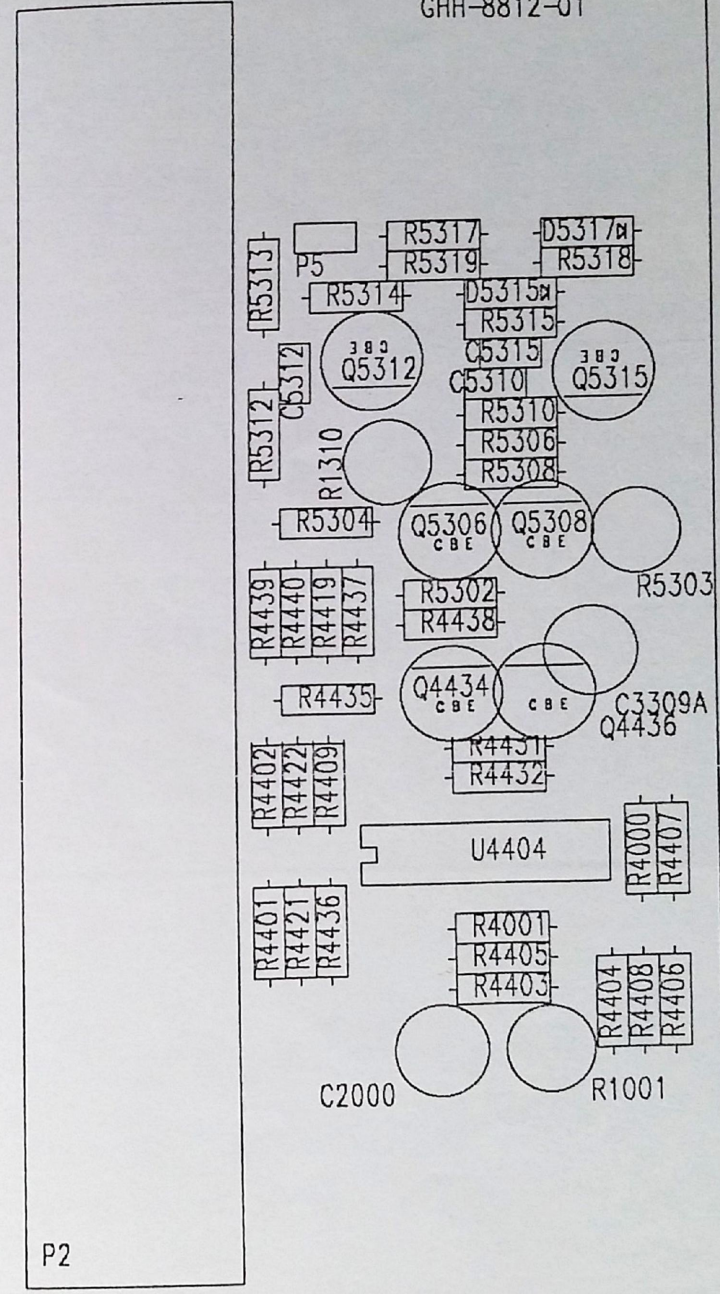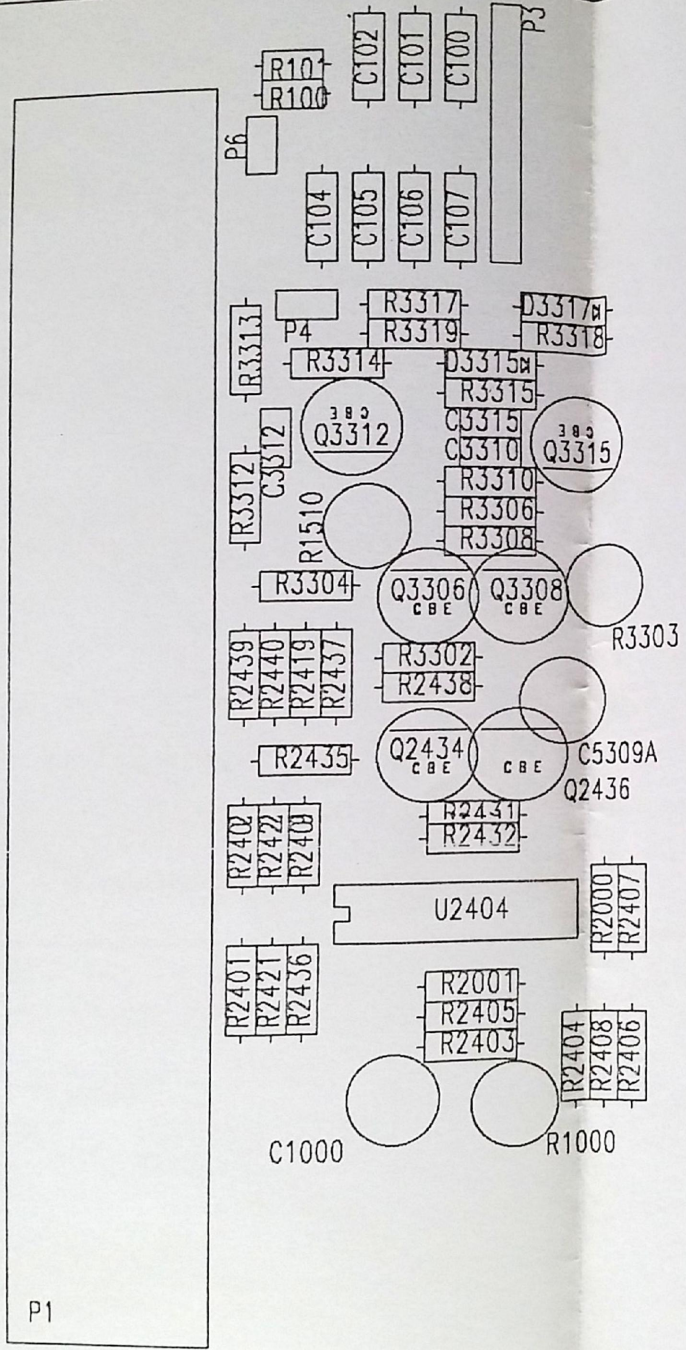

P1

P2

Partlist Power-Supply GHH-8811-01

C 1	6800µF/35V	
C 2	2200µF/63V	
C 3	2200µF/100V	
C 4	2200µF/100V	
C 5	2200µF/63V	
C 6	100nF	Glas
C 7	100nF	Glas
C 8	100nF	Glas
C 9	100nF	Glas
C10	100nF	Glas
C11	100nF	Glas
C12	100nF	Glas
C13	100nF	Glas
C14	100nF	Glas
C15	100nF	Glas
C16	22µF/15V	Tantal
C17	22µF/15V	Tantal
C18	22µF/15V	Tantal
C19	22µF/63V	
C20	22µF/63V	
C27	22µF/15V	Tantal
C28	22µF/15V	Tantal

D 1	B80C3700/2200
D 2	B40C3700/2200
D 3	B40C3700/2200

F 1	1.6AT	Fuse
F 2	2.5AT	Fuse
F 3	2.5AT	Fuse
F 4	1.0AT	Fuse
F 5	1.0AT	Fuse

R 1	100KΩ	Metall
R 2	100KΩ	Metall
R 3	100KΩ	Metall
R 4	100KΩ	Metall
R 5	5KΩ	Trimm
R 6	5KΩ	Trimm
R 7	5KΩ	Trimm
R 8	5KΩ	Trimm
R 9	110 Ω	Metall
R10	110 Ω	Metall
R11	110 Ω	Metall
R12	110 Ω	Metall
R13	220 Ω	Metall
R20	110 Ω	Metall
R25	5KΩ	Trimm
R26	5KΩ	Trimm
R29	110 Ω	Metall

TR1	Primär	2*110V 150VA
	Sekundär	16-0-16V 2.5A / 42-0-42V 0.35A / 9V 2A

C 100	100nF	Glas
C 101	100nF	Glas
C 102	100nF	Glas
C 104	100nF	Glas
C 105	100nF	Glas
C 106	100nF	Glas
C 107	100nF	Glas
C1000	7/35pF	Trimmer
C2000	7/35pF	Trimmer
C3309A	7/35pF	Trimmer
C3310	2.2nF	
C3315	1nF	
C5309A	7/35pF	Trimmer
C5310	2.2nF	
C5315	1nF	
D3315	1N4148	Diode
D3317	1N4148	Diode
D5315	1N4148	Diode
D5317	1N4148	Diode
P1	131-0767-03	Connector
P2	131-0767-03	Connector
P3		
Q2434	2N3904	Transistor
Q2436	2N3904	Transistor
Q3306	2N3906	Transistor
Q3308	2N3906	Transistor
Q3312	2N3906	Transistor
Q3315	2N3906	Transistor
Q4434	2N3904	Transistor
Q4436	2N3904	Transistor
Q5306	2N3906	Transistor
Q5308	2N3906	Transistor
Q5312	2N3906	Transistor
Q5315	2N3906	Transistor
R 100	68 Ω	Metall
R 101	68 Ω	Metall
R1000	1 K Ω	Trimmer
R1001	1 K Ω	Trimmer
R1310	5 K Ω	Trimmer
R1510	5 k Ω	Trimmer
R2000	43 Ω	Metall
R2001	1 K Ω	Metall
R2401	51 Ω	Metall
R2402	51 Ω	Metall
R2403	39 Ω	Metall
R2404	820 Ω	Metall
R2405	39 Ω	Metall
R2406	39 Ω	Metall
R2407	39 Ω	Metall

Partlist Interface cont.

R2408	1 K Ω	Metall
R2409	910 Ω	Metall
R2419	51 Ω	Metall
R2421	51 Ω	Metall
R2422	51 Ω	Metall
R2431	33 Ω	Metall
R2432	33 Ω	Metall
R2435	10 K Ω	Metall
R2436	330 Ω	Metall
R2437	220 Ω	Metall
R2438	220 Ω	Metall
R2439	68 Ω	Metall
R2440	51 Ω	Metall
R3302	91 Ω	Metall
R3303	500 Ω	Trimmer
R3304	82 Ω	Metall
R3306	16 Ω	Metall
R3308	16 Ω	Metall
R3310	470 Ω	Metall
R3312	150 Ω	Metall
R3313	2.4K Ω	Metall
R3314	3.3K Ω	Metall
R3315	150 Ω	Metall
R3317	2.2K Ω	Metall
R3318	1.5K Ω	Metall
R3319	100 Ω	Metall
R4000	43 Ω	Metall
R4001	1 K Ω	Metall
R4401	51 Ω	Metall
R4402	51 Ω	Metall
R4403	39 Ω	Metall
R4404	820 Ω	Metall
R4405	39 Ω	Metall
R4406	39 Ω	Metall
R4407	39 Ω	Metall
R4408	1 K Ω	Metall
R4409	910 Ω	Metall
R4419	51 Ω	Metall
R4421	51 Ω	Metall
R4422	51 Ω	Metall
R4431	33 Ω	Metall
R4432	33 Ω	Metall
R4435	10 K Ω	Metall
R4436	330 Ω	Metall
R4437	220 Ω	Metall
R4438	220 Ω	Metall
R4439	51 Ω	Metall
R4440	51 Ω	Metall
R5302	91 Ω	Metall
R5303	500 Ω	Trimmer
R5304	82 Ω	Metall
R5306	16 Ω	Metall
R5308	16 Ω	Metall
R5310	470 Ω	Metall
R5312	150 Ω	Metall

Partlist Interface cont.

R5313	2.4K Ω	Metall
R5314	3.3K Ω	Metall
R5315	150 Ω	Metall
R5317	2.2K Ω	Metall
R5318	1.5K Ω	Metall
R5319	100 Ω	Metall

U2404	155-0022-00	IC
U4404		

Partlist Cabinet

S 1	Power-Switch with Fuse-Holder	
F10	0.5AT	
F11	0.5AT	Reserve
D 4	LED	
M 1	Connector BNC Female	
M 2	Connector BNC Female	
M 3	Fan DC 12V	
M 4	Conn Body	352-0169-03
M 5	Conn Body	352-0167-06
M 5	Conn Body	352-0167-06
M 6	Slide	351-0295-00
M 7	Slide	351-0295-00