


TEKTRONIX

58

SHORT FORM
CATALOG

JUNE

1958

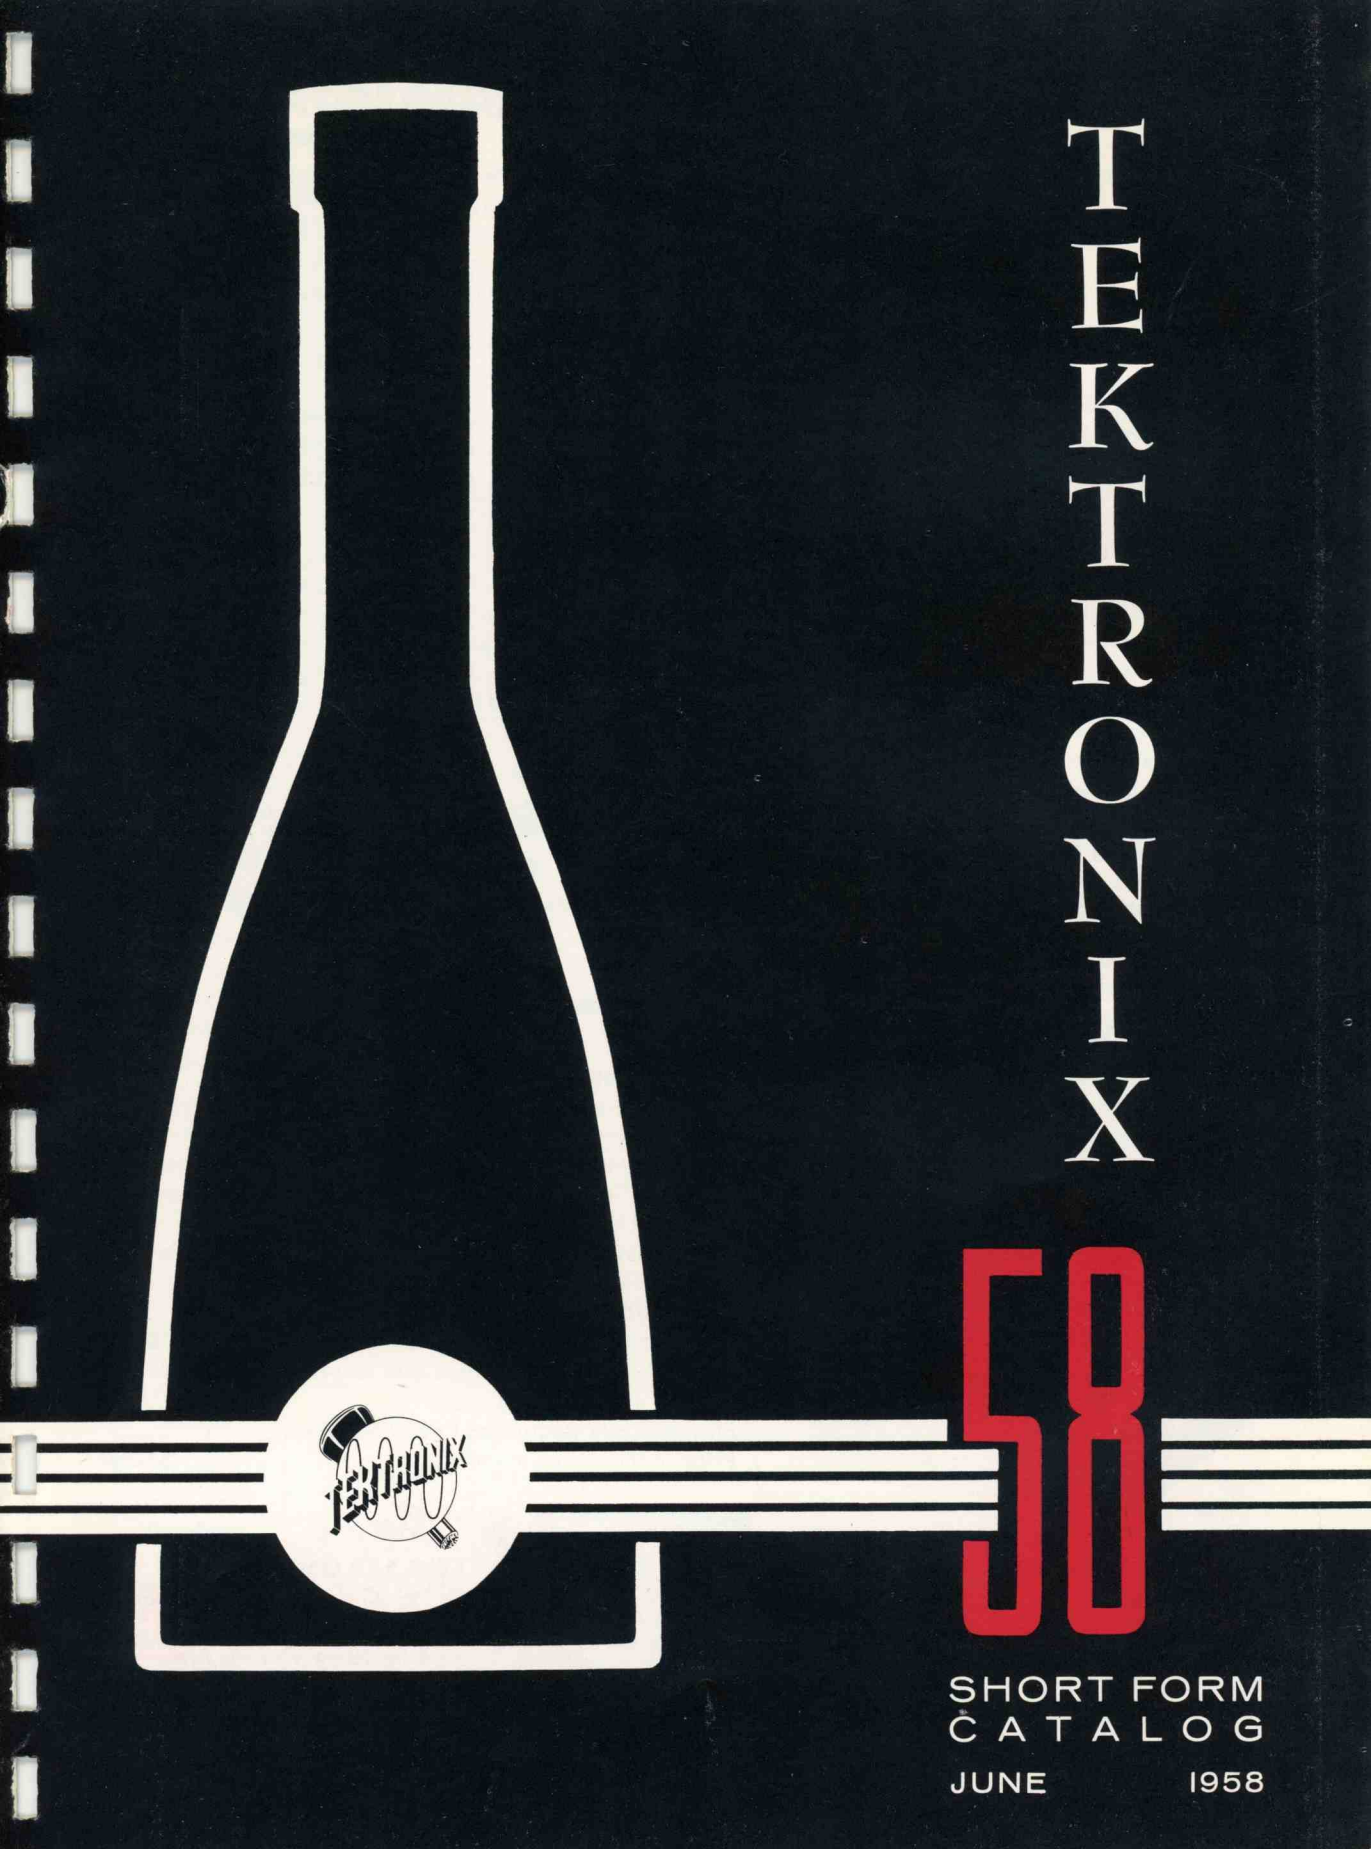

OSCILLOSCOPES WITH

Inherent characteristics of these Tektronix Oscilloscopes permit their conversion to many specialized applications through the use of interchangeable plug-in preamplifiers. Initial selection can include the Plug-In Units best suited to current requirements. When greater versatility becomes desirable, other available Type 53/54 Plug-In Units can be added at moderate cost to expand the application area.

TYPE 551 DUAL-BEAM OSCILLOSCOPE

Wide-Band Vertical Amplifiers

Main-unit risetimes—12 millimicroseconds.

Passbands and risetimes with Fast-Rise Plug-In Preamplifiers—dc to 25 mc, 0.014 μ sec.

Signal-Handling Versatility

All Type 53/54 Plug-In Units can be used in both channels.

0.2- μ sec Signal-Delay Networks.

Wide Sweep Range

0.02 μ sec/cm to 12 sec/cm. 24 calibrated steps from 0.1 μ sec/cm to 5 sec/cm.

Accurate 5x magnifier.

Single Sweeps—Lockout-reset circuitry.

Complete Triggering—Fully-automatic, or amplitude-level selection with preset or manual stability control.

10-kv Accelerating Potential

Brighter display for fast sweeps and low repetition rates.

Separate Power Supply—electronic regulation.

Price, without plug-in units \$1725

New



New

TYPE 533 OSCILLOSCOPE

High Performance

DC to 15 MC, 0.023- μ sec Risetime with Fast-Rise Plug-In Units.

0.2 μ sec Signal Delay.

0.02 μ sec/cm to 15 sec/cm Sweep Range.

Easy Operation

24 Calibrated direct-reading sweep rates, 0.1 μ sec/cm to 5 sec/cm.

Sweep Magnification—2, 5, 10, 20, 50 and 100 times.

Preset Triggering—Eliminates triggering adjustments in most applications.

Single-Sweep Operation—Lockout-reset circuitry for one-shot recording.

High Writing Rate

250 cm/ μ sec—10 kv accelerating potential assures bright trace for single sweeps and low repetition rates. 6 cm by 10 cm viewing area.

Electronically-Regulated Power Supplies.

Price, without plug-in units \$1050



New

TYPE 543 OSCILLOSCOPE

DC to 30 MC, 0.012- μ sec Risetime with Fast-Rise Plug-In Units.

4 cm by 10 cm Viewing Area.

All other characteristics same as Type 533.

Price, without plug-in units \$1200

PLUG-IN PREAMPLIFIERS



TYPE 541 OSCILLOSCOPE

Electrically identical to the Type 545, except that it is without provision for sweep delay.

Price, without plug-in units\$1145

TYPE 545 OSCILLOSCOPE

DC to 30 MC Main Vertical Amplifier

0.012- μ sec Risetime with Fast-Rise Plug-In Units.

Wide Sweep Range—24 calibrated sweep rates from 0.1 μ sec/cm to 5 sec/cm. 5-x magnifier extends calibrated range to 0.02 μ sec/cm. Continuously variable from 0.02 μ sec/cm to 12 sec/cm.

Sweep Delay—Triggered or conventional sweep delay from 1 μ sec to 0.1 sec in 12 calibrated ranges. Range accuracy within 1%, incremental accuracy within 0.2% of full scale. (Other delay ranges available on special order).

Versatile Triggering—Amplitude-level selection with preset or manual stability control, and fully-automatic triggering.

Balanced Delay Network—0.2- μ sec signal delay.

10-KV Accelerating Potential

Bright trace at low repetition rates. 4 by 10 cm linear display.

Amplitude Calibrator

0.2 mv to 100 v in 18 steps. Square wave, frequency about 1 kc.

Price, without plug-in units \$1450

TYPE 535 OSCILLOSCOPE

Same specifications as the Type 545, with the following exceptions:

DC to 11 MC Main Vertical Amplifier,
0.031- μ sec Risetime with Fast-Rise
Plug-In Units.

0.25- μ sec signal delay.

6 by 10 cm linear display.

Price, without plug-in units \$1300



TYPE 531 OSCILLOSCOPE

Electrically identical to the Type 535, except that it is without provision for sweep delay.

Price, without plug-in units\$995

Oscilloscopes with Plug-In Preamplifiers

	Vertical Frequency Response (with Type 53/54K Unit)	Signal Delay	Calibrated Sweep Range	Sweep Magnifier	Sweep Delay	Accelerating Potential	Price (without plug-in units)
TYPE 533	dc to 15 mc	0.2 μ sec	0.02 μ sec/cm to 5 sec/cm	2, 5, 10, 20 50, 100x	None	10 kv	\$1050
TYPE 543	dc to 30 mc						\$1200
TYPE 541 Fast-Rise	dc to 30 mc	0.2 μ sec	0.02 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$1145
TYPE 545 Fast-Rise	dc to 30 mc	0.2 μ sec	0.02 μ sec/cm to 5 sec/cm	5x	1 μ sec to 0.1 sec	10 kv	\$1450
TYPE 551 Dual-Beam	dc to 25 mc both beams	0.2 μ sec	0.02 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$1725
TYPE 531 General Purpose	dc to 11 mc	0.25 μ sec	0.02 μ sec/cm to 5 sec/cm	5x	None	10 kv	\$995
Type 535 General Purpose	dc to 11 mc	0.25 μ sec	0.02 μ sec/cm to 5 sec/cm	5x	1 μ sec to 0.1 sec	10 kv	\$1300
Type 536 X-Y Curve Tracer	dc to 11 mc	None	See Type 53/54T Time-Base Gen.		None	4 kv	\$995
TYPE 532 General Purpose	dc to 5 mc	None	0.2 μ sec/cm to 5 sec/cm	5x	None	4 kv	\$825

OSCILLOSCOPES WITH

TYPE 532 OSCILLOSCOPE

DC to 5 MC Main Vertical Amplifier

0.07- μ sec Risetime with Wide-Band Plug-In Units.

Sweep Range

21 calibrated sweep rates from 1 μ sec/cm to 5 sec/cm. 5-x magnifier extends calibrated range to 0.2 μ sec/cm. Continuously variable from 0.2 μ sec/cm to 12 sec/cm.

Triggering

Amplitude-level selection with preset

or manual stability control, and fully-automatic triggering.

4-KV Accelerating Potential

8 by 10 cm linear display.

Amplitude Calibrator


0.2 mv to 100 v in 18 steps. Square wave, frequency about 1 kc.

Electronically-Regulated Power Supplies.


Price, without plug-in units \$825



Type 53/54 Plug-In Units



TYPE 53/54A




TYPE 53/54B



TYPE 53/54C



TYPE 53/54D



TYPE 53/54E



TYPE 53/54G

CHARACTERISTICS OF PLUG-IN PREAMPLIFIERS

	Risetime and Passband of Combination — Plugged into Type				
	533	543-541-545	551	531-535-536	532
TYPE 53/54A Wide-Band DC	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc
TYPE 53/54B Wide-Band High-Gain	0.035 μ sec 2 c to 10 mc	0.03 μ sec 2 c to 12 mc	0.035 μ sec 2 c to 10 mc	0.04 μ sec 2 c to 9 mc	0.07 μ sec 2 c to 5 mc
	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc
TYPE 53/54C Dual-Trace DC	0.023 μ sec dc to 15 mc	0.015 μ sec dc to 24 mc	0.016 μ sec dc to 22 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc
TYPE 53/54D High-Gain DC Differential	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc	0.18 μ sec dc to 2 mc
TYPE 53/54E Low-Level AC Differential	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc	6 μ sec 0.06 cycles to 60 kc
TYPE 53/54G Wide-Band DC Differential	0.025 μ sec dc to 14 mc	0.018 μ sec dc to 20 mc	0.02 μ sec dc to 18 mc	0.035 μ sec dc to 10 mc	0.07 μ sec dc to 5 mc
TYPE 53/54H DC Coupled High-Gain Wide-Band	0.031 μ sec dc to 11 mc	0.023 μ sec dc to 15 mc	0.025 μ sec dc to 14 mc	0.037 μ sec dc to 9.5 mc	0.07 μ sec dc to 5 mc
TYPE 53/54K Fast-Rise DC	0.023 μ sec dc to 15 mc	0.012 μ sec dc to 30 mc	0.014 μ sec dc to 25 mc	0.031 μ sec dc to 11 mc	0.07 μ sec dc to 5 mc
TYPE 53/54L Fast-Rise High-Gain	0.023 μ sec 3 c to 15 mc	0.015 μ sec 3 c to 24 mc	0.023 μ sec 3 c to 15 mc	0.035 μ sec 3 c to 10 mc	0.07 μ sec 3 c to 5 mc
	0.023 μ sec dc to 15 mc	0.012 μ sec dc to 30 mc	0.014 μ sec dc to 25 mc	0.031 μ sec dc to 11 mc	0.07 μ sec dc to 5 mc

PLUG-IN PREAMPLIFIERS



TYPE 536 "X-Y" OSCILLOSCOPE

Identical Horizontal and Vertical Main Amplifiers

DC to 10 MC, both amplifiers, with Type 53/54G Differential Plug-In Preamplifiers.

Less than 1° relative phase difference from dc to 15 mc. Phase balance can be obtained at any one frequency to over 25 mc.

Converts to general-purpose oscillo-

scope with Type 53/54T Time-Base Unit plugged into horizontal amplifier.

4-KV Accelerating Potential

10 by 10 division viewing area.

Amplitude Calibrator

0.2 mv to 100 v in 18 steps. Square wave, frequency about 1 kc

Electronically-Regulated Power Supplies.

Price, without plug-in units\$995



TYPE 53/54K



TYPE 53/54L




Type 53/54T Time-Base Generator—Provides the sweep voltages necessary for operating the Type 536 in the usual oscilloscope applications. Generates 22 calibrated sweep rates from 0.2 μ sec/div to 2 sec/div. 5-x magnifier is accurate at all sweep rates. Triggering is fully automatic, or manual with amplitude-level selection and preset or manual stability control. **Price \$225.**



Type 53/54H Plug-In Unit—a wide-band preamplifier with dc-coupling over its entire sensitivity range. Provides a maximum deflection factor of 5 mv/cm, dc-coupled, in all Tektronix Oscilloscopes with the Plug-In Feature. Passband and risetime with Type 533 Oscilloscope—dc to 11 mc, 0.031 μ sec. **Price \$175.**



Type 53/54R Plug-In Unit—a transistor testing unit for Tektronix Oscilloscopes with the Plug-In Feature. Supplies a fast-rising pulse and the required supply and bias voltages for measurement of transistor rise, fall, delay, and storage times. 400-ma collector supply, 100-ma bias supply, 5 μ sec-risetime pulse. **Price \$300.**

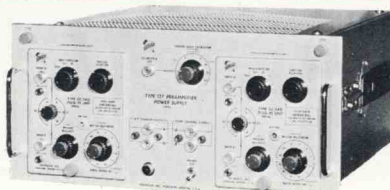


Type 127 Preamplifier Power Supply—a rack-mounting unit that supplies proper operating power to one or a combination of two Type 53/54 Plug-In Preamplifiers. Contains a differential dc-coupled amplifier stage with push-pull output. Risetime is 0.018 μ sec. Square-wave amplitude calibrator has 18 steps from 0.2 mv to 100 v. Dimensions — 8 $\frac{3}{4}$ " high, 19" wide, 20" rack depth. **Price \$525.**

Calibrated Deflection Factor	Input Capacitance	Price
0.05 v/cm to 20 v/cm	47 μ f	\$85
5 mv/cm to 0.05 v/cm	47 μ f	\$125
0.05 v/cm to 20 v/cm		
0.05 v/cm to 20 v/cm	20 μ f	\$250
1 mv/cm to 50 v/cm	47 μ f	\$145
50 μ v/cm to 10 mv/cm	50 μ f	\$165
0.05 v/cm to 20 v/cm	47 μ f	\$175
0.005 v/cm to 20 v/cm	47 μ f	\$175
0.05 v/cm to 20 v/cm	20 μ f	\$125
5 mv/cm to 2 v/cm	20 μ f	\$185
0.05 v/cm to 20 v/cm		

RACK-MOUNTING OSCILLOSCOPES

with the Tektronix Plug-In Features

Types RM31, RM32, RM33, RM35, RM41, RM43, RM45 Oscilloscopes are mechanically rearranged Types 531, 532, 533, 535, 541, 543, 545 Oscilloscopes for mounting in a standard 19-inch rack. The chassis is attached to the cabinet on slide-out tracks. It can be pulled forward, tilted, and locked in any of seven positions for servicing convenience. Dimensions — 14" high, 19" wide, 22 1/2" rack depth.

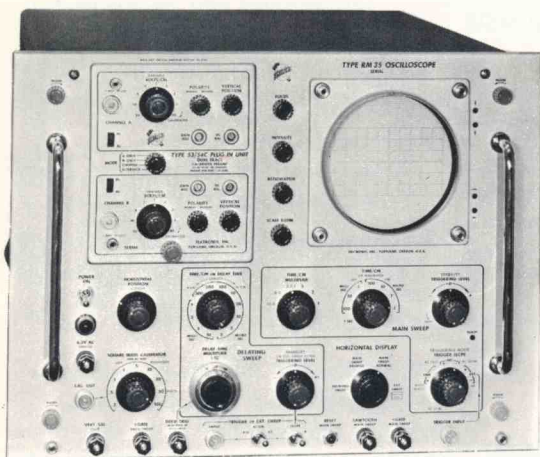

TYPE RM31 OSCILLOSCOPE

Electrically identical to the Tektronix Type 531
Price, without plug-in units \$1095

TYPE RM32 OSCILLOSCOPE


Electrically identical to the Tektronix Type 532
Price, without plug-in units \$925

TYPE RM33 OSCILLOSCOPE

Electrically identical to the Tektronix Type 533
Price, without plug-in units.....\$1150

TYPE RM35 OSCILLOSCOPE

Electrically identical to the Tektronix Type 535
Price, without plug-in units \$1400

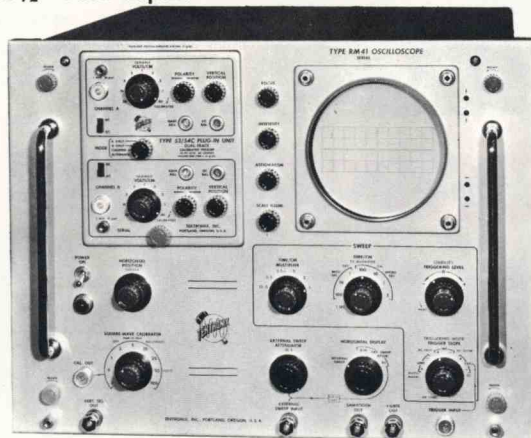

TYPE RM41 OSCILLOSCOPE

Electrically identical to the Tektronix Type 541
Price, without plug-in units \$1245


TYPE RM43 OSCILLOSCOPE

Electrically identical to the Tektronix Type 543
Price, without plug-in units.....\$1300

TYPE RM45 OSCILLOSCOPE

Electrically identical to the Tektronix Type 545
Price, without plug-in units \$1550


OTHER RACK-MOUNTING MODELS

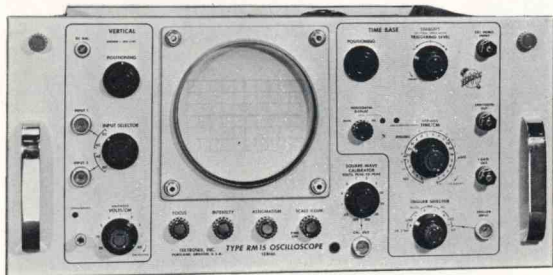

TYPE RM15 RACK-MOUNTING OSCILLOSCOPE

A mechanical rearrangement of the Type 515A for rack-mounting. The electrical characteristics of the Type RM15 are the same as the Type 515A.
Slide-out Mounting.

Dimensions—8 3/4" high, 19" wide, 22 1/2" rack depth.
Price \$825.

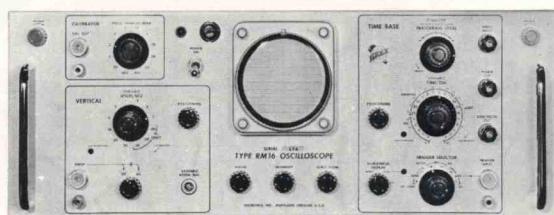

TYPE RM16 RACK-MOUNTING OSCILLOSCOPE

A mechanical rearrangement of the Type 316 for rack-mounting. The electrical characteristics of the Type RM16 are the same as Type 316. Slide-out mounting.
Dimensions—7" h, 19" w, 17 5/8" d. Price \$795.

Type RS16—a two-unit model of the Type RM16 for racks of limited depth. Dimensions, Indicator—7" h, 19" w, 11 3/8" d; Power supply—7" h, 19" w, 5 1/2" d. 60" power cable. Fixed mounting. Price \$850.

CATHODE-RAY OSCILLOSCOPES

TYPE 502 DUAL-BEAM OSCILLOSCOPE

High Sensitivity

200 $\mu\text{v}/\text{cm}$, dc coupled, both beams.

Differential Input

Both amplifiers, at all sensitivities.

Curve Tracing With Two Beams

(Horizontal sensitivity to 0.1 v/cm .)

Single-Beam Curve Tracing—200 $\mu\text{v}/\text{cm}$, both axes.

Frequency Response

Both amplifiers—dc to 100 kc at 200 $\mu\text{v}/\text{cm}$, increasing to 350 kc at 1 mv/cm and to 500 kc at 50 mv/cm .

Wide Sweep Range

21 direct-reading calibrated sweep rates from 1 $\mu\text{sec}/\text{cm}$ to 5 sec/cm .

Accurate Sweep Magnifier—2, 5, 10, and 20 times.

Automatic Triggering

Amplitude Calibrator—6 steps, 1 mv to 100 v.

Electronically-Regulated Power Supplies

Input stages of both amplifiers have transistor-regulated parallel heater supplies.

Price \$795

New



TYPE 517A OSCILLOSCOPE

Excellent Transient Response

Vertical-amplifier risetime—7 millimicroseconds.

Deflection factor—0.05 v/cm .

Signal-displacement error—less than 2% of 2 cm.

Fast Triggered Sweeps

Eleven calibrated rates from 0.01 $\mu\text{sec}/\text{cm}$ to 20 $\mu\text{sec}/\text{cm}$.

Sweep-displacement error—less than 2% of 8 cm.

High Writing Rate

1100 $\text{cm}/\mu\text{sec}$. 24-kv accelerating potential on Tektronix metallized crt.

Pulse-Type Amplitude Calibrator

Trigger-Rate Generator


Automatic Duty-cycle Limiter

Cathode-Follower Input Probe

Electronically-Regulated Power Supplies

Highly Mobile—Indicator unit and power supply mounted on Scope-Mobile.

Price \$3500

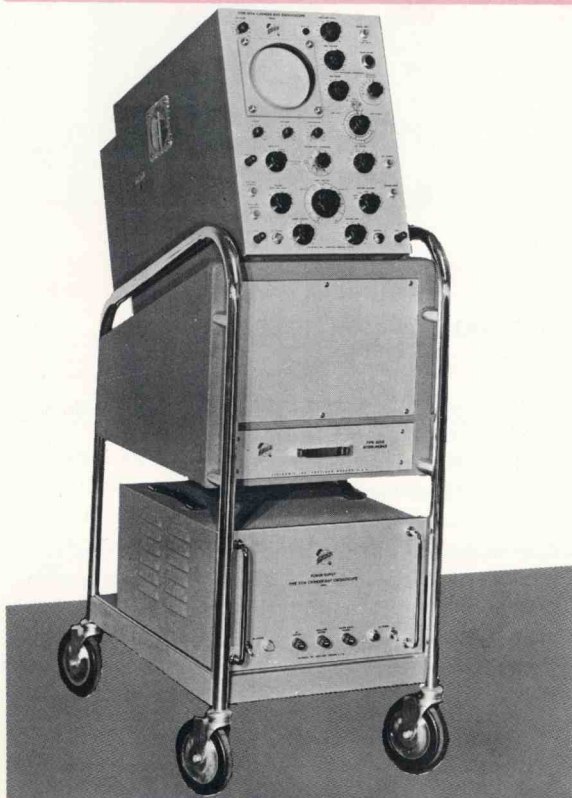

CATHODE-RAY OSCILLOSCOPES

TYPE 310 PORTABLE OSCILLOSCOPE

Vertical Response—DC to 4 mc, 0.1 v/div to 50 v/div in 9 calibrated steps. 3 additional steps from 0.01 v/div to 0.1 v/div, at 2 cycles to 3.5 mc. Continuously variable from 0.01 v/div to 150 v/div.

Risetime—0.09 μ sec.

Sweep Range—0.1 μ sec/div to 0.6 sec/div, with 5x magnifier.

Versatile Triggering—Internal, external, line....ac or dc-coupled, and automatic triggering.

Price \$595.



New TYPE 317 PORTABLE OSCILLOSCOPE

10-KV Accelerating Potential—Bright trace at low sweep repetition rates.

Vertical Response—DC to 10 mc, 0.1 v/div to 50 v/div in 9 calibrated steps. 3 additional steps from 0.01 v/div to 0.1 v/div, at 2 cycles to 10 mc. Continuously variable from 0.01 v/div to 125 v/div.

Risetime—0.035 μ sec.

Sweep Range—0.2 μ sec/div to 6 sec/div, with 22 calibrated steps. Accurate 5x magnifier.

Triggering—Amplitude-level selection with preset or manual stability control, and automatic triggering.

Price \$800. Available Fourth Quarter 1958.

Type 316 Portable Oscilloscope

1.85-KV Accelerating Potential. Identical to Type 317 in all other specifications.

Price \$725



TYPE 515A PORTABLE OSCILLOSCOPE

Passband—DC to 15 mc.

Sensitivity—0.05 v/cm to 20 v/cm in 9 calibrated steps—continuously variable from 0.05 v/cm to 50 v/cm.

Risetime—0.023 μ sec.

Sweep Range—0.2 μ sec/cm to 6 sec/cm with 22 calibrated steps. Accurate 5x magnifier.

Balanced 0.25 μ sec Delay Network.

Triggering—Amplitude-level selection with preset or manual stability control, and automatic triggering.

Price \$750.



TYPE 524AD TELEVISION OSCILLOSCOPE

Passband

Normal—dc to 10 mc from 0.15 v/cm to 50 v/cm, 2 cycles to 10 mc from 15 mv/cm to 50 v/cm.

Flat—Within 1% from 60 cycles to 5 mc.

IRE—Meets IRE standards for level measurements.

Risetime—0.035 μ sec.

Sweep Range—Continuously variable, 0.1 μ sec/cm to 0.01 sec/cm.

Time Markers—0.05 μ sec, 0.1 μ sec, 1.0 μ sec, 200, and 40 pips per television line.

Sweep Delay—0 to 25 milliseconds, continuously variable.

DC-Coupled Unblanking.

3x and 10x Magnifier.

Variable-Duty-Cycle Amplitude Calibrator.

Price \$1180.



CHARACTERISTIC-CURVE TRACERS

TYPE 575 TRANSISTOR CHARACTERISTIC-CURVE TRACER

10 Ampere collector supply.

2.4 Ampere base supply.

Positive or negative collector sweep—

Collector supply—0 to 20 v, 10 amperes.

0 to 200 v, 1 ampere.

Positive or negative base stepping

4 to 12 steps/family, repetitive or single family display.

17 current/step positions, 0.001 ma/step to 200 ma/step.

5 voltage/step positions, with 24 different driving resistances.

Calibrated display

Vertical Axis—

Collector current

Base voltage

Base current

Base source voltage

Horizontal Axis—

Collector voltage

Base voltage

Base current



Base source voltage

Collector current range is in 16 steps from 0.01 to 1000 ma/div.

Base voltage range is from 0.01 v/div to 0.5 v/div in 6 steps.

Collector voltage range is from 0.1 v/div to 20 v/div in 11 steps.

Price \$925.

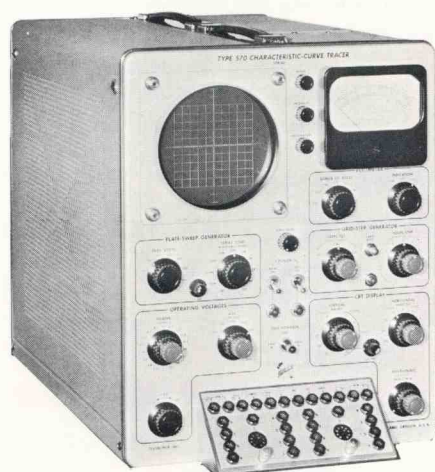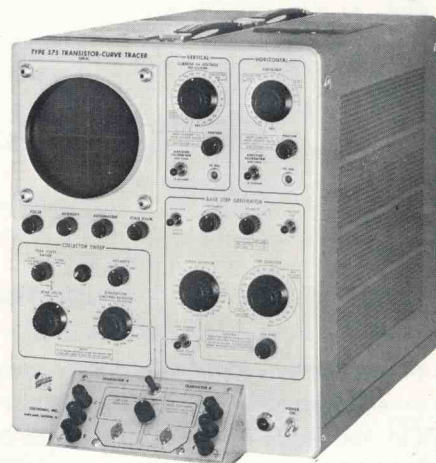

TYPE 570 ELECTRON-TUBE CHARACTERISTIC-CURVE TRACER

Displays 4 to 12 characteristic curves per family.

Plots all important characteristics—

Plate current against plate or grid voltage.

Screen current against plate or grid voltage.

Grid current against plate or grid voltage.

Plots up to 8 positive-bias curves per family.

Calibrated Controls—

Accurate current and voltage readings directly from the crt screen.

Wide Display Range—

11 current ranges from 0.02 ma/div to 50 ma/div.

9 voltage ranges from 0.1 v/div to 50 v/div.

11 series-load resistors from 300 ohms to 1 megohm.

7 grid-step values from 0.1 v/step to 10 v/step.

Heater voltages available in 17 steps, variable to 20%.

Price \$925.

TYPE 525 TELEVISION WAVEFORM MONITOR

Frequency Response

Flat—within 1% between 60 cycles and 5 mc.

Low Pass—passes stair steps, eliminates high frequencies.

High Pass—passes high frequencies, eliminates stair steps.

IRE—meets IRE standards for level measurements.

Sensitivity—Deflection factor of the vertical amplifier is 0.015 v/cm.


Vertical Attenuator—1x, 2x, and 5x.

Keyed Clamp-Type DC Restorer.

Gain Stability within 1%.

Rack-Mounting—8³/₄" high, 19" wide, 20³/₄" rack depth.

Price \$1050.

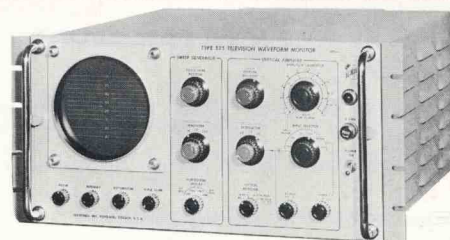

TYPE 525MOD111—Equipped with intensifier for observation of vertical-blanking-interval test signal.

Price \$1095.

AUXILIARY INSTRUMENTS



TYPE 105 SQUARE-WAVE GENERATOR

Risetime—13 millimicroseconds, with 52-ohm termination.

Frequency Range—25 cycles to 1 mc, continuously variable.

Frequency Meter—Direct reading, accurate within 3% of full scale.

Output Amplitude—0 to 100 v maximum, 0 to 15 v across 93 ohm load.

Price \$395.

TYPE 112 DC-COUPLED DIFFERENTIAL AMPLIFIER

Voltage Gain—0.5 to 5000, continuously variable.


Frequency Response—DC to 2 mc for gain of 166 or less.

DC to 1 mc for gain of 166 to 5000.

High Rejection Ratio

Voltage Calibrator—5 mv to 50 v full scale, continuously variable.

Price \$495.



TYPE 121 WIDE-BAND PREAMPLIFIER

Voltage Gain—0.01 to 100, continuously variable.

Frequency Response—5 cycles to 12 mc.

Risetime—less than 0.03 μ sec.

Maximum Output Voltage—1 v peak to peak in terminated 93-ohm cable.

Price \$265.



TYPE 122 LOW-LEVEL PREAMPLIFIER

Voltage Gain—1000.

Frequency Response—0.16 cycles to 40 kc maximum.

Rejection Ratio—80 to 100 db for in-phase signals.

Noise Level—4 μ v rms maximum.

Output Voltage—20 v maximum (peak to peak).

Input Impedance—10 megohms paralleled by approximately 50 μ f.

Battery operated for minimum noise level.

Price, without batteries, \$85.



TYPE 123 PREAMPLIFIER

Frequency Response—

Within 2% from 15 cycles to 6 kc.

Within 3 db from 3 cycles to 25 kc.

Voltage Gain—100 times.

Hum-Free—Powered by miniature batteries.

Compact—3 $\frac{5}{8}$ " high, 1 $\frac{1}{2}$ " wide, 2 $\frac{1}{4}$ " deep.

Weight—10 ounces.

Price \$50.



TYPE 107 SQUARE-WAVE GENERATOR

Risetime—3 millimicroseconds, with 52-ohm termination.

Frequency Range—400 kc to 1 mc, uncalibrated.

Output Amplitude—0.1 v to 0.5 v, with 52-ohm termination.

Price \$165.



TYPE 130 L,C METER

Guard Voltage—Permits measuring an unknown capacitance while eliminating the effects of other capacitances from the measurements.


Five Ranges—

Microhenries—0 to 3, 10, 30, 100, 300.


Micromicrofarads—0 to 3, 10, 30, 100, 300.

Accuracy—Within 3% of full scale.

Price \$195.



AUXILIARY INSTRUMENTS

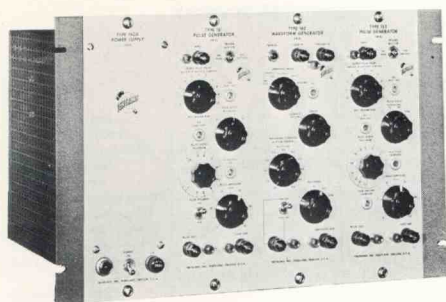

TYPE 160A POWER SUPPLY

Large load capacity—Provides operating power for four to six 161, 162, 163 Units plus a 360 Indicator Unit.

Electronic voltage regulation.
Price \$140.

TYPE 163 FAST-RISE PULSE GENERATOR

Variable-amplitude positive pulse, 0 to 25 v.

Fixed-amplitude positive gate, 25 v.

Output Characteristics—

Risetime—less than 0.2 μ sec.

Duration—Calibrated, continuously variable, 1 μ sec to 10,000 μ sec.

Delay—Continuously variable to 100% of triggering sawtooth duration.

Price \$95.

TYPE 161 PULSE GENERATOR

Variable-amplitude positive or negative pulse from 0 to 50 v.
Positive Gate—50 v amplitude.

Output Characteristics

Duration—calibrated, continuously variable, 10 μ sec to 0.1 sec.

Delay—continuously variable, 0 to 100% of triggering sawtooth waveform.

Risetime—less than 0.5 μ sec.

Price \$95.

TYPE 162 WAVEFORM GENERATOR

Output Waveforms — positive pulse, positive gate, and negative-going sawtooth.

Output Characteristics—

Repetition Rate—0.1 c to 10 kc for recurrent operation.

Duration — pulse 10 μ sec to 0.05 sec; gate and sawtooth, 100 μ sec to 10 sec.

Amplitude — pulse and gate, 50 v; sawtooth, +150 v to +20 v.
Price \$95.

TYPE 360 INDICATOR

Vertical Passband—DC to 500 kc.

Calibrated vertical attenuator

Deflection factor—0.05 v/div.

Waveform Requirements—for Horizontal Deflection—50 v positive unblanking pulse, and a sawtooth of either polarity with amplitude from 110 to 150 v and extreme voltage limits at -90 v and +170 v.

Powered by a Type 160A, or Type 126 Power Supply.

Price \$195.



TYPE 126 POWER SUPPLY

Provides operating power for one Type 161, 162, 163, or 360.

Electronic voltage regulation.

Price \$100.

New



TYPE 181 TIME-MARK GENERATOR

Time-marks—1, 10, 100, 1000, and 10,000 microseconds, plus 10-mc sine wave.

1-mc crystal controlled oscillator is accurate within 0.03%.

Price \$225.



TYPE 180A TIME-MARK GENERATOR

Time-Marks—1, 5, 10, 50, 100, 500 μ sec; 1, 5, 10, 50, 100, 500 msec; 1, 5 seconds.

Three Sine-Wave Frequencies—5 mc, 10 mc, and 50 mc.

Six Trigger-Rate Frequencies—1, 10, 100, cycles and 1, 10, 100 kc.

Temperature-stabilized crystal provides stability of 2 ppm.

Price \$575.



TYPE 190A CONSTANT-AMPLITUDE SIGNAL GENERATOR

Output Frequency—350 kc to 50 mc, continuously variable, 50 kc reference signal.

Output Amplitude—40 mv to 10 v peak to peak, continuously adjustable.

Amplitude Variation—less than $\pm 2\%$ from 50 kc to 30 mc; less than $\pm 5\%$ from 30 mc to 50 mc.

Harmonic Content—typically less than 5%.

Price \$275.

Tektronix, Inc., P. O. Box 831, Portland 7, Oregon

Telephone: CYPRESS 2-2611

TWX—PD 311

Cable: TEKTRONIX

AN OREGON CORPORATION

Tektronix Field Engineering Offices

ALBUQUERQUE*	Tektronix, Inc., 127C Jefferson St. N. E., Albuquerque, New Mexico...	TWX—AQ 96	Alpine 6-1279
BALTIMORE*	Tektronix, Inc., 724 York Road, Towson 4, Maryland...	TWX—TOWSON MD 535	Valley 5-9000
		Washington Area: ENterprise 1-6023	
BOSTON*	Tektronix, Inc., 18 Austin St., Newtonville 60, Massachusetts...	TWX—NEWTON MASS 940	Lasell 7-2212
BUFFALO	Tektronix, Inc., 961 Maryvale Drive, Buffalo 25, New York...	TWX—WMSV 2	Spring 7861
CHICAGO*	Tektronix, Inc., 7514 W. North Ave., Elmwood Park 35, Illinois...	TWX—RIVER GROVE ILL 1395	Gladstone 6-7930
CLEVELAND	Tektronix, Inc., 3353 Edgecliff Terrace, Cleveland 11, Ohio...	TWX—CV 352	Clearwater 2-2121
		Pittsburgh Area: ZEnith 0212	
DALLAS*	Tektronix, Inc., 6211 Denton Drive, P. O. Box 35104, Dallas 35, Texas...	TWX—DL 264	Fleetwood 2-4087
DAYTON	Tektronix, Inc., 3601 South Dixie Drive, Dayton 39, Ohio...	TWX—DY 363	AXminster 3-4175
DETROIT*	Tektronix, Inc., 27310 Southfield Road, Lathrup Village, Michigan...	TWX—SOUTHFIELD MICHIGAN 938	
		Elgin 7-0040	
ENDICOTT*	Tektronix, Inc., 3214 Watson Blvd., Endwell, New York...	TWX—ENDICOTT NY 290	ENDicott 8-5291
HOUSTON	Tektronix, Inc., 2605 Westgrove Lane, Houston 27, Texas...		MOhawk 7-8301, 7-8302
KANSAS CITY	Tektronix, Inc., 5920 Nall, Mission, Kansas...		RANDolph 2-6522/3
		St. Louis Area: ENterprise 6510	

LOS ANGELES AREA

East L. A.*	Tektronix, Inc., 5441 East Beverly Blvd., East Los Angeles 22, California...	TWX—MTB 7762	Raymond 3-9408
West L. A.*	Tektronix, Inc., 11681 San Vicente Blvd., West Los Angeles 49, California...		BRadshaw 2-1563
		TWX—WEST LOS ANGELES CAL 6698	GRanite 3-1105
MINNEAPOLIS	Tektronix, Inc., 3100 W. Lake Street, Minneapolis 16, Minnesota...	TWX—MP 983	WAlnut 7-9559

NEW YORK CITY AREA***

New York City and Long Island served by:			
	Tektronix, Inc., 840 Willis Avenue, Albertson 1, New York...	TWX—G CY NY 1416	Pioneer 7-4830
Westchester County, Hudson River Valley served by:			
	Tektronix, Inc., 49 Pondfield Road, Bronxville 8, New York...	TWX—BRONXVILLE NY 1207	DBeerfield 7-3771
Northern New Jersey served by:			
	Tektronix, Inc., 412 Chestnut Street, Union, New Jersey...	TWX—UNVL 82	MURdock 8-2222
PALO ALTO*	Tektronix, Inc., 701 Welch Road, Palo Alto, California...	TWX—PALO ALTO CAL 112	DAvenport 6-8500
PHILADELPHIA	Tektronix, Inc., 7709 Ogontz Ave., Philadelphia 50, Pennsylvania...	TWX—PH 930	WAvery 4-5678
PHOENIX	Tektronix, Inc., 2415 E. McDowell Road, Phoenix, Arizona...	TWX—PX 52	BRidge 5-9762
SAN DIEGO	Tektronix, Inc., 1900 Rosecrans Street, San Diego 6, California...	TWX—SD 6341	ACademy 2-0384
SYRACUSE*	Tektronix, Inc., 313 Nottingham Road, Syracuse 10, New York...	TWX—SY 423	GRanite 2-3339
TORONTO*	Tektronix, Inc., 3 Finch Ave., East, Willowdale, Ontario, Canada...		Toronto, BALdwin 5-1138

* REPAIR CENTERS

Tektronix Engineering Representatives

ATLANTA	Bivins & Caldwell, 3133 Maple Drive, N. E., Atlanta 5, Georgia...	TWX—AT 987	CEdar 3-7522
DENVER	Hytronic Measurements, Inc., 1295 South Bannock Street, Denver 23, Colorado...	TWX—DN 863	PEARl 3-3701
FORT MYERS	Arthur Lynch & Associates, Inc., 35 W. Northshore Ave., Fort Myers, Florida...	TWX—FORT MYERS FLA 458	WYandotte 5-2151
GAINESVILLE	Arthur Lynch & Associates, Inc., P. O. Box 2492, Gainesville, Florida...		FRanklin 2-8028
HIGH POINT	Bivins & Caldwell, P. O. Box 5187, High Point, North Carolina...	TWX—HIGH POINT NC 454	Phone: 2-6873
HUNTSVILLE	Bivins & Caldwell (Direct Telephone Line)		JEfferson 2-5733
PORTLAND	Hawthorne Electronics, 700 S. E. Hawthorne Blvd., Portland 14, Oregon...		BElmont 4-9375
SEATTLE	Hawthorne Electronics, 101 Administration Bldg., Boeing Field, Seattle, Washington...	TWX—SE 798	PArkway 5-3962

Tektronix Overseas Representatives

ARGENTINA	Ricma Argentina S. A., Sarmiento 309-Tercer Piso, Casilla Correo 2824, Buenos Aires, Argentina	Gerencia: 31-3990
AUSTRALIA	Electronic Industries Imports Pty. Ltd., 90 Grote St., Adelaide, S.A., Australia	LA-5295
	Electronic Industries Imports Pty. Ltd., 52 Bowen St., Brisbane, Qld., Australia	B-6462
	Electronic Industries Imports Pty. Ltd., 139-143 Bouverie St., Carlton, N. 3, Melbourne, Australia	FJ-4161/8
	Electronic Industries Imports Pty. Ltd., 68 Railway Pde., West Perth, W.A., Perth, Australia	BA-8587/9686
	Electronic Industries Imports Pty. Ltd., 713 Paramatta Rd., Leichhardt, NSW, Sydney, Australia	LM-6327
BELGIUM	Regulation-Mesure, S.P.R.L. 22, rue Saint-Hubert, Bruxelles, Belgium	70. 79. 89
BRAZIL	Consulting & Suppliers Company for South America Inc., 61 Broadway, New York 6, New York	BOwling Green 9-0610
	Importacao Industria E Comercio Ambriex S. A., Av. Graca Aranha 57-510 Rio De Janeiro, Brazil	42-7990, 42-7291
	Palmar Ltda., Rua 7 de Abril 252, Sao Paulo, Brazil	34-4497
CUBA	Laboratorios Meditron, Calle B No. 56, Vedadd, Habana, Cuba	F-5970
DENMARK	Tage Olsen A/S, Centrumsgaarden, Room 133, 6D, Vesterbrogade, Kobenhavn V, Denmark	Palae 1369, Palae 1343
ENGLAND	Livingston Laboratories Ltd., Retcar Street, London N.19, England	Archway 6251
FINLAND	Into O/Y, 11 Meritullinkatu, Helsinki, Finland	62 14 25, 35 125
FRANCE	Maurice I. Parisier & Co., 741-745 Washington St., New York 14, N. Y.	ALgonquin 5-8900
	Relations Techniques Intercontinentales, 145, Avenue Malakoff, Paris 16, France	Passy 08-36, Kleber 54-82
INDIA	Electronic Enterprises, 46, Karani Building, Opp. Cama Baug, New Charni Road, Bombay 4, India	75376
ISRAEL	Landseas Products Corp., 48 West 48th Street, New York 36, New York	COLUMbus 5-8323
	Landseas Eastern Co., P. O. Box 2554, Tel Aviv, Israel	66890
ITALY	CESA-Elettronica, 20 via Tevere, Roma, Italy	846.592, 865.722
JAPAN	Midoriya Electric Co., Ltd., 3-4 Chome, Ginza-nishi, Chuo-Ku, Tokyo, Japan	(56) 1786 7415 7416 7439 5396
NETHERLANDS	C. N. Rood, n.v., 11-13 Cort van der Lindenstraat, Rijswijk, Z.H., Netherlands	The Hague 98.51.53
NORWAY	Eugen Nilsson, Møllergaten 8, Oslo, Norway	33 14 28, 33 27 62
SWEDEN	Erik Ferner AB, Björnsonsgatan 197, Bromma, Stockholm, Sweden	37 42 77, 37 77 00
SWITZERLAND	Omni Ray AG, Dufourstrasse 56, Zurich 8, Switzerland	(051) 34-44-30
UNION OF SOUTH AFRICA	Protea Holdings, Ltd., 42, Faraday Street, Wemmer, Johannesburg, Union of South Africa	33-4762/3
URUGUAY	Compania Uruguaya De Rayos X y Electromedicina S. A. Mercedes 1300, Yaguaron 1449, Montevideo, Uruguay	8 58 29
WEST GERMANY	Rohde & Schwarz Vertriebs, GmbH, Berlin W30, Augsburgstrasse 33, West Germany	91 27 62
	Rohde & Schwarz Vertriebs, GmbH, Hannover, Schillerstrasse 23, West Germany	1 33 80
	Rohde & Schwarz Vertriebs, GmbH, Karlsruhe, Kriegstrasse 39, West Germany	25202
	Rohde & Schwarz Vertriebs, GmbH, Köln, Habsburger-Ring 2-12, West Germany	215341
	Rohde & Schwarz Vertriebs, GmbH, München 9, Auerfeldstrasse 22, West Germany	4 46 38
	Rohde & Schwarz Vertriebs, GmbH, München 9, Briennnerstrasse 23, West Germany	59 52 65

Other OVERSEAS areas please write or cable directly to the Export Department, Portland, Oregon, U.S.A.