

NOTES

Purpose

John Mulvey, 1-30-67

For checking sine-wave response of scopes and amplifiers in the region between 65 MHz and 500 MHz. Originally designed for 10A2A and 647A.

Preliminary Description

John Mulvey, 1-30-67

This Cal Fixture is pictured in the first manuals for the 10A2A and the 647A. It is a constant amplitude sine-wave generator similar to the Type 190 and 191. The oscillator is basically a 65-500 MHz General Radio 1208-C, but there is also a 3 MHz oscillator for a "low" frequency amplitude reference signal.

A ten-position switch attenuates the output signal from approximately 5 volts peak-to-peak to 0.5 volts peak-to-peak in 0.5-volt steps for signals up through 300 MHz. The same switch provides up to 2.5 volts for signal frequencies between 300 and 500 MHz, and attenuates them in 0.5-volt steps. A variable amplitude control covers amplitudes between steps.

Output amplitude constancy is within $\pm 1\%$ of the 3 MHz reference signal amplitude for frequencies between 65 and 300 MHz. Constancy is within $\pm 3\%$ of the reference signal amplitude from 300 to 500 MHz.

Harmonic content is at least 34 dB down.

067-0532-00 CALIBRATION FIXTURE

Constant Amplitude Signal Generator



MANUFACTURERS OF CATHODE-RAY OSCILLOSCOPES

Copyright © 1967 by Tektronix, Inc.,
Beaverton, Oregon. Printed in the United
States of America. All rights reserved. Con-
tents of this publication may not be repro-
duced in any form without permission of the
copyright owner.

067-0532-00 CALIBRATION FIXTURE

Constant Amplitude Signal Generator



The Tektronix Type 067-0532-00 Constant Amplitude Signal Generator produces sinewaves whose amplitude remains constant as the frequency is varied. Output frequency is continuously variable from 65 to 500 MHz. The amplitude of the above mentioned sinewaves is referenced to the amplitude of a 3 MHz sinewave also available at the output connector. Output amplitude is continuously variable from 0.5 volt to 2.5 volts peak to peak into 50 ohms. The output amplitude is in 0.5 volt steps from 0.5 to 5.0 volts into 50 Ω . It is also continuously variable from 0.5 volts to 5.5 volts. The output remains constant amplitude from 0.5 volts to 5.5 volts from 65 MHz to 300 MHz, and constant amplitude from 0.5 volts to 2.5 volts from 300 MHz to 500 MHz. Cable loss and standing wave errors are essentially eliminated. The amplitude is regulated at the generator end of a 50 ohm resistor physically adjacent to the output connector. The output connector, 50 ohm resistor, and amplitude detector are at the end of an attached 42 inch cable.

CHARACTERISTICS

OUTPUT

| CHARACTERISTIC | PERFORMANCE REQUIREMENT | SUPPLEMENTAL INFORMATION |
|----------------------|---|----------------------------|
| FREQUENCY ACCURACY | Within $\pm 2\%$ of reading | Into a 50Ω 1% load |
| AMPLITUDE ACCURACY | With $\pm 3\%$ of indicated amplitude | Into a 50Ω 1% load |
| AMPLITUDE REGULATION | Within $\pm 2\%$ of 3 MHz amplitude from 65 to 300 MHz and 0.5 to 5.5 volts P-P output. Within $\pm 5\%$ of 3 MHz amplitude from 300 to 500 MHz and 0.5 to 2.5 volts P-P output. | Into a 50Ω 1% load |
| HARMONIC CONTENT | | Typically less than 2% |

POWER REQUIREMENTS

| CHARACTERISTIC | PERFORMANCE REQUIREMENT | SUPPLEMENTAL INFORMATION |
|-------------------|--|---|
| LINE VOLTAGES | 105 VAC, 115 VAC, 125 VAC 210 VAC, 230 VAC, 250 VAC | Center values available by rear panel switch and transformer wiring |
| FUSES | Type 3AG 0.4 amperes slo blo Type 3AG 0.2 amperes slo blo | 115 VAC operation 230 VAC operation |
| LINE FREQUENCY | 50 to 400 Hz | |
| POWER CONSUMPTION | | Approximately 25 watts |

MECHANICAL

| CHARACTERISTIC | INFORMATION |
|----------------|---|
| CONSTRUCTION | Aluminum alloy chassis, panel and cabinet Glass laminated circuit boards Output through a GR Type 874 connector at the end of a 42 inch cable |

MECHANICAL (cont)

| CHARACTERISTIC | INFORMATION |
|----------------|--|
| FINISH | Anodized panel, blue vinyl coated cabinet Painted dial and dial cover |
| DIMENSIONS | Approximately 15 1/2 (L) x 7 1/4 (H) x 7 7/8 inches (W) |
| WEIGHT | Approximately 13 pounds |

ENVIRONMENTAL

| CHARACTERISTIC | PERFORMANCE REQUIREMENT |
|----------------|--|
| TEMPERATURE | The above performance requirements apply over an ambient temperature range of 0° to +50°C |
| WARM UP TIME | Five minutes at 25°C ±5°C |

OPERATING INSTRUCTIONSFUNCTION OF FRONT PANEL CONTROLS AND CONNECTORS**AMPLITUDE**

Switch that selects the peak to peak voltage of the output sinewave. Output amplitude into a 50Ω , 1% load may be read from the front panel when the VARIABLE control is set to CAL.

Output amplitude into an open circuit is approximately twice that of the indicated amplitude when the VARIABLE control is set to CAL.

VARIABLE

Control that allows a continuous increase of the output amplitude so that the ranges indicated on the front panel overlay. When the VARIABLE is set to CAL, the peak to peak output amplitude into 50Ω is determined by the setting of the AMPLITUDE switch.

FREQUENCY RANGE

Selects the frequency of the output sinewave.

3 MHz Position Output is a 3MHz sinewave to be used as the reference frequency.

65-500 MHz Position Output is a sinewave whose frequency is determined by the FREQUENCY dial setting.

FREQUENCY

Dial that indicates the frequency of the output sinewave from 65 to 500 MHz when the FREQUENCY RANGE switch is set to 65-500 MHz position.

OUTPUT

A GR Type 874 connector at the end of a 42 inch cable that provides a means for connecting the constant amplitude generator output to the desired external equipment.

POWER

Switch Connects the proper AC line voltage to the 067-0532-00 power supply when positioned to ON.


Light Indicates that an AC line voltage is present at the inter-connecting plug and power is being delivered to the 067-0532-00.

REAR PANEL

115-230 SWITCH Selects the proper wiring so that the 067-0532-00 may be connected to the 115 or 230 VAC line.

OPERATION

STEADY STATE EQUIVALENT CIRCUIT

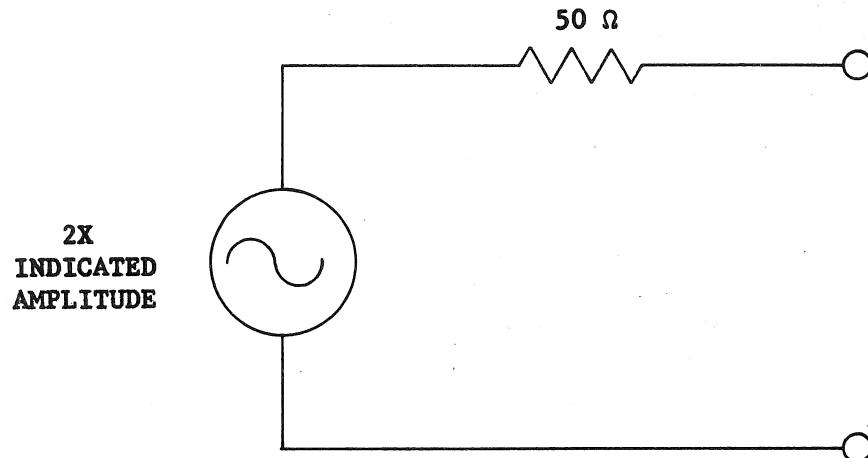

The Type 067-0532-00 closely approximates the above equivalent circuit.

To operate the Type 067-0532-00 Calibration Fixture, connect the power cord to the interconnecting plug on the rear panel.

CAUTION

A rear panel switch selects the connection of the primary of the power supply transformer. This switch must be in the proper position in respect with the available line voltage. This instrument is factory wired for 115 or 230 VAC operation unless otherwise requested. The transformer may be wired for 105 or 210 VAC operation or 125 or 250 VAC operation as required by the value of the available line voltage.

Turn POWER switch to ON and allow the unit about five minutes to warm up and stabilize.

Select the desired output amplitude using the AMPLITUDE switch and the VARIABLE control if so desired.

TYPE 067-0532-00

Select the desired frequency by setting the FREQUENCY RANGE to 3 MHz (fixed reference) or 65-500 MHz. Set the output frequency by adjusting the FREQUENCY dial as desired.


Connect the Type 067-0532-00 to the desired equipment.

It is recommended that General Radio Type 874-G attenuators or equivalent be used where necessary. Connection to high impedance BNC inputs should be made through a Tektronix Part No. 017-0083-00, GR to BNC 50 Ω termination. When small BNC attenuators are used, errors, as great as 1% at 150 MHz to 10% at 500 MHz may result.

It is further recommended that cables not be used except where essential.

The following illustrations show how the Type 067-0532-00 may be used to calibrate Tektronix instruments. For information on the use of the Type 067-0532-00 Constant Amplitude Signal Generator on a specific instrument, please refer to the Maintenance and Calibration section in the instruction manual of the instrument.

067-0532-00
BLOCK DIAGRAM

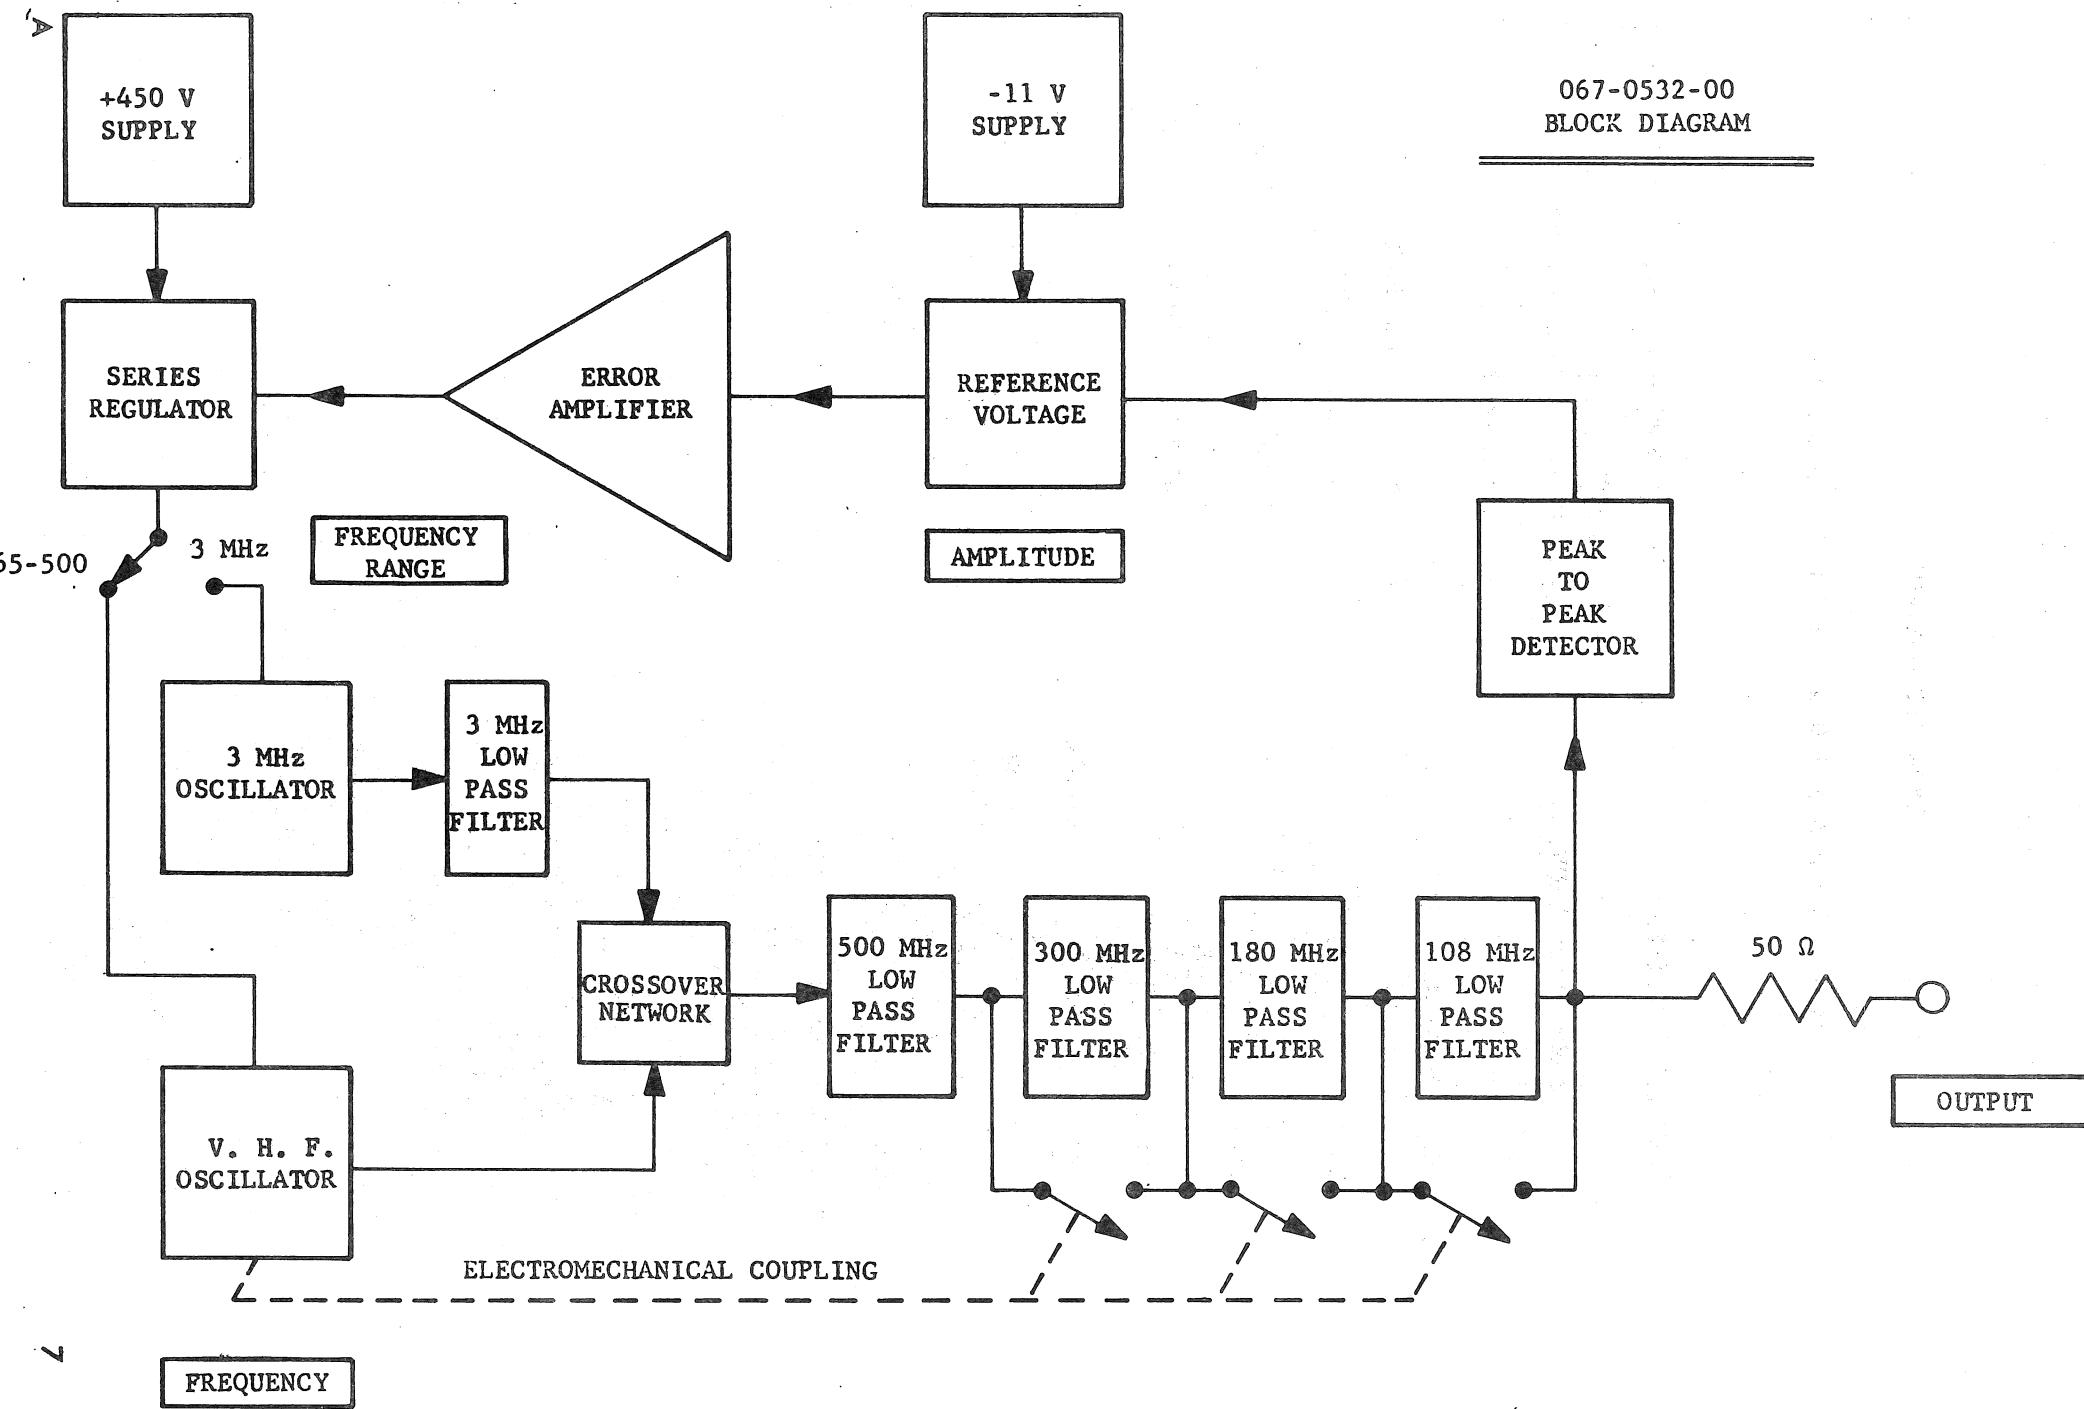

CALIBRATION PROCEDURE

1. EQUIPMENT REQUIRED
 2. PRELIMINARY INSPECTION,
ADJUSTMENT
 3. PRESET CONTROLS
 4. RESISTANCE CHECKS
 5. SETUP
 6. POWER SUPPLIES
 7. AMPLITUDE
 8. 3 MHz FREQUENCY
 9. 65-500 MHz Oscillator Output Coupling
 10. 65-500 MHz Frequency
Accuracy: $\pm 2\%$
 11. AMPLITUDE REGULATION
Regulation
Frequency Regulation
65 MHz - 300 MHz $\pm 2\%$
300 MHz - 500 MHz $\pm 5\%$
- | Supply | Regulation | Ripple |
|--------|-------------|--------|
| -11 V | ± 20 mV | 3 mV |
| +6.8 V | | 10 mV |
- Variable range: 1 volt min
 Amplitude accuracy
 0.5 - 5V $\pm 2.0\%$
- Accuracy: $\pm 5\%$

CALIBRATIONNOTES

1. EQUIPMENT REQUIRED

1. TEKTRONIX TYPE 547 OSCILLOSCOPE
or equivalent
- 1 TEKTRONIX TYPE 1A1 DUAL-TRACE
- 1 TEKTRONIX TYPE 1L20 SPECTRUM
ANALYZER
- 1 TEKTRONIX TYPE 184 TIME MARK
GENERATOR
- 1 067-0502-00 STANDARD AMPLITUDE
CALIBRATOR (SAC)
- 1 20,000 ohm/volt multimeter
- 1 DC Voltage bridge
or other inf. impedance.
 $\pm 0.25\%$ or better meter, 1 V
to 11 V
- 1 50 ohm Precision Termination,
selected from GR 874-W50B $\pm 0.5\%$
- 1 GR to BNC male adapter
- 1 POWER METER (HP Model 431B)
- 1 THERMISTOR MOUNT (HP Model 478A)

2. PRELIMINARY INSPECTION ADJUSTMENT

Check for unsoldered joints, rosin joints, lead dress, and long ends. Check for protruding parts, loose hardware, and foreign material. Check for loose knobs, sufficient clearance of knobs from the front panel and each other, and smooth rotation of the FREQUENCY dial and controls. Correct all defects found.

Adjust switches S201, S202, S203 to actuate at 108, 180, 300 MHz, respectively.

3. PRESET CONTROLS

TYPE 067-0532-00

| | |
|-----------------|---------|
| POWER | off |
| FREQUENCY dial | 100 MHz |
| FREQUENCY RANGE | 3 MHz |
| AMPLITUDE | 0.5 |
| VARIABLE | CAL |

CALIBRATION

NOTES

3. PRESET CONTROLS (cont)

115 V/230 V 115 V
internal adjustments midr

Leave controls for any step as they were
in the preceding step unless otherwise noted.

4. RESISTANCE CHECKS

NOTE

Do not have instrument plugged into a line voltage source.

a. +450 unregulated

Measure the resistance from the
+450 volt supply to chassis
ground. It should read 15 kΩ.
Turn POWER on, resistance should
be \approx 100 kΩ. Turn POWER off.

b. +6.8 volts: \approx 300 ohms

c. -11 volts: \approx 1.5 kΩ with meter
connected for higher reading.

5. SETUP

Plug the TYPE 067-0532-00 into
a variable line voltage source and
turn POWER on. Turn all test equip-
ment on. Set variable line voltage
source to 115 V.

6. POWER SUPPLIES

a. +450 unregulated

Measure the +450 volt supply to
chassis ground using the multi-
meter. Read approximately 435
volts.

CALIBRATIONNOTES

6. POWER SUPPLIES (cont)

- b. Preset -11 volts and check regulation - Regulation: ± 20 mV

Connect DCVB to -11 V supply and adjust R122 for \approx -11 V. Vary line voltage source between 103 and 127 volts. Check for regulation with specified limits.

- c. Check -11 volt and +6.2 volt ripple.

Ripple: -11 V, 3 mV P to P max; +6.8V, 10 mV

Check the -11 volt and +6.8 volt supplies for ripple within specified limits while varying line voltage source from 103 to 127 V.

7. AMPLITUDE

- a. Adjust -11 Volts, Tracking, and Ampl Cal

Since these three adjustments are interacting, the following sequence of steps is to be repeated until all three pots are accurately adjusted.

Accurately calibrate the test scope Channel 1 input to 2 V/cm and Channel 2 input to 0.2 V/cm ($\pm .25\%$) using the SAC.

Place variable control in CAL. Connect 067-0532-00 OUTPUT to test scope using the GR to BNC male adapter. Adjust Ampl Cal for exactly 1 volt peak to peak output (5 cm on 0.2 V/cm scale).

CALIBRATION

NOTES

7. AMPLITUDE (cont)

Connect 067-0532-00 OUTPUT to test scope Channel 1. Switch AMPLITUDE to 5.0. Adjust the -11 volts pot for exactly 10 volts peak to peak output (5 cm on 2 V/cm scale).

Disconnect the external grounding strap from the common terminal of the DCVB to enable it to make floating voltage measurements. Connect common terminal to the switch wiper of the front wafer of the AMPLITUDE control. Connect the other terminal to the wiper on the rear terminal. Adjust TRACKING control for exactly -1 volt.

Repeat steps until satisfactory adjustment is attained.

b. Check Variable

VARIABLE RANGE: 1 volt min

Set AMPLITUDE to 5.0 and set accurately calibrated test scope to 2 V/cm. Rotate the VARIABLE cw to the end of its range and observe an increase in amplitude to 5.5 cm minimum on the test scope. Return VARIABLE to CAL.

c. Check AMPLITUDE $\pm 2\%$

Use the SAC to calibrate the appropriate test scope deflection factor and check each position of the 067-0532-00 AMPLITUDE control. Use the selected $\pm 0.5\%$ GR 874-WSOB 50 Ω terminator.

CALIBRATIONNOTES

8. 3 MHz FREQUENCY

Accuracy: $\pm 5\%$

Connect the output of the TYPE 184 to the other input on the TYPE 1A1. Select 1 μ s marker. Switch TYPE 1A1 MODE to ADD, CHANNEL 1 and CHANNEL 2 V/CM and trigger level as desired to display error frequency as amplitude modulation of a radio frequency envelope.

Adjust T8 for a modulation frequency less than 150 kHz.

NOTE

Installing the covers will shift the frequency upwards approximately 40 kHz. Adjustment should be made accordingly.

9. VHF Oscillator Output Coupling and Grid Current.

Connect the VOM to D88 (300 volt range). Set AMPLITUDE to 5.0; frequency to 300 MHz. Adjust output coupler and R5 for minimum voltage at D88.

10. 65 - 500 MHz FREQUENCY $\pm 2\%$

The dial is matched to the oscillator by individual marking by GERNERAL RADIO CO.

Adjust the dial at 100 MHz using the TYPE 1L20 to compare 100 MHz from the 184. Check the dial at multiples of 100 MHz using the 1L20 and appropriate frequencies from the 184. If necessary, adjust 500 MHz by bending the small plate near the tube in the oscillator.

11. AMPLITUDE REGULATION

a. Setup

Turn off the 067-0532-00 power.
Connect the 067-0532-00 sampling
head --- X5 GR attenuator ---
478A Thermistor Mount --- 431B
Power Meter. Zero the 431B and
return the range switch to +5 dBm.
Set the 067-0532-00 frequency to
65 MHz and amplitude to 5 volts.
Turn the 067-0532-00 power on.

b. Check Amplitude Regulation

$\pm 2\%$ 65 to 300 MHz (0.5 to 5.5V)
 $\pm 5\%$ 300 to 500 MHz (0.5 to 2.5V)

Adjust the 067-0532-00 variable amplitude so the power meter indicates exactly 2.5 on the center scale. Check for no more than $\pm 2\%$ change in amplitude as the frequency is varied from 65 MHz to 300 MHz.


NOTE

The minor division marks that are within + and -3 minor divisions of 2.5 are equal to 1% per minor division.

Change the 067-0532-00 amplitude to 2.5 volts and the frequency to 65 MHz.
Change the 431B RANGE switch to 0 dBm.
Adjust the 067-0532-00 variable amplitude so the 431B indicates 2.5 on the center scale. Check for no more than $\pm 2\%$ change in amplitude as the frequency is varied from 65 MHz to 300 MHz. Check for no more than $\pm 5\%$ change in amplitude as the frequency is varied from 300 MHz to 500 MHz.

FIG. 1 FRONT

TYPE 067-0532-00

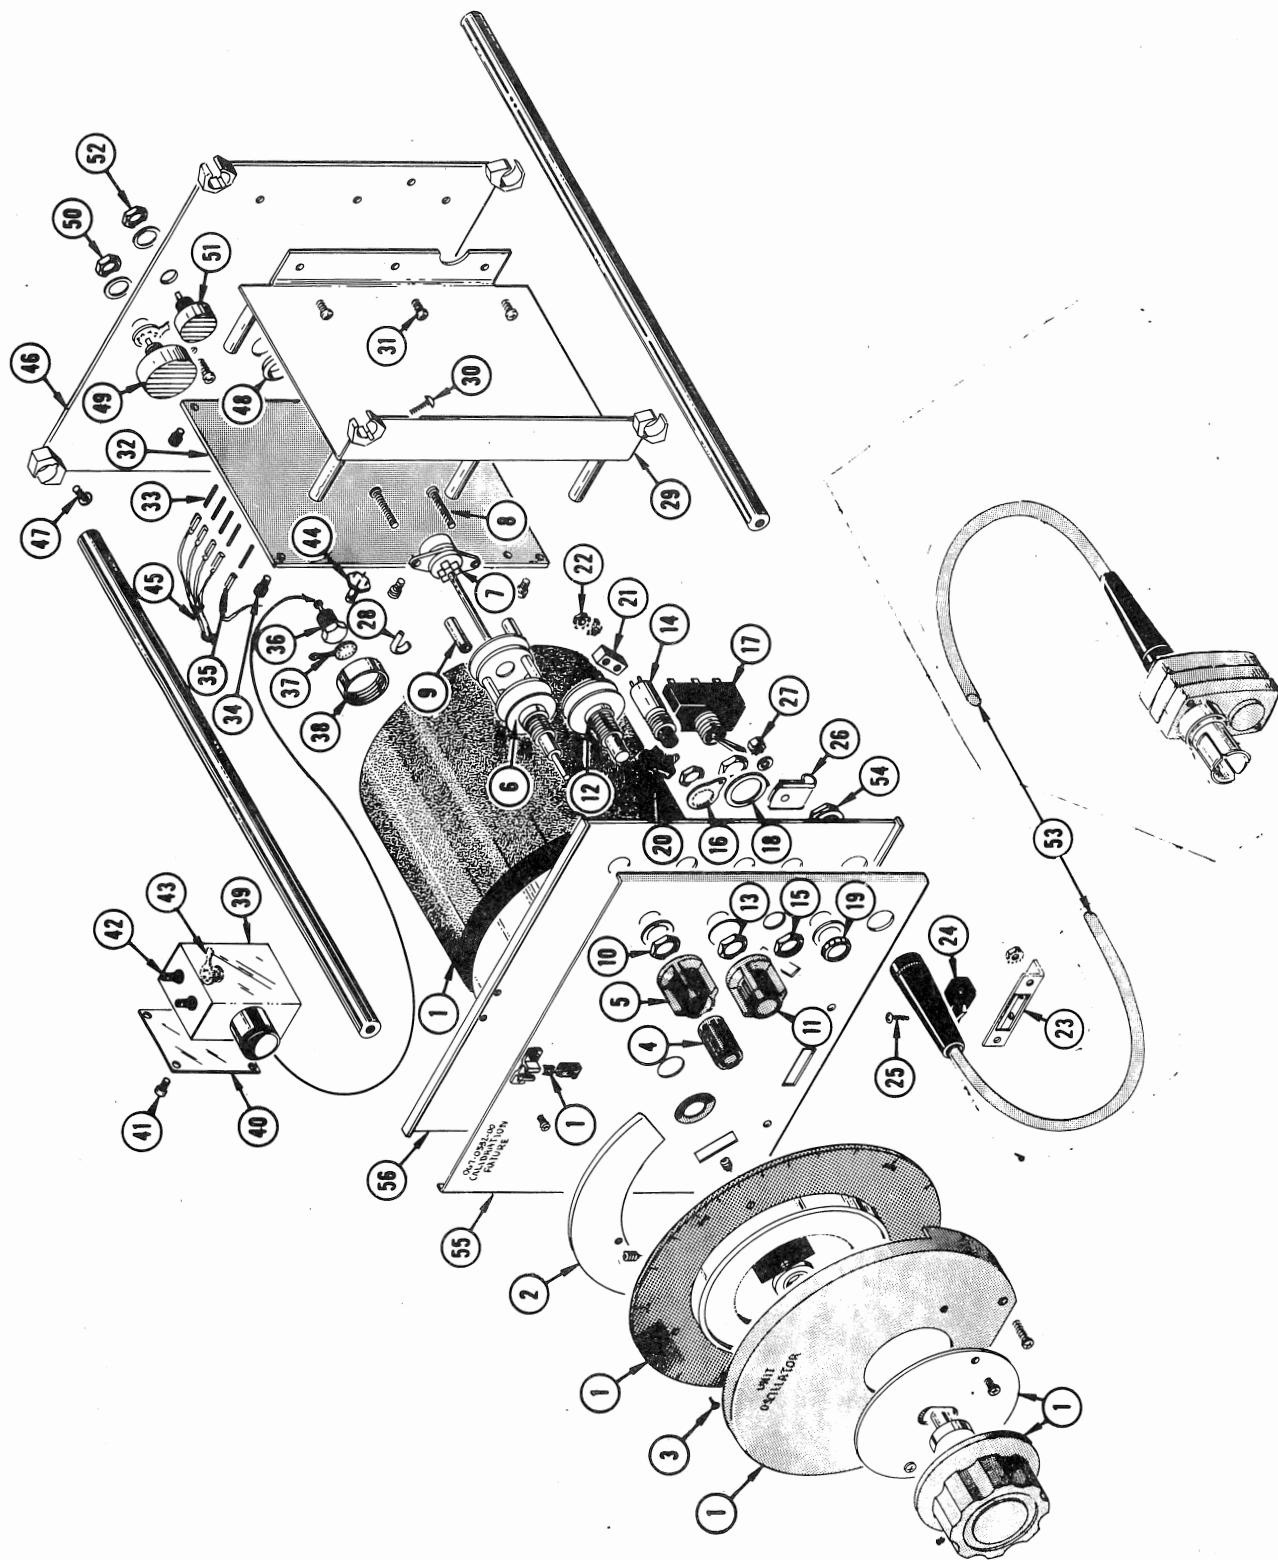

MECHANICAL PARTS LIST-067-0532-00
FIG. 1 FRONT

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF | DISC | Q T Y | DESCRIPTION |
|------------------------|-----------------------|---------------------|------|-------------|--|
| 1-1 | E119-0132-01 | | | 1 | OSCILLATOR |
| | - - - - - | | | - | oscillator includes: |
| | E407-0334-00 | | | 1 | BRACKET, resistor mounting |
| | - - - - - | | | - | RESISTOR, variable |
| | - - - - - | | | - | mounting hardware: (not included w/resistor) |
| | 210-0046-00 | | | 1 | LOCKWASHER, internal, 1/4 ID x 0.400 inch OD |
| | 210-0583-00 | | | 1 | NUT, hex., 1/4-32 x 5/16 inch |
| -2 | E401-0037-01 | | | 1 | CAM, control |
| | - - - - - | | | - | mounting hardware: (not included w/cam) |
| -3 | 211-0105-00 | | | 3 | SCREW, 4-40 x 3/16 inch, 100° csk, FHS |
| -4 | 366-0189-00 | | | 1 | KNOB, red--VARIABLE |
| | - - - - - | | | - | knob includes: |
| | 213-0020-00 | | | 1 | SCREW, set, 6-32 x 1/8 inch, HSS |
| -5 | 366-0322-00 | | | 1 | KNOB, charcoal--AMPLITUDE |
| | - - - - - | | | - | knob includes: |
| | 213-0004-00 | | | 1 | SCREW, set, 6-32 x 3/16 inch, HSS |
| -6 | 262-0745-00 | | | 1 | SWITCH, wired--AMPLITUDE |
| | - - - - - | | | - | switch includes: |
| | 260-0770-00 | | | 1 | SWITCH, unwired |
| | 384-0358-01 | | | 1 | ROD, extension |
| -7 | - - - - - | | | 1 | RESISTOR, variable |
| | - - - - - | | | - | mounting hardware: (not included w/resistor) |
| -8 | 211-0016-00 | | | 2 | SCREW, 4-40 x 5/8 inch, RHS |
| -9 | 166-0026-00 | | | 2 | TUBE, spacer |
| | - - - - - | | | - | mounting hardware: (not included w/switch) |
| | 210-0012-00 | | | 1 | LOCKWASHER, internal, 3/8 ID x 1/2 inch OD |
| | - - - - - | | | - | (not shown) |
| | 210-0840-00 | | | 1 | WASHER, flat, 0.390 ID x 9/16 inch OD |
| -10 | 210-0413-00 | | | 1 | NUT, hex., 3/8-32 x 1/2 inch |
| -11 | 366-0322-01 | | | 1 | KNOB, charcoal--FREQUENCY RANGE |
| | - - - - - | | | - | knob includes: |
| | 213-0004-00 | | | 1 | SCREW, set, 6-32 x 3/16 inch, HSS |
| -12 | 260-0462-00 | | | 1 | SWITCH, unwired--FREQUENCY RANGE |
| | - - - - - | | | - | mounting hardware: (not included w/switch) |
| | 210-0840-00 | | | 1 | WASHER, flat, 0.390 ID x 9/16 inch OD |
| -13 | 210-0413-00 | | | 1 | NUT, hex., 3/8-32 x 1/2 inch |

FIG. 1 FRONT (cont)

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF | Q T Y | DESCRIPTION |
|------------------------|-----------------------|---------------------|-------------|---|
| 1-14 | 136-0164-00 | | | 1 SOCKET, pilot light - mounting hardware: (not included w/socket) |
| -15 | 210-0413-00 | | | 2 NUT, hex., 3/8-32 x 1/2 inch |
| | 210-0840-00 | | | 1 WASHER, flat, 0.390 ID x 9/16 inch OD |
| -16 | 210-0255-00 | | | 1 LUG, solder, 3/8 inch ID |
| -17 | 260-0014-00 | | | 1 SWITCH, toggle--POWER ON - mounting hardware: (not included w/switch) |
| | 210-0414-00 | | | 1 NUT, hex., 15/32-32 x 9/16 inch |
| -18 | 354-0055-00 | | | 1 RING, locking |
| | 210-0902-00 | | | 1 WASHER, flat, 0.470 ID x 21/32 inch OD |
| -19 | 210-0473-00 | | | 1 NUT, 12 sided, 15/32-32 x 0.634 inch |
| -20 | E260-0516-01 | | | 2 SWITCH, push - mounting hardware for each: - (not included w/switch) |
| | 211-0112-00 | | | 2 SCREW, 2-56 x 3/8 inch, 100° csk, FHS - (not shown) |
| -21 | E407-0332-01 | | | 1 BRACKET, switch |
| -22 | 210-0457-00 | | | 2 NUT, keps, 6-32 x 5/16 inch |
| -23 | E407-0333-00 | | | 1 BRACKET, switch - mounting hardware: (not included w/bracket) 2 NUT, keps, 6-32 x 5/16 inch |
| -24 | E260-0516-01 | | | 1 SWITCH, push - mounting hardware: (not included w/switch) |
| -25 | 211-0112-00 | | | 2 SCREW, 2-56 x 3/8 inch, 100° csk, FHS |
| -26 | 343-0002-00 | | | 1 CLAMP, cable, plastic, 3/16 inch - mounting hardware: (not included w/clamp) |
| | 210-0851-00 | | | 1 WASHER, flat, 0.119 ID x 3/8 inch OD |
| -27 | 210-0586-00 | | | 1 NUT, keps, 4-40 x 1/4 inch |





FIG. 1 FRONT (cont)

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF | DISC | Q T Y | DESCRIPTION |
|------------------------|-----------------------|---------------------|------|-------------|--|
| 1-28 | 343-0088-00 | | | 2 | CLAMP, cable, small |
| -29 | E441-0726-00 | | | 1 | CHASSIS, circuit board |
| | ----- | | | - | chassis includes: |
| -30 | 211-0094-00 | | | 2 | SCREW, 4-40 x 1/2 inch, PHS |
| | ----- | | | - | mounting hardware: (not included w/chassis) |
| -31 | 211-0507-00 | | | 3 | SCREW, 6-32 x 5/16 inch, PHS |
| | | | | | |
| -32 | E388-0850-00 | | | 1 | BOARD, circuit, unwired--FILTER |
| | ----- | | | - | board includes: |
| -33 | 214-0506-00 | | | 19 | PIN, connector |
| | ----- | | | - | mounting hardware: (not included w/board) |
| -34 | 211-0116-00 | | | 5 | SCREW, sems, 4-40 x 5/16 inch, PHB |
| | | | | | |
| -35 | 131-0371-00 | | | 12 | CONNECTOR, single contact |
| -36 | E129-0006-01 | | | 1 | CONNECTOR, stand-off |
| -37 | 210-0206-00 | | | 1 | LUG, solder, SE #10 |
| -38 | 132-0001-00 | | | 1 | NUT, coupling |
| -39 | E337-1009-00 | | | 1 | SHIELD, box, RF |
| -40 | E337-1008-00 | | | 1 | COVER, box, RF |
| | ----- | | | - | mounting hardware: (not included w/cover) |
| -41 | 211-0001-00 | | | 4 | SCREW, 2-56 x 1/4 inch, RHS |
| | | | | | |
| -42 | 131-0372-00 | | | 2 | CONNECTOR, coaxial, w/mounting hardware |
| | ----- | | | - | mounting hardware for each: |
| | ----- | | | - | (not included w/connector) |
| -43 | 210-0206-00 | | | 1 | LUG, solder, SE #10 |
| | | | | | |
| -44 | 131-0391-00 | | | 2 | CONNECTOR, coaxial, male |
| -45 | E179-1168-00 | | | 1 | CABLE HARNESS, filter |
| | ----- | | | - | cable harness includes: |
| | 131-0049-00 | | | 6 | CONNECTOR, cable |
| -46 | E386-1209-00 | | | 1 | PLATE, chassis support |
| | ----- | | | - | plate includes: |
| -47 | 211-0094-00 | | | 4 | SCREW, 4-40 x 1/2 inch, PHS |
| -48 | 348-0063-00 | | | 1 | GROMMET, plastic, 1/2 inch diameter |
| -49 | ----- | | | 1 | RESISTOR, variable |
| | ----- | | | - | mounting hardware: (not included w/resistor) |
| | 210-0223-00 | | | 1 | LUG, solder, 1/4 ID x 7/16 inch OD, SE |
| | 210-0940-00 | | | 1 | WASHER, flat, 1/4 ID x 3/8 inch OD |
| -50 | 210-0583-00 | | | 1 | NUT, hex., 1/4-32 x 5/16 inch |

FIG. 1 FRONT (cont)

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF | DISC | Q | DESCRIPTION |
|------------------------|-----------------------|---------------------|------|---|--|
| | | | | T | |
| 1-51 | - - - - - | | | 1 | RESISTOR, variable |
| | - - - - - | | | - | mounting hardware: (not included w/resistor) |
| | 210-0940-00 | | | 1 | WASHER, flat, 1/4 ID x 3/8 inch OD |
| -52 | 210-0583-00 | | | 1 | NUT, hex., 1/4-32 x 5/16 inch |
| -53 | E175-0434-00 | | | 1 | CABLE ASSEMBLY, special purpose |
| | - - - - - | | | - | mounting hardware: |
| | - - - - - | | | - | (not included w/cable assembly) |
| | 210-0021-00 | | | 1 | LOCKWASHER, internal, 0.472 ID x 0.593 inch OD |
| -54 | 210-0559-00 | | | 1 | NUT, hex., 7/16-28 x 9/16 inch |
| -55 | E333-0981-01 | | | 1 | PANEL, front |
| -56 | E386-1210-00 | | | 1 | PLATE, sub-panel |

FIG. 2 REAR

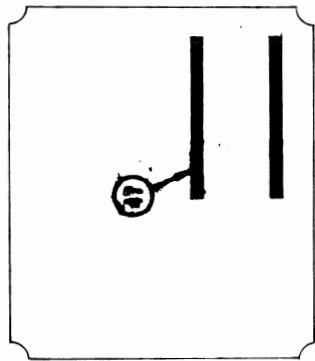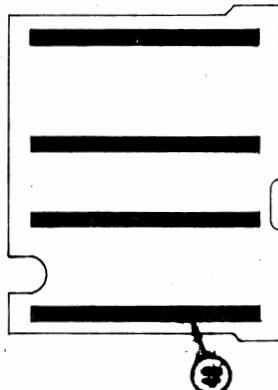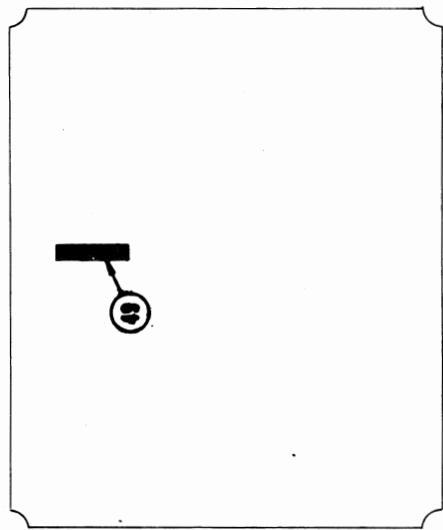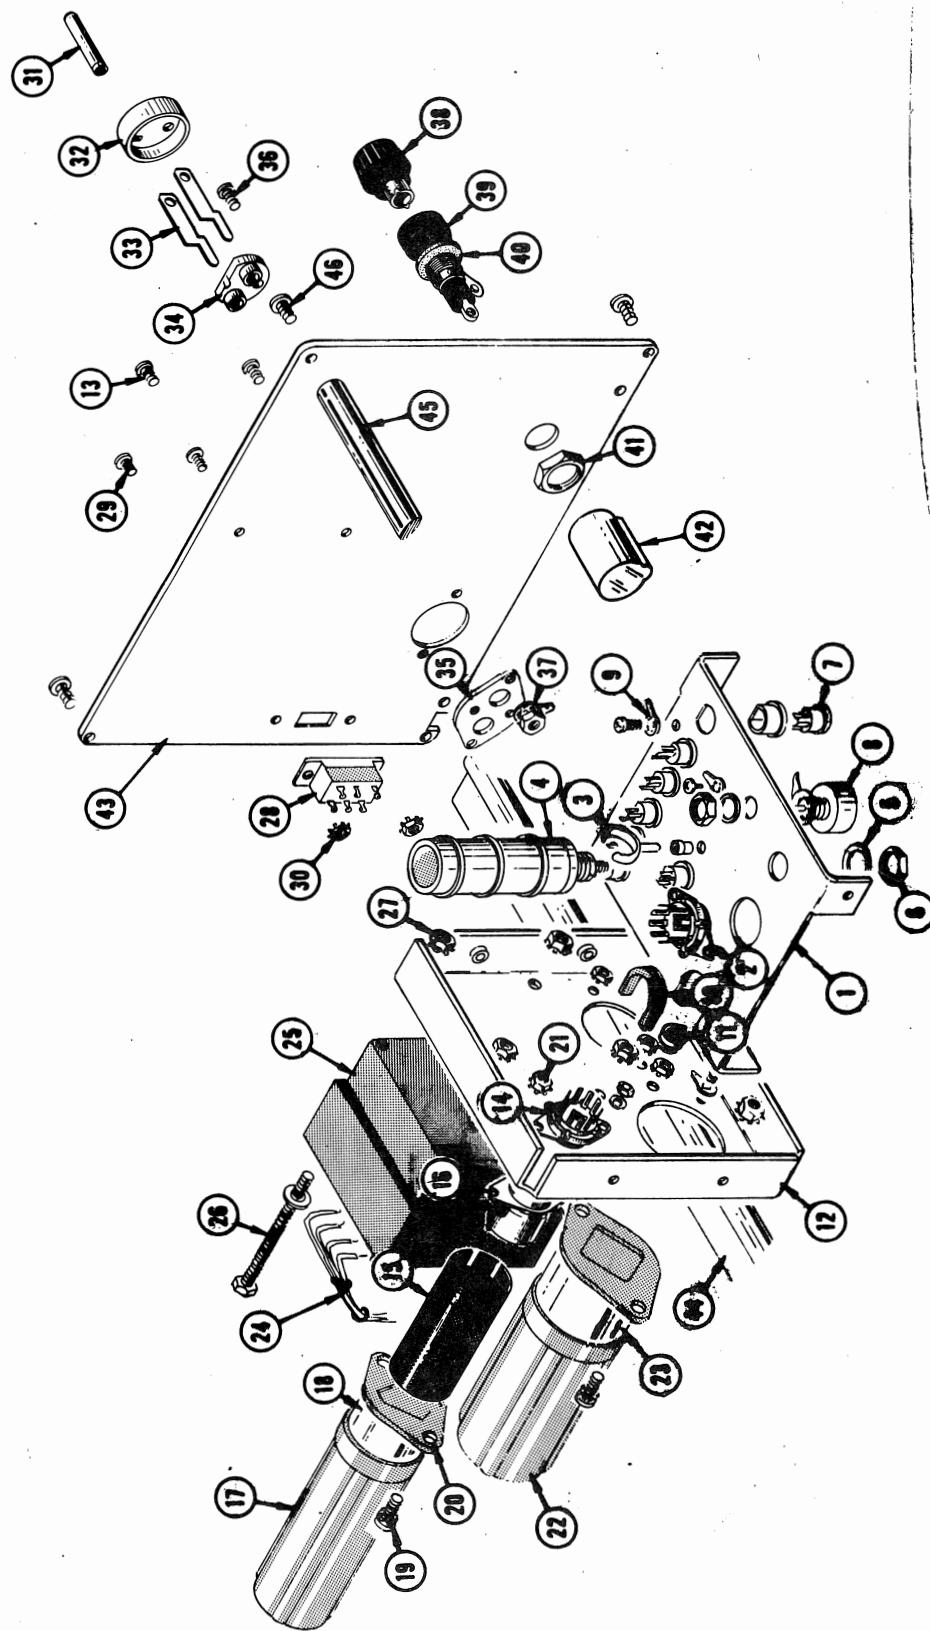

MECHANICAL PARTS LIST-067-0532-00
FIG. 2 REAR

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF DISC | Q T Y | DESCRIPTION |
|------------------------|---|-------------------------------|-------------|---|
| 2-1 | E441-0725-00 - - - - - 211-0507-00 | | | 1 CHASSIS, amplifier - mounting hardware: (not included w/chassis) 2 SCREW, 6-32 x 5/16 inch, PHS |
| -2 | 136-0015-00 - - - - - 213-0044-00 | | | 1 SOCKET, tube, 9 pin, w/ground lugs - mounting hardware: (not included w/socket) 2 SCREW, thread forming, 5-32 x 3/16 inch, PHS |
| -3 | 426-0121-00 - - - - - 361-0007-00 | | | 1 HOLDER, toroid - mounting hardware: (not included w/holder) 1 SPACER, plastic, 1/16 inch long |
| -4 | - - - - - - - - - - -5 210-0840-00 -6 210-0413-00 | | | 1 COIL - mounting hardware: (not included w/coil) 1 WASHER, flat, 0.390 ID x 9/16 inch OD 1 NUT, hex., 3/8-32 x 1/2 inch |
| -7 | 136-0181-00 - - - - - - - - - - 354-0234-00 | | | 7 SOCKET, transistor, 3 pin - mounting hardware for each: - (not included w/socket) 1 RING, socket mounting |
| -8 | - - - - - - - - - - 210-0223-00 210-0940-00 210-0583-00 | | | 1 RESISTOR, variable - mounting hardware: (not included w/resistor) 1 LUG, solder, 1/4 ID x 7/16 inch OD, SE 1 WASHER, flat, 1/4 ID x 3/8 inch OD 1 NUT, hex., 1/4-32 x 5/16 inch |
| -9 | 210-0201-00 - - - - - - - - - - 213-0044-00 | | | 5 LUG, solder, SE #4 - mounting hardware for each: - (not included w/lug) 1 SCREW, thread forming, 5-32 x 3/16 inch, PHS |
| -10 | 358-0215-00 | | | 1 BUSHING, plastic |
| -11 | 348-0063-00 | | | 1 GROMMET, plastic, 1/2 inch diameter |

FIG. 2 REAR (cont)

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF DISC | Q T Y | DESCRIPTION |
|------------------------|-----------------------|-------------------------------|-------------|---|
| 2-12 | E441-0724-00 | | 1 | CHASSIS, power supply |
| | - - - - - | | - | mounting hardware: (not included w/chassis) |
| -13 | 211-0507-00 | | 4 | SCREW, 6-32 x 5/16 inch, PHS |
| -14 | 136-0015-00 | | 1 | SOCKET, tube, 9 pin, w/ground lugs |
| | - - - - - | | - | mounting hardware: (not included w/socket) |
| | 211-0008-00 | | 2 | SCREW, 4-40 x 1/4 inch, PHS |
| | 210-0004-00 | | 2 | LOCKWASHER, internal, #4 |
| | 210-0406-00 | | 2 | NUT, hex., 4-40 x 3/16 inch |
| -15 | 337-0810-00 | | 1 | SHIELD, tube |
| -16 | 337-0005-00 | | 1 | SHIELD, tube socket |
| -17 | 200-0255-00 | | 1 | COVER, capacitor, plastic, 1 ID |
| | - - - - - | | - | x 3 1/32 inches long |
| -18 | - - - - - | | 1 | CAPACITOR |
| | - - - - - | | - | mounting hardware: (not included w/capacitor) |
| -19 | 211-0507-00 | | 2 | SCREW, 6-32 x 5/16 inch, PHS |
| -20 | 386-0252-00 | | 1 | PLATE, fiber, small |
| -21 | 210-0457-00 | | 2 | NUT, keps, 6-32 x 5/16 inch |
| -22 | 200-0258-00 | | 1 | COVER, capacitor, plastic, 1.365 ID |
| | - - - - - | | - | x 3 1/32 inches long |
| -23 | - - - - - | | 1 | CAPACITOR |
| | - - - - - | | - | mounting hardware: (not included w/capacitor) |
| | 211-0507-00 | | 2 | SCREW, 6-32 x 5/16 inch, PHS |
| | 386-0254-00 | | 1 | PLATE, fiber, large |
| | 210-0457-00 | | 2 | NUT, keps, 6-32 x 5/16 inch |
| -24 | E179-1167-00 | | 1 | CABLE HARNESS, main |
| -25 | - - - - - | | 1 | TRANSFORMER |
| | - - - - - | | - | transformer includes: |
| -26 | 212-0515-00 | | 4 | SCREW, 10-32 x 2 1/4 inches, HHS |
| | 210-0812-00 | | 4 | WASHER, fiber, #10 |
| | - - - - - | | - | mounting hardware: (not included w/transformer) |
| -27 | 220-0410-00 | | 4 | NUT, keps, 10-32 x 3/8 inch |


FIG. 2 REAR (cont)

| Fig. & Index No. | Tektronix Part No. | Serial/Model Eff | No. Disc | Q | | | | | Description | | |
|------------------------|-----------------------|---------------------|-------------|---|---|---|---|---|-------------|---|--|
| | | | | t | y | 1 | 2 | 3 | 4 | 5 | |
| 2-28 | 260-0675-00 | | | 1 | | SWITCH, slide | | | | | |
| | - - - - - | | | - | | mounting hardware: (not included w/switch) | | | | | |
| -29 | 211-0008-00 | | | 2 | | SCREW, 4-40 x 1/4 inch, PHS | | | | | |
| -30 | 210-0586-00 | | | 2 | | NUT, keps, 4-40 x 1/4 inch | | | | | |
| | 131-0102-01 | | | 1 | | CONNECTOR, 3 wire, male | | | | | |
| | - - - - - | | | - | | connector includes: | | | | | |
| -31 | 129-0041-01 | | | 1 | | POST, ground | | | | | |
| -32 | 200-0185-01 | | | 1 | | COVER, black plastic | | | | | |
| -33 | 214-0078-00 | | | 2 | | PIN, connecting | | | | | |
| -34 | 377-0051-00 | | | 1 | | INSERT, black plastic | | | | | |
| -35 | 386-0933-00 | | | 1 | | PLATE | | | | | |
| | 211-0132-00 | | | 1 | | SCREW, sems, 4-40 x 1/2 inch, PHS | | | | | |
| | 213-0088-00 | | | 1 | | SCREW, thread forming, #4 x 1/4 inch, PHS | | | | | |
| | - - - - - | | | - | | mounting hardware: (not included w/connector) | | | | | |
| -36 | 211-0507-00 | | | 2 | | SCREW, 6-32 x 5/16 inch, PHS | | | | | |
| -37 | 210-0202-00 | | | 2 | | LUG, solder, SE #6 | | | | | |
| | 210-0457-00 | | | 2 | | NUT, keps, 6-32 x 5/16 inch | | | | | |
| | 352-0002-00 | | | 1 | | ASSEMBLY, fuse holder | | | | | |
| | - - - - - | | | - | | assembly includes: | | | | | |
| -38 | 200-0582-00 | | | 1 | | CAP, fuse | | | | | |
| -39 | 352-0010-00 | | | 1 | | HOLDER, fuse | | | | | |
| -40 | 210-0873-00 | | | 1 | | WASHER, rubber, 1/4 ID x 11/16 inch OD | | | | | |
| -41 | - - - - - | | | 1 | | NUT, fuse holder | | | | | |
| -42 | 200-0237-00 | | | 1 | | COVER, fuse holder | | | | | |
| -43 | E386-1208-00 | | | 1 | | PLATE, rear | | | | | |
| -44 | 351-0096-00 | | | 1 | | GUIDE, rail | | | | | |
| | - - - - - | | | - | | mounting hardware: (not included w/guide) | | | | | |
| | 212-0044-00 | | | 2 | | SCREW, 8-32 x 1/2 inch, PHS (not shown) | | | | | |
| | 211-0538-00 | | | 2 | | SCREW, 6-32 x 5/16 inch, 100° csk, FHS | | | | | |
| | - - - - - | | | - | | (not shown) | | | | | |
| -45 | 384-0615-00 | | | 3 | | ROD, spacer | | | | | |
| | - - - - - | | | - | | mounting hardware for each: | | | | | |
| | - - - - - | | | - | | (not included w/rod) | | | | | |
| -46 | 212-0044-00 | | | 1 | | SCREW, 8-32 x 1/2 inch, PHS | | | | | |

FIG. 2 REAR (cont)

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF DISC | Q T Y | DESCRIPTION |
|------------------------|-----------------------|-------------------------------|-------------|---|
| 2-47 | 124-0146-00 | | 2 | STRIP, ceramic, 7/16 inch h, w/16 notches |
| | - - - - - | | - | each strip includes: |
| | 355-0046-00 | | 2 | STUD, plastic |
| | - - - - - | | - | mounting hardware for each: |
| | - - - - - | | - | (not included w/strip) |
| | 361-0009-00 | | 2 | SPACER, plastic, 9/32 inch long |
| -48 | 124-0145-00 | | 4 | STRIP, ceramic, 7/16 inch h, w/20 notches |
| | - - - - - | | - | each strip includes: |
| | 355-0046-00 | | 2 | STUD, plastic |
| | - - - - - | | - | mounting hardware for each: |
| | - - - - - | | - | (not included w/strip) |
| | 361-0009-00 | | 2 | SPACER, plastic, 9/32 inch long |
| -49 | 124-0162-00 | | 1 | STRIP, ceramic, 7/16 inch h, w/4 notches |
| | - - - - - | | - | strip includes: |
| | 355-0046-00 | | 1 | STUD, plastic |
| | - - - - - | | - | mounting hardware: (not included w/strip) |
| | 361-0007-00 | | 1 | SPACER, plastic, 7/16 inch long |

MECHANICAL PARTS LIST-067-0532-00
 FIG. 3 CABINET

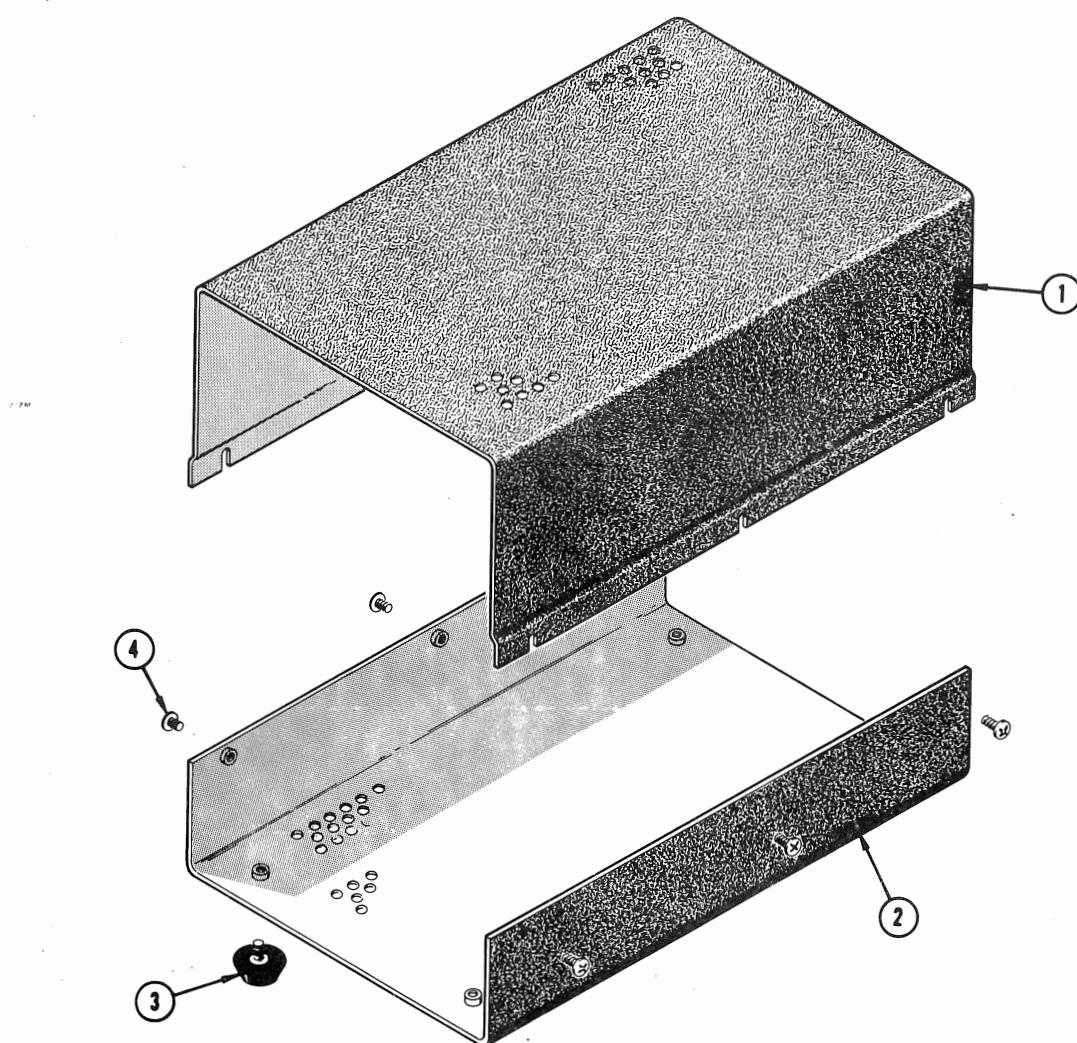

| FIG. & INDEX NO. | TEKTRONIX PART NO. | SERIAL/MODEL EFF | DISC | Q T Y | DESCRIPTION |
|------------------------|-----------------------|---------------------|------|-------------|-------------|
|------------------------|-----------------------|---------------------|------|-------------|-------------|

| | | | | | |
|-------|--------------|--|--|---|--------------------------------------|
| 3-1 | E386-1217-00 | | | 1 | CABINET, top |
| -2 | E386-1216-00 | | | 1 | CABINET, bottom |
| -3 | 348-0048-00 | | | 4 | FOOT, rubber |
| -4 | 211-0504-00 | | | 6 | SCREW, 6-32 x 1/4 inch, PHS |
| | 210-0803-00 | | | 6 | WASHER, flat, 0.150 ID x 3/8 inch OD |
| ----- | | | | - | (not shown) |

ELECTRICAL PARTS LIST - 067-0532-00

Values are fixed unless marked Variable.

| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Disc | Description |
|--|--------------------|-------------------------|--------|--------------------|
| Bulb | | | | |
| B209 | 150-0068-00 | | | Pilot Light |
| Capacitors | | | | |
| Tolerance $\pm 20\%$ unless otherwise indicated. | | | | |
| C4 | 281-0623-00 | 650 pF | Cer | 500 V 5% |
| C6 | 281-0524-00 | 150 pF | Cer | 500 V |
| C7 | 281-0519-00 | 47 pF | Cer | 500 V 10% |
| C9 | 283-0078-00 | 0.001 μ F | Cer | 500 V |
| C12 | 281-0523-00 | 100 pF | Cer | 350 V |
| C22 | 283-0072-01 | 0.01 μ F | Cer | |
| C24 | 283-0072-01 | 0.01 μ F | Cer | |
| C25 | 283-0072-01 | 0.01 μ F | Cer | |
| C42 | 283-0083-00 | 0.0047 μ F | Cer | 500 V 5% |
| C72 | 283-0081-00 | 0.1 μ F | Cer | 25 V +80%-20% |
| C75 | 283-0078-00 | 0.001 μ F | Cer | 500 V |
| C77 | 283-0078-00 | 0.001 μ F | Cer | 500 V |
| C88 | 290-0145-00 | 10 μ F | Elect. | 50 V |
| C102 | 281-0610-00 | 2.2 pF | Cer | 200 V ± 0.1 pF |
| C103 | 281-0626-00 | 3.3 pF | Cer | 500 V 5% |

| Ckt. No. | Tektronix Part No. | Serial/Model No. | Eff | Disc | Description | | |
|-------------------|--------------------|------------------|-----|---------|-------------|-------|---------|
| Capacitors (cont) | | | | | | | |
| C105 | 281-0610-00 | | | 2.2 pF | Cer | 200 V | ±0.1 pF |
| C106 | 281-0626-00 | | | 3.3 pF | Cer | 500 V | 5% |
| C108 | 281-0610-00 | | | 2.2 pF | Cer | 200 V | ±0.1 pF |
| C109 | 281-0626-00 | | | 3.3 pF | Cer | 500 V | 5% |
| C112 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C113 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C115 | 281-0626-00 | | | 3.3 pF | Cer | 500 V | 5% |
| C119 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C120 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C121 | 281-0610-00 | | | 2.2 pF | Cer | 200 V | ±0.1 pF |
| C122 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C123 | 281-0610-00 | | | 2.2 pF | Cer | 200 V | ±0.1 pF |
| C125 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C126 | 281-0626-00 | | | 3.3 pF | Cer | 500 V | 5% |
| C127 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C128 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C142 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C143 | 283-0003-00 | | | 0.01 μF | Cer | 150 V | |
| C144 | 281-0503-00 | | | 8.0 pF | Cer | 500 V | ±0.5 pF |
| C145 | 281-0503-00 | | | 8.0 pF | Cer | 500 V | ±0.5 pF |
| C147 | 281-0592-00 | | | 4.7 pF | Cer | | ±0.5 pF |

| Ckt. No. | Tektronix Part No. | Serial/Model No. | Eff | Disc | Description | | |
|-------------------|--------------------|------------------|-----|---------|-------------|-------|---------|
| Capacitors (cont) | | | | | | | |
| C148 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C150 | 281-0572-00 | | | 6.8 pF | Cer | 500 V | 10% |
| C151 | 281-0504-00 | | | 10 pF | Cer | 500 V | 10% |
| C153 | 281-0572-00 | | | 6.8 pF | Cer | 500 V | 10% |
| C154 | 281-0504-00 | | | 10 pF | Cer | 500 V | 10% |
| C156 | 281-0572-00 | | | 6.8 pF | Cer | 500 V | 10% |
| C157 | 281-0504-00 | | | 10 pF | Cer | 500 V | 10% |
| C159 | 281-0592-00 | | | 4.7 pF | Cer | | ±0.5 pF |
| C160 | 281-0601-00 | | | 7.5 pF | Cer | 500 V | ±0.5 pF |
| C162 | 281-0503-00 | | | 8.0 pF | Cer | 500 V | ±0.5 pF |
| C163 | 281-0503-00 | | | 8.0 pF | Cer | 500 V | ±0.5 |
| C167 | 283-0003-00 | | | 0.01 µF | Cer | 150 V | |
| C168 | 283-0003-00 | | | 0.01 µF | Cer | 150 V | |
| C171 | 283-0003-00 | | | 0.01 µF | Cer | 150 V | |
| C172 | 283-0003-00 | | | 0.01 µF | Cer | 150 V | |
| C173 | 281-0577-00 | | | 14 pF | Cer | 500 V | 5% |
| C174 | 281-0557-00 | | | 1.8 pF | Cer | 500 V | |
| C176 | 281-0504-00 | | | 10 pF | Cer | 500 V | 10% |
| C177 | 281-0576-00 | | | 11 pF | Cer | 500 V | 5% |
| C179 | 281-0504-00 | | | 10 pF | Cer | 500 V | 10% |
| C180 | 281-0578-00 | | | 18 pF | Cer | 500 V | 5% |

| Tektronix Ckt. No. | Part No. | Serial/Model No. Eff | Disc | Description | | |
|-----------------------|--------------|-------------------------|----------|-----------------------|-------|----------|
| Capacitors (cont) | | | | | | |
| C182 | 281-0504-00 | | 10 pF | Cer | 500 V | 10% |
| C183 | 281-0578-00 | | 18 pF | Cer | 500 V | 5% |
| C185 | 281-0504-00 | | 10 pF | Cer | 500 V | 10% |
| C186 | 281-0578-00 | | 18 pF | Cer | 500 V | 5% |
| C188 | 281-0504-00 | | 10 pF | Cer | 500 V | 10% |
| C189 | 281-0576-00 | | 11 pF | Cer | 500 V | 5% |
| C192 | 281-0557-00 | | 1.8 pF | Cer | 500 V | |
| C193 | 281-0577-00 | | 14 pF | Cer | 500 V | |
| C197 | 283-0003-00 | | 0.01 μF | Cer | 150 V | |
| C198 | 283-0003-00 | | 0.01 μF | Cer | 150 V | |
| C201 | 283-0078-00 | | 0.001 μF | Cer | 500 V | |
| C202 | 283-0078-00 | | 0.001 μF | Cer | 500 V | |
| C219 | 290-0277-00 | | 2x140 μF | Elect. | 100 V | |
| C236 | 283-0002-00 | | 0.01 μF | Cer | 500 V | |
| C239 | 290-0209-00 | | 50 μF | Elect. | 25 V | +75%-10% |
| C254A,B | 290-0262-00 | | 2x40 μF | Elect. | 500 V | |
| Diodes | | | | | | |
| D24 | *152-0205-00 | | GaAs | Tek made | | |
| D25 | *152-0205-00 | | GaAs | Tek made | | |
| D27 | *152-0185-00 | | Silicon | Replaceable by 1N3605 | | |
| D28 | *152-0185-00 | | Silicon | Replaceable by 1N3605 | | |

| Ckt. No. | Tektronix Part No. | Eff | Serial/Model No. Disc | Description |
|----------------------|--------------------|-----|--------------------------|--------------------------|
| Diodes (cont) | | | | |
| D70 | *152-0185-00 | | Silicon | Replaceable by 1N4152 |
| D73 | 152-0299-00 | | Zener | 1N3920B 1.5 W, 200 V, 5% |
| D74 | 152-0247-00 | | Zener | 1N989B 0.4 W, 150 V, 5% |
| D81 | *152-0185-00 | | Silicon | Replaceable by 1N4152 |
| D88 | 152-0067-00 | | Zener | 1M25Z10 1 W, 25 V, 10% |
| D212A, C, D (4) | B*152-0107-00 | | Silicon | Replaceable by 1N647 |
| D223 | *152-0185-00 | | Silicon | Replaceable by 1N4152 |
| D224 | *152-0185-00 | | Silicon | Replaceable by 1N4152 |
| D225 | 152-0166-00 | | Zener | 1N753A 0.4 W, 6.2 V, 5% |
| D235 | 152-0166-00 | | Zener | 1N753A 0.4 W, 6.2 V, 5% |
| D253A, C, D (4) | B*152-0208-00 | 219 | Silicon | Replaceable by 1N3195 |
| +D253 | 152-0232-00 | 220 | Silicon | Full Wave Bridge 10DB6A |
| Fuse | | | | |
| F201 | 159-0031-00 | | 0.4 A 3AG Slo-Blo | |
| Connectors | | | | |
| J11 | 131-0372-00 | | Coaxial | |
| J12 | 131-0372-00 | | Coaxial | |
| J100 | 131-0371-00 | | Single Contact, male | |
| J199 | 131-0371-00 | | Single Contact, male | |

| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Serial/Model No. Disc | Description |
|-----------|-----------------------|-------------------------|--------------------------|---------------------------------------|
| Relays | | | | |
| K111 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K111-A | 260-0721-00 | | | Reed |
| K129 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K129-A | 260-0721-00 | | | Reed |
| K141 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K141-A | 260-0721-00 | | | Reed |
| K169 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K169-A | 260-0721-00 | | | Reed |
| K171 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K171-A | 260-0721-00 | | | Reed |
| K199 | *108-0358-00 | | | Coil, Reed (typical resistance 900 Ω) |
| K199-A | 260-0721-00 | | | Reed |
| Inductors | | | | |
| L9 | *108-0103-00 | | | 2.5 μH |
| L12 | *108-0095-00 | | | 1.4 μH |
| L13 | 276-0507-00 | | | Core, Ferramic Suppressor |
| L14 | 276-0507-00 | | | Core, Ferramic Suppressor |
| L72 | 276-0507-00 | | | Core, Ferramic Suppressor |

| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Disc | Description |
|------------------|-----------------------|-------------------------|------|--------------|
| Inductors (cont) | | | | |
| L101 | *108-0313-00 | | | 0.05 μ H |
| L104 | E*108-0434-00 | | | 0.06 μ H |
| L107 | E*108-0434-00 | | | 0.06 μ H |
| L109 | *108-0313-00 | | | 0.05 μ H |
| L115 | *108-0313-00 | | | 0.05 μ H |
| L117 | *108-0319-00 | | | 0.08 μ H |
| L119 | E*108-0433-00 | | | 0.09 μ H |
| L121 | E*108-0433-00 | | | 0.09 μ H |
| L123 | E*108-0433-00 | | | 0.09 μ H |
| L125 | *108-0319-00 | | | 0.08 μ H |
| L126 | *108-0313-00 | | | 0.05 μ H |
| L145 | *108-0313-00 | | | 0.05 μ H |
| L148 | E*108-0435-00 | | | 0.16 μ H |
| L151 | E*108-0435-00 | | | 0.16 μ H |
| L154 | E*108-0435-00 | | | 0.16 μ H |
| L157 | E*108-0435-00 | | | 0.16 μ H |
| L162 | *108-0313-00 | | | 0.05 μ H |
| L173 | *108-0319-00 | | | 0.08 μ H |
| L177 | E*108-0436-00 | | | 0.26 μ H |
| L180 | E*108-0436-00 | | | 0.26 μ H |


| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Serial/Model No. Disc | Description | | |
|--|--------------------|-------------------------|--------------------------|-----------------------|----|----|
| Inductors (cont) | | | | | | |
| L183 | E*108-0436-00 | | 0.26 μ H | | | |
| | E*108-0436-00 | | 0.26 μ H | | | |
| L192 | *108-0319-00 | | 0.08 μ H | | | |
| Transistors | | | | | | |
| Q43 | *151-0155-00 | | Silicon | Replaceable by 2N2925 | | |
| Q54 | *151-0155-00 | | Silicon | Replaceable by 2N2925 | | |
| Q63 | *151-0155-00 | | Silicon | Replaceable by 2N2925 | | |
| Q74 | 151-0169-00 | | Silicon | 2N3439 | | |
| Q224 | *151-0096-00 | | Silicon | Deleted from 2N1893 | | |
| Q234 | *151-0155-00 | | Silicon | Replaceable by 2N2925 | | |
| Q237 | 151-0164-00 | | Silicon | 2N3702 | | |
| Resistors | | | | | | |
| Resistors are fixed, composition, $\pm 10\%$ unless otherwise indicated. | | | | | | |
| R3 | 308-0234-00 | | 5 k Ω | 8 W | WW | 5% |
| R4 | 315-0563-00 | | 56 k Ω | 1/4 W | | 5% |
| R9 | 315-0151-00 | | 150 Ω | 1/4 W | | 5% |
| R17 | 315-0471-00 | | 470 Ω | 1/4 W | | 5% |
| R19 | 311-0458-00 | | 5 k Ω , Var | | | |
| R20 | 307-0079-00 | | 50 Ω | | | |
| R21 | 315-0152-00 | | 1.5 k Ω | 1/4 W | | 5% |
| R24 | 315-0101-00 | | 100 Ω | 1/4 W | | 5% |
| R25 | 315-0101-00 | | 100 Ω | 1/4 W | | 5% |

| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | No. Disc | Description | | |
|------------------|--------------------|-------------------------|-------------|-------------|-------|-----------|
| Resistors (cont) | | | | | | |
| R31 | *311-0586-00 | | | 1 kΩ, Var | | |
| R33 | 311-0404-00 | | | 1 kΩ, Var | | |
| R34 | 321-0174-00 | | | 634 Ω | 1/8 W | Prec 1% |
| R36 | 311-0344-00 | | | 100 Ω, Var | | |
| R37 | 321-0129-00 | | | 215 Ω | 1/8 W | Prec 1% |
| R38A | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38B | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38C | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38D | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38E | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38F | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38G | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38H | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38J | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38K | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R38L | 322-0649-00 | | | 266 Ω | 1/4 W | Prec 1/2% |
| R41 | 315-0101-00 | | | 100 Ω | 1/4 W | 5% |
| R42 | 302-0125-00 | | | 1.2 MΩ | 1/2 W | |
| R46 | 315-0103-00 | | | 10 kΩ | 1/4 W | 5% |
| R51 | 315-0103-00 | | | 10 kΩ | 1/4 W | 5% |


| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Disc | Description | |
|------------------|-----------------------|-------------------------|-----------|-------------|---------|
| Resistors (cont) | | | | | |
| R53 | 315-0821-00 | 219 | 820 Ω | 1/4 W | 5% |
| R53 | 315-0681-00 | 220 | 680 Ω | 1/4 W | 5% |
| R58 | 315-0123-00 | | 12 kΩ | 1/4 W | 5% |
| R63 | 315-0272-00 | | 2.7 kΩ | 1/4 W | 5% |
| R66 | 315-0203-00 | | 20 kΩ | 1/4 W | 5% |
| R74 | 304-0474-00 | | 470 kΩ | 1 W | |
| R77 | 315-0102-00 | | 1 kΩ | 1/4 W | 5% |
| R82 | 302-0270-00 | | 27 Ω | 1/2 W | |
| R83 | 302-0270-00 | | 27 Ω | 1/2 W | |
| R85 | 302-0474-00 | | 470 kΩ | 1/2 W | |
| R130 | 315-0471-00 | | 470 Ω | 1/4 W | 5% |
| R140 | 315-0471-00 | | 470 Ω | 1/4 W | 5% |
| R190 | 315-0431-00 | | 430 Ω | 1/4 W | 5% |
| R210 | 315-0100-00 | | 10 Ω | 1/4 W | 5% |
| R211 | 315-0100-00 | | 10 Ω | 1/4 W | 5% |
| R221 | 302-0123-00 | | 12 kΩ | 1/2 W | |
| R226 | 323-0150-00 | | 357 Ω | 1/2 W | Prec 1% |
| R231 | 311-0404-00 | | 1 kΩ, Var | | |
| R232 | 321-0206-00 | | 1.37 kΩ | 1/8 W | Prec 1% |
| R233 | 321-0239-00 | | 3.01 kΩ | 1/8 W | Prec 1% |


| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Serial/Model No. Disc | Description | | |
|------------------|--------------------|-------------------------|--------------------------|-----------------|-------------|----|
| Resistors (cont) | | | | | | |
| R235 | 321-0184-00 | | 806 Ω | 1/8 W | Prec | 1% |
| R237 | 316-0271-00 | | 270 Ω | 1/4 W | | |
| R241 | 301-0104-00 | | 100 kΩ | 1/2 W | | 5% |
| R251 | 302-0100-00 | | 10 Ω | 1/2 W | | |
| R255 | 304-0271-00 | | 270 Ω | 1 W | | |
| R257 | 304-0153-00 | | 15 kΩ | 1 W | | |
| R258 | 306-0184-00 | | 180 kΩ | 2 W | | |
| R259 | 321-0039-00 | | 24.9 Ω | 1/8 W | Prec | 1% |
| Switches | | | | | | |
| | Unwired | Wired | | | | |
| SW1 | 260-0462-00 | | Rotary | FREQUENCY RANGE | | |
| SW36 | 260-0770-00 | | Rotary | AMPLITUDE | | |
| SW130 | E*260-0516-01 | | Micro | | | |
| SW140 | E*260-0516-01 | | Micro | | | |
| SW190 | E*260-0516-01 | | Micro | | | |
| SW201 | 260-0014-00 | | Toggle | POWER | | |
| SW202 | 260-0675-00 | | Slide | 115 V/230 V | | |
| Transformers | | | | | | |
| T8 | *114-0061-00 | | 70-99 μH, Var | Core | 276-0508-00 | |
| T40 | 276-0525-00 | | Core, Ferrite | | | |
| T201 | E*120-0474-00 | | L.V. Power | | | |

| Ckt. No. | Tektronix Part No. | Serial/Model No. Eff | Disc | Description |
|----------------|-----------------------|-------------------------|------|-------------|
| Electron Tubes | | | | |
| V10 | 154-0187-00 | | 6DJ8 | |
| V83 | 154-0340-00 | | 7119 | |
| Oscillator | | | | |
| | E119-0132-01 | | | Oscillator |

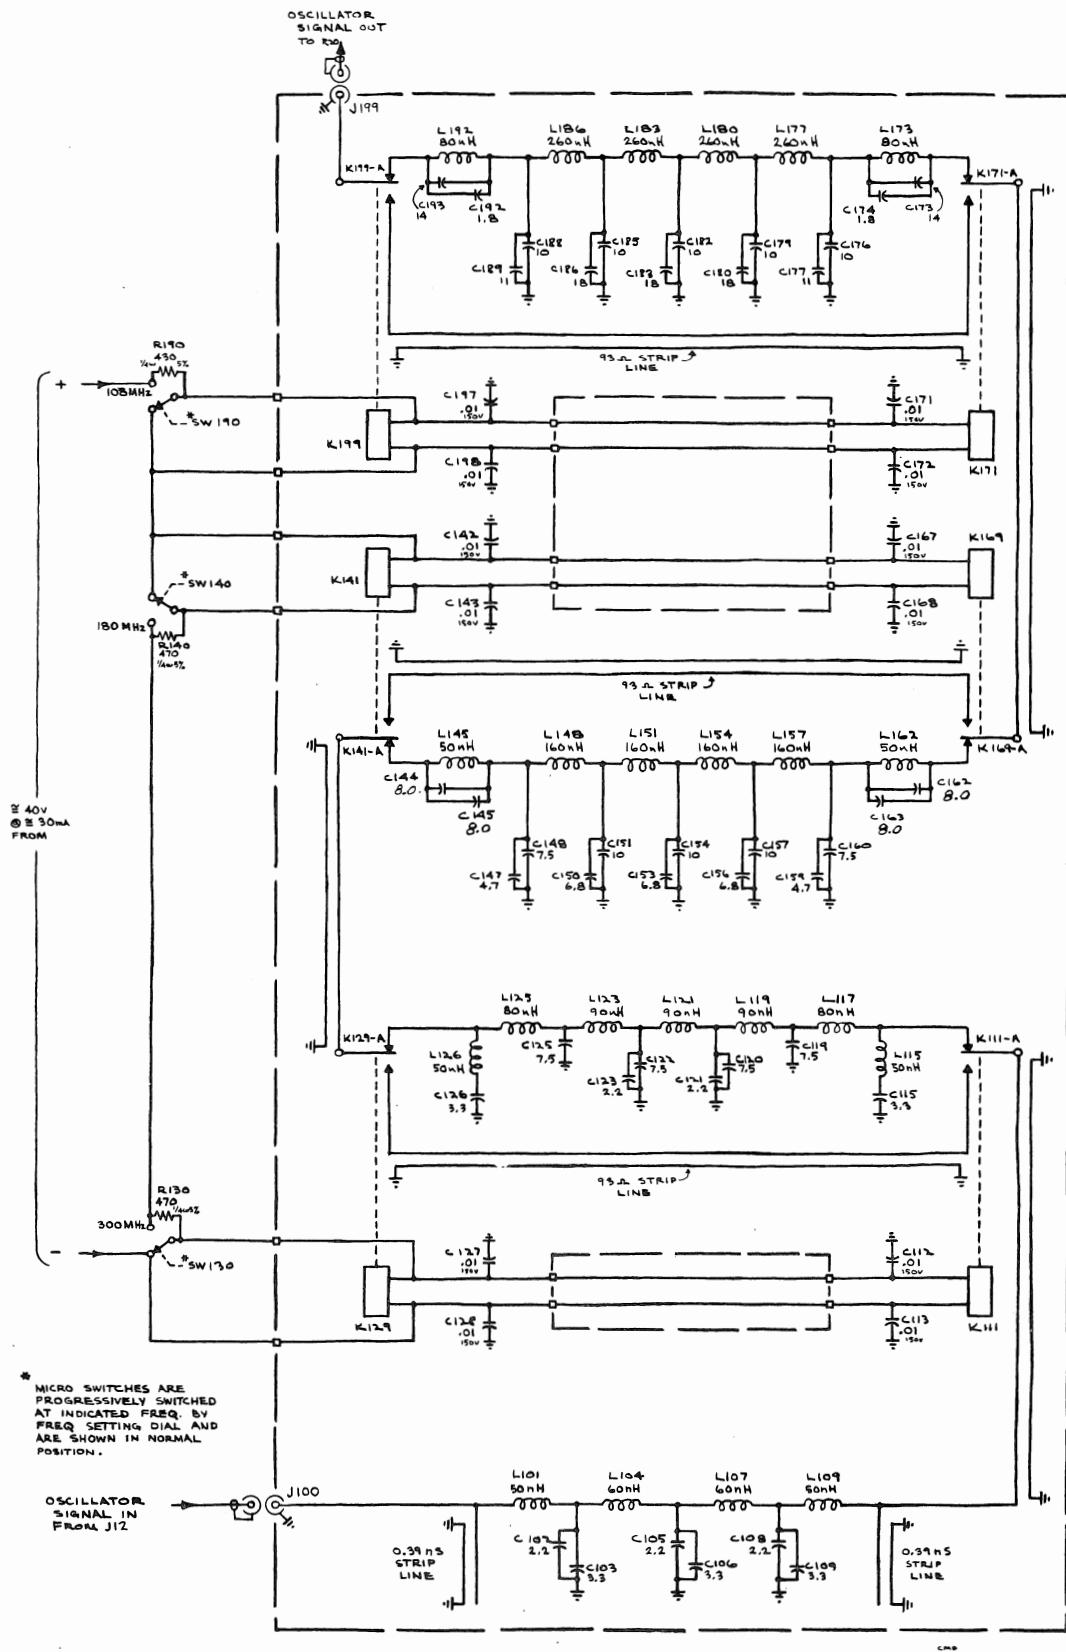

B

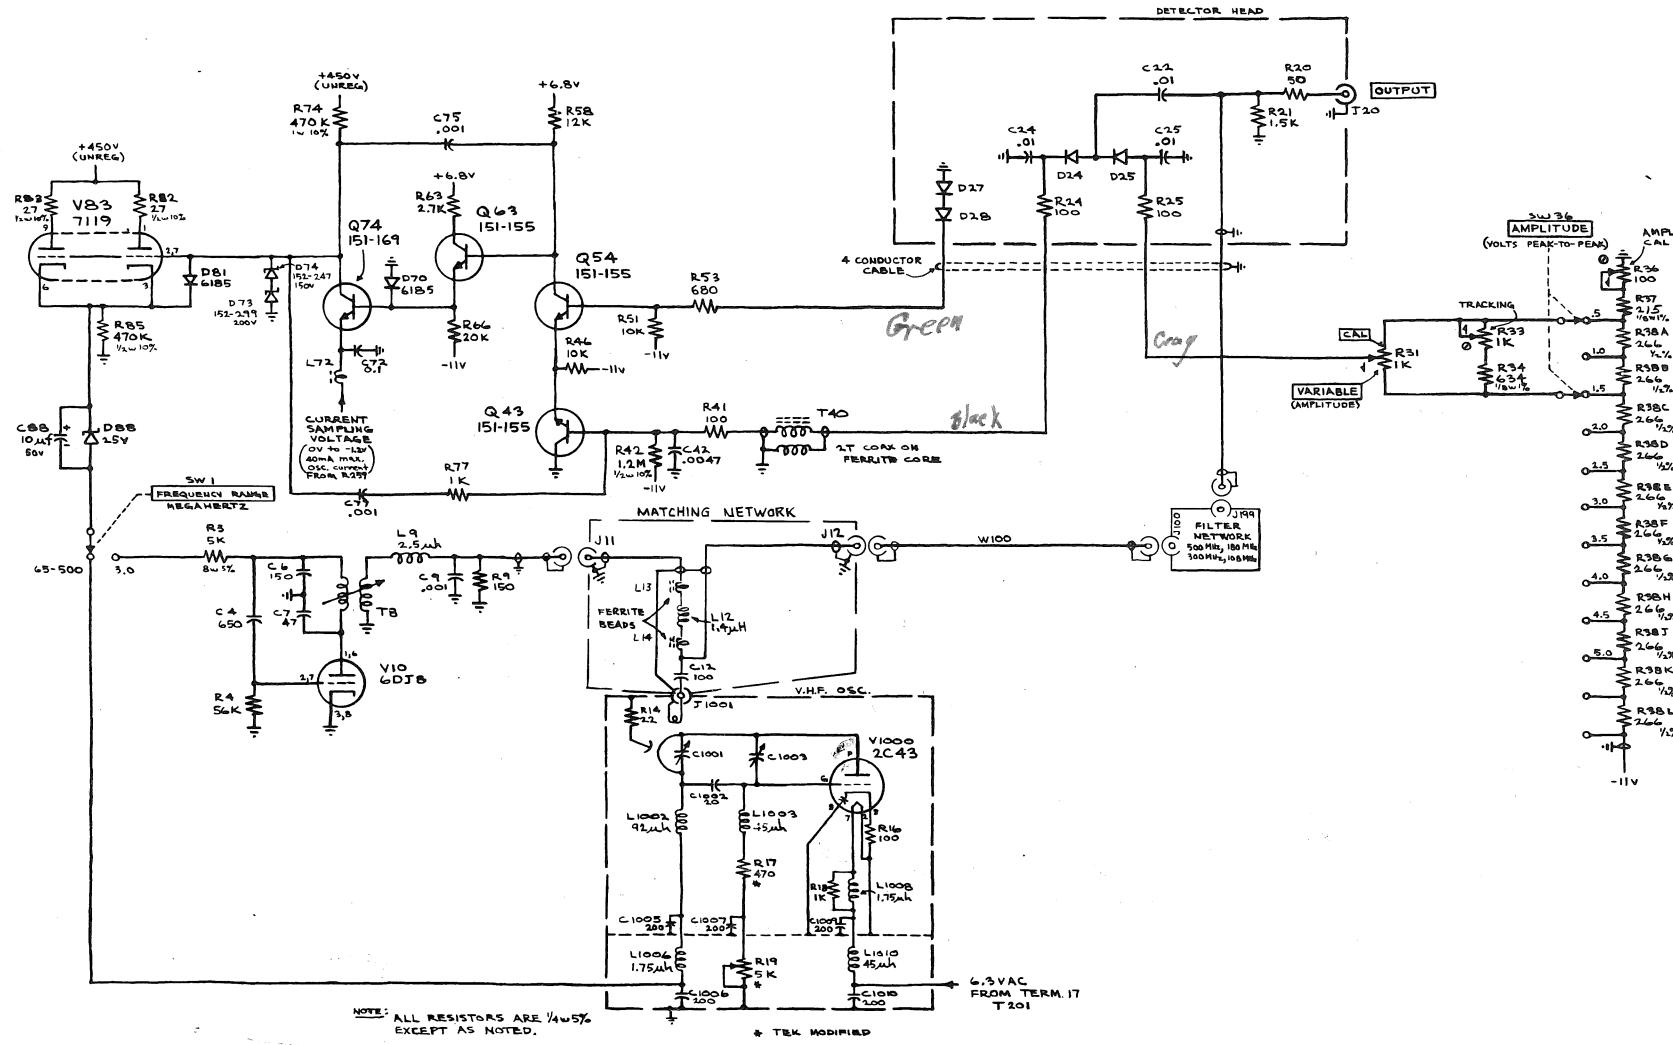

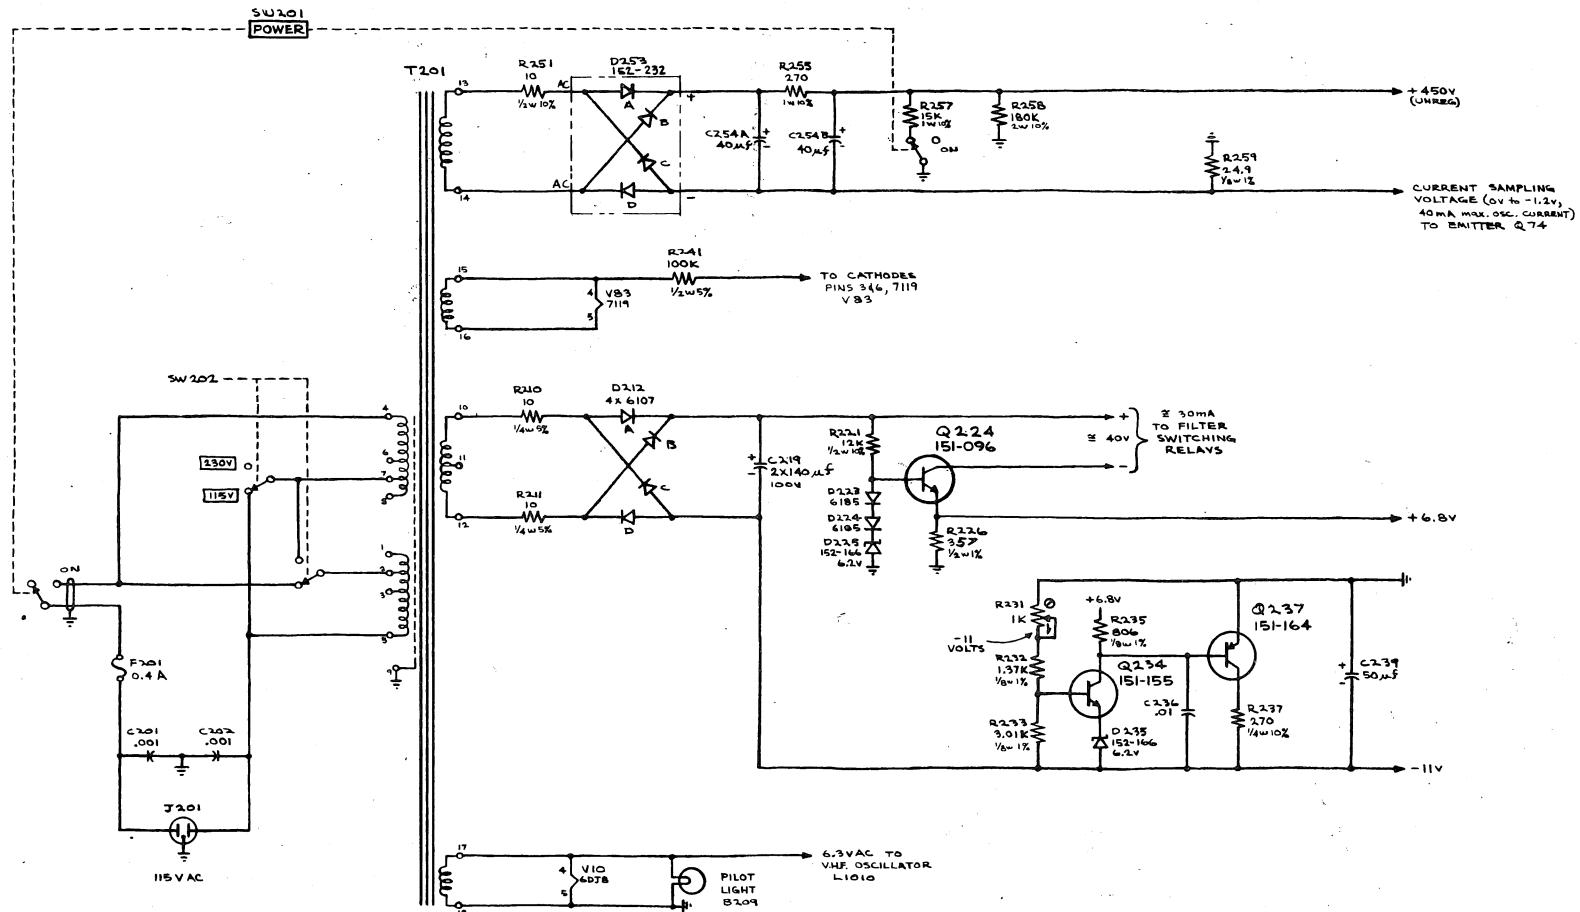

POWER SUPPLY

CMO
9-7-66