

CRT DATA

T 601
PERFORMANCE
CURVES


LIMITED DISTRIBUTION

10- 1-68


ALL MEASUREMENTS TAKEN WITH VOLTAGES SPECIFIED UNDER TYPICAL OPERATING CONDITIONS ON THE T 601 CRT DATA SHEET. THIS DATA IS REPRESENTATIVE OF THE CRT ALONE DISSOCIATED FROM ANY OPERATING CIRCUITRY.

AVERAGE GRID-DRIVE CHARACTERISTICS

GRID DRIVE MEASURED AS VOLTS ABOVE CUTOFF.


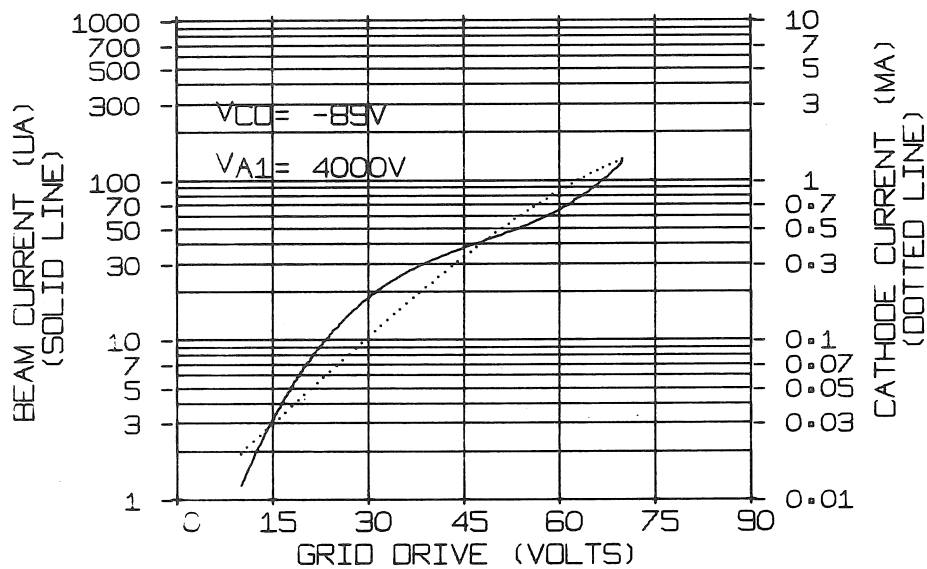


AVERAGE CENTER-SPOT-SIZE CHARACTERISTICS


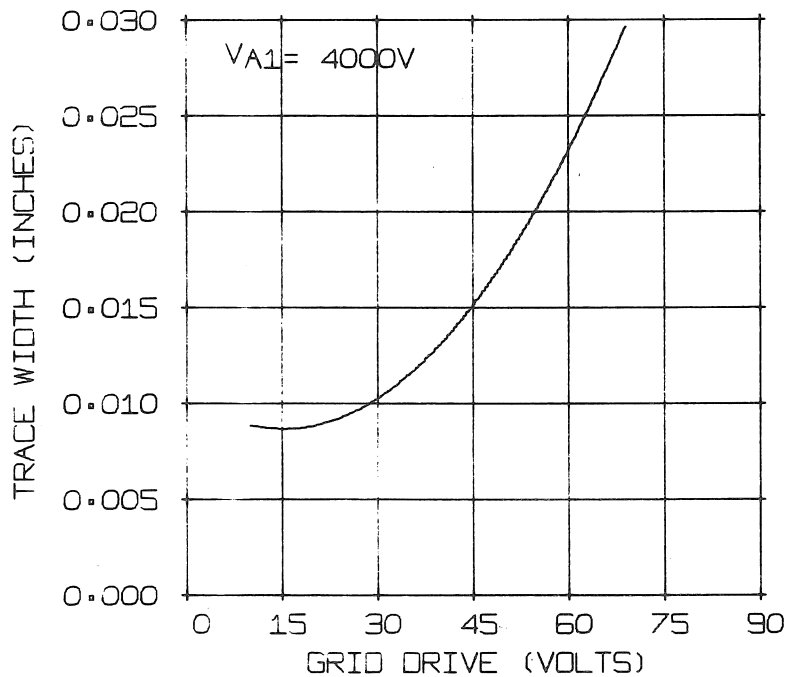


TRACE WIDTH VERSUS LOCATION ALONG AXIS

ALL TRACE WIDTH MEASUREMENTS TAKEN USING SHRINKING-RASTER METHOD WITH 11-LINE RASTER AT 2KHz REP-RATE.

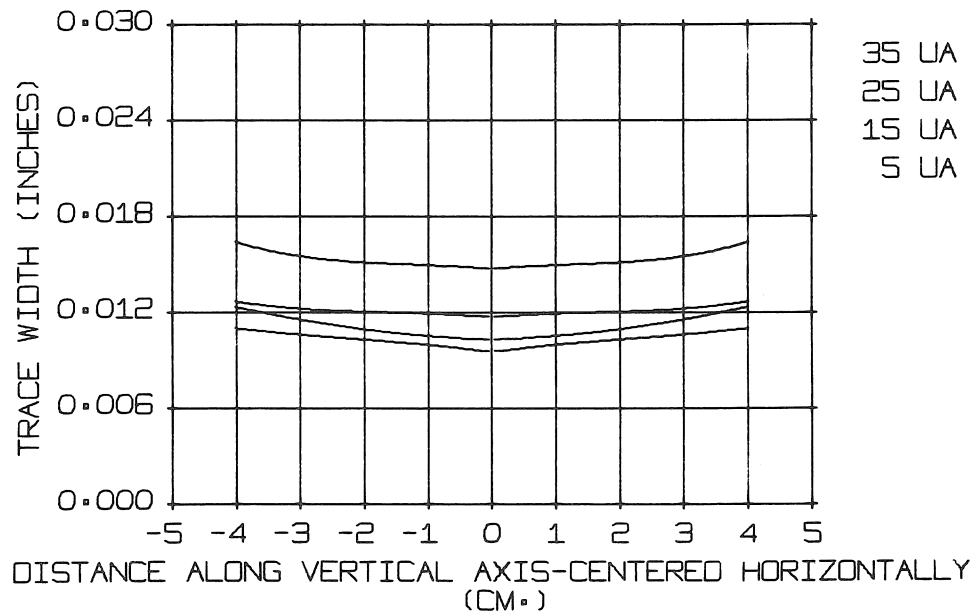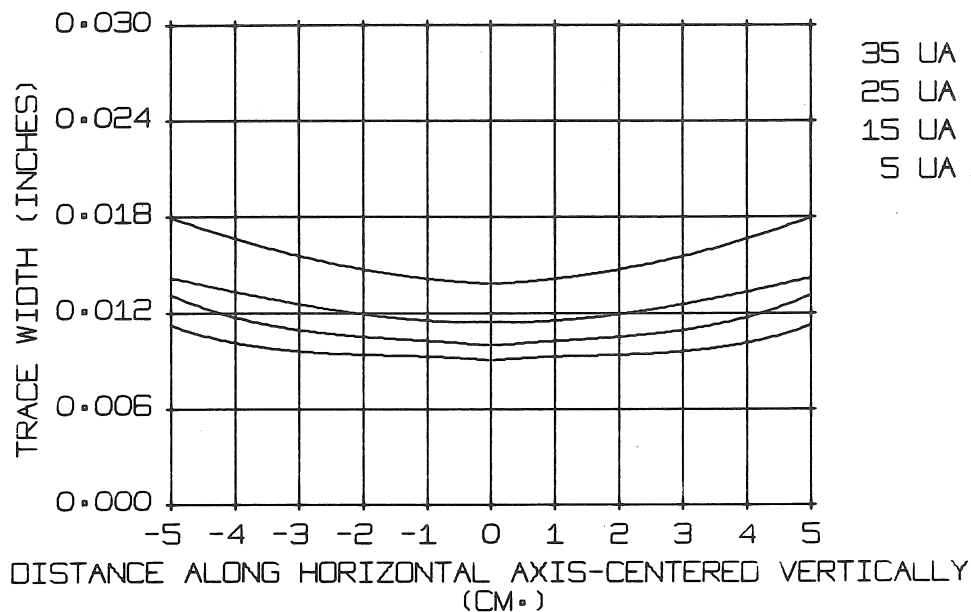

DEFLECTION PLATE I_B INTERCEPT
TAKEN AT NORMAL VIEWING CURRENTS OF 1-2 UA.

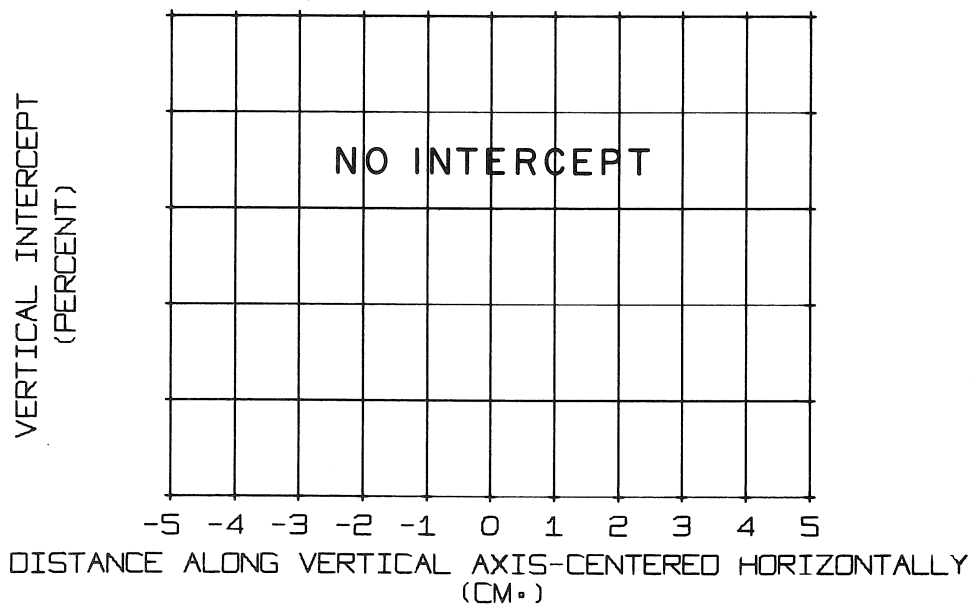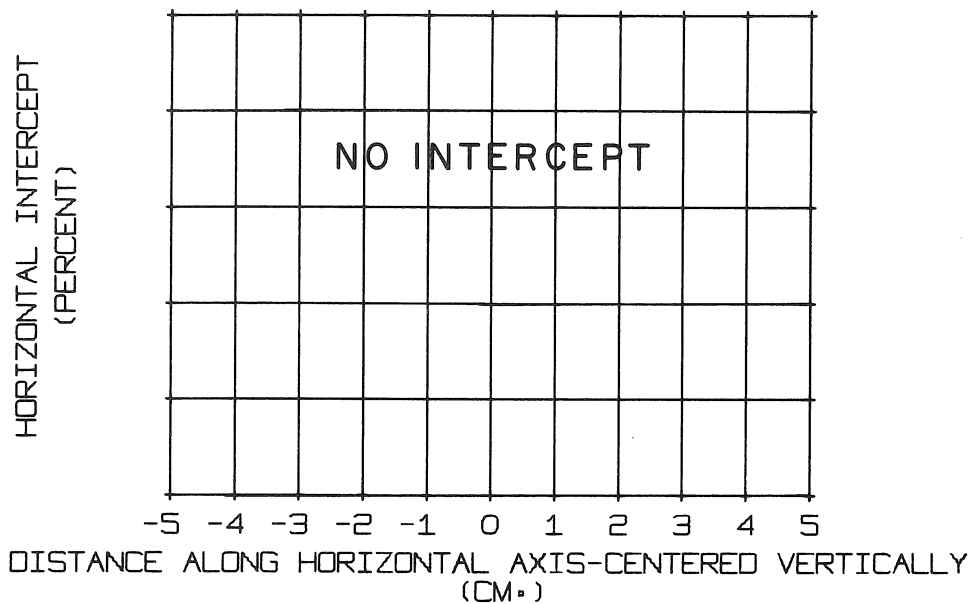

LINEARITY CHARACTERISTICS

PERCENT DEPARTURE FROM THE DEFLECTION FACTOR MEASURED AT THE AXIS

