


TWIST-LOCK® Devices


2 Pole, 3 Wire Grounding

15 Ampere, 125 Volts


Midget TWIST-LOCK® Devices



HBL7596N




HBL7596



HBL7598




HBL7594V

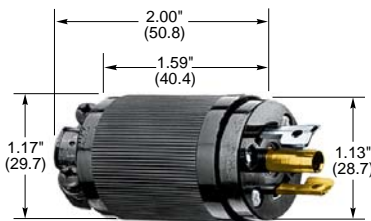

HBL7594



HBL7570



Flanged Receptacles

Description	Catalog Numbers
Exposed terminals, black nylon flange.	HBL7596N -
Exposed terminals, stainless steel flange.	HBL7596 -
Covered terminals, stainless steel flange, accepts cord .500" (12.7) in dia.	HBL7598 -

Male Plugs IP20 SUITABILITY

Description	Cord Dia.	Catalog Numbers
Valise® male plug, black nylon, insulation displacement terminals.	.300"-.430" (7.6-10.9)	- HBL7594V
Black nylon cover, phenolic body, multiple drive screw terminals.	.281"-.421" (7.1-10.7)	- HBL7594
Angle plug, black nylon cover, phenolic body, multiple drive screw terminals.	.335"-.421" (8.5-10.7)	- HBL7570

Weatherproof Accessory IP55** SUITABILITY


Description	Catalog Number
Seal-Tite® cover, black elastomer, for use with a HBL7594V plug when used with a HBL7593V connector body or a HBL7593V connector body when used with a flanged inlet.	HBL7495V** *

*Notes: These devices are not interchangeable with any other devices in this catalog. All male ground pins are sleeves and female device grounds are split pin. **IP55 Suitability when installed and used properly with plug and connector body combination. * Not UL Listed.*



HBL7495V

TWIST-LOCK® Devices
2 Pole, 3 Wire Grounding
 15 Ampere, 125 Volts
Midget TWIST-LOCK® Devices



Connector Bodies

IP20 SUITABILITY

Description	Cord Dia.	Catalog Numbers
Valise® connector body, black nylon, insulation displacement terminals.	.300"-.430" (7.6-10.9)	HBL7593V -
Black nylon cover, phenolic body, screw terminals.	.281"-.421" (7.1-10.7)	HBL7593 -
Angle connector body, black nylon cover, phenolic body, screw terminals.	.335"-.421" (8.5-10.7)	HBL7571 -



HBL7593V



HBL7593

Flanged Inlets

Description	Catalog Numbers
Exposed terminals, black nylon flange.	- HBL7595N
Exposed terminals, stainless steel flange.	- HBL7595
Covered terminals, stainless steel flange, accepts cord .500" (12.7) dia.	- HBL7551




HBL7571

Weatherproof Accessories

IP55** SUITABILITY

Description	Catalog Numbers
Seal-Tite® cover, black elastomer, for use with a HBL7593V connector body and a combination of HBL7594V plug and HBL7495V cover.	HBL7440V ** *
Closure cover for use with HBL7595 or HBL7595N.	HBL4889 *

*Notes: These devices are not interchangeable with any other devices in this catalog.
 All male ground pins are sleeves and female device grounds are split pin.
 **IP55 Suitability when installed and used properly with plug cover and connector body combination.
 * Not UL Listed.*




HBL7595N



HBL7440V



HBL4889



HBL7595