


Optical Reference Receivers (SONET/SDH)

ORR24

Features

- Data Rate: SONET/SDH 2.488 Gb/s
- ITU-T G.957 Compliance
- 4th Order Bessel-Thompson Frequency Response
- Bandwidth: DC to 2.0 GHz
- High Gain: 0.7 V/mW
- Wavelength: 1310 nm / 1550 nm
- Compatible with Tektronix 11800 or CSA 803 Series Sampling Scopes
- Assortment of Fiber Optic Mating Adapters (standard)
- Optional External Power Supply (016-1609-00)

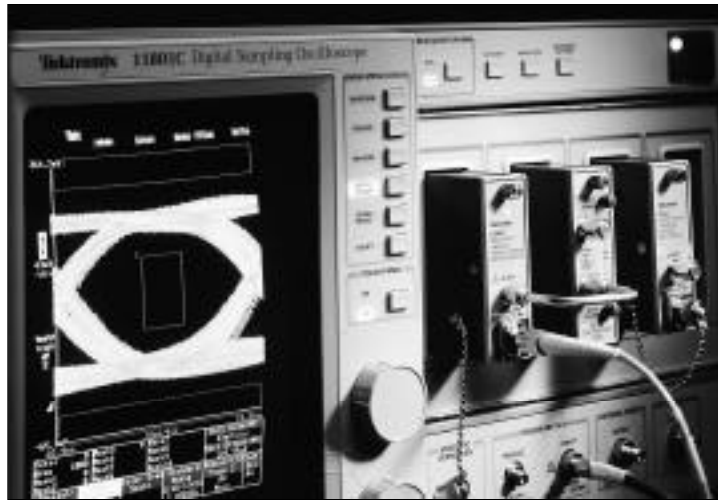

Applications

- Standards Compliance: SONET/SDH 2.488 Gb/s
- Accurate Extinction Ratio Measurements
- Eye-Pattern and Pulse Shape Measurements

Verification of SONET/SDH Signals

The Synchronous Data Hierarchy (SDH) and the Synchronous Optical Network (SONET) standards are the cornerstones of today's high-speed digital telecommunications systems. The Tektronix ORR24 optical reference receiver provides an important interface for compliance testing of SDH/SONET optical transmission products or components.

The amplified design of the ORR24 converts the incoming optical light into a high gain, low noise electrical signal. This allows easy testing of optical designs as well as repeatable measurements. The ORR24 is DC coupled which is required for accurate extinction ratio measurements.

The controlled frequency design of the ORR24 optical reference receiver ensures that the measurements correctly represent the true transmitted signal for the purpose of pulse shape analysis or eye-pattern measurements. A certificate of calibration and a frequency response graph are supplied with the ORR24 for performance documentation. The compact SD-xx form factor enables the ORR24 to conveniently plug into the Tektronix 11800 or CSA 803 Series sampling oscilloscopes for complete compliance testing. An optional power supply is available for other instrument applications.

Nominal Frequency Performance Values for an Optical Reference Receiver

SDH/SONET recommendations define the nominal transfer function for an optical reference receiver as being a fourth-order Bessel-Thompson response. The following table lists the corresponding attenuation at various frequencies, f . In this table f_o is the transmitted data rate and f_r is the 3 dB cutoff, which is defined as $f_r = 0.75f_o$.

Attenuation			Attenuation		
f/f_o	f/f_r	(dB)	f/f_o	f/f_r	(dB)
0.15	0.2	0.1	1.0	1.33	5.7
0.3	0.4	0.4	1.05	1.4	6.4
0.45	0.6	1.0	1.2	1.6	8.5
0.6	0.8	1.9	1.35	1.8	10.9
0.75	1.0	3.0	1.5	2.0	13.4
0.9	1.2	4.5	2.0	2.67	21.5

Note: Allowable deviation from the nominal attenuation in the table is very tightly specified in the SDH/SONET recommendations. The actual allowable deviation values depend on f/f_r and the bit rate. These values run as low as ± 0.5 dB.



ORR24 with standard accessories and optional power supply.

CE Certified for CE Marking.



See Tektronix on the World Wide Web:
<http://www.tek.com>



Tektronix Measurement products are manufactured in ISO registered facilities.

Optical Reference Receivers (SONET/SDH)

ORR24

CHARACTERISTICS

Wavelength Range – 1100 nm to 1650 nm.

Bandwidth¹ – DC to 2.0 GHz.

Rise Time – 205 ps.

Conversion Gain (typical) – 0.7 V/mW
(1310 nm/1550 nm).

Maximum Input Optical Power –
Maximum average linear response power: 100 μ W
(–10 dBm).

Maximum average non-destruct power: 5 mW
(7 dBm).

Maximum peak non-destruct power: 10 mW
(10 dBm).

¹ Optical bandwidth (–6 dB electrical power).

² Single-mode fiber input.

³ Reference receiver performance over 25° C \pm 10° C.

Noise Equivalent Power – \leq 15 pW per $\sqrt{\text{Hz}}$.

Aberrations – \leq 5% peak-peak.

Optical Return Loss² – \geq –30 dB.

Output Termination Impedance – 50 Ω \pm 4%.


Internal Fiber Size – 9 μ m.

ENVIRONMENTAL CHARACTERISTICS

Operating Temperature (Class VI)³ – +10° C to +40° C.

Non-operating Temperature (Class VI) – –40° C to +70° C.

Humidity – 75% non-condensing.

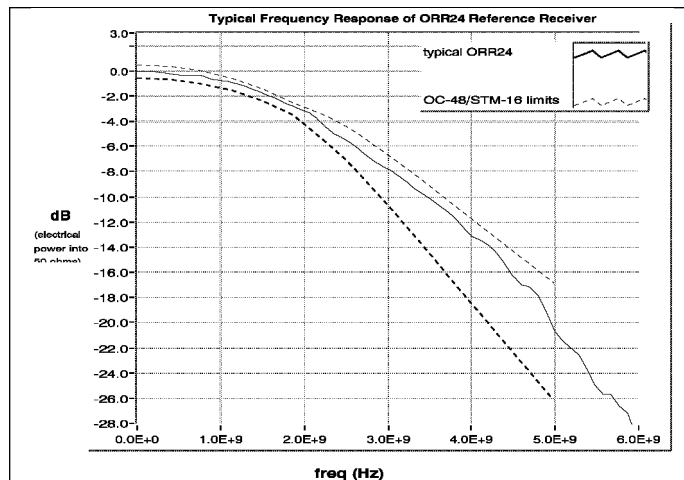

ORR24 frequency response (typical).

ORDERING INFORMATION

ORR24

2.488 Gb/s SDH/SONET Optical Reference Receiver.

Includes: Hard Case, User Manual (English), Assorted Fiber Optic Hybrid Connectors (FC/FC, FC/ST, FC/SC), FC/FC Single-mode Fiber Jumper, 50 Ω SMA Cable, Frequency Response Graph, Certificate of Traceable Calibration.

ORR24 PRODUCT SERVICE OPTIONS

Opt. 95 – Calibration Data.

Opt. R3 – Three Year Extended Warranty.

Opt. C3 – Three Year Calibration Service.

ORR24 AVAILABLE ACCESSORIES

External Power Supply – 016-1609-00. Includes: IEC compatible Power Supply, ORR24 Adapter Cable, U.S. Power Cord, Instruction Sheet.

Alternative Power Cords (IEC compatible):

European: 161-0066-09.

UK: 161-0066-10.

Australia: 161-0066-11.

Switzerland: 161-0154-00.

2 m Single-mode Fiber Optic Cables, 8/125 μ m –

FC/PC to FC/PC: 174-1387-00.

FC/PC to ST: 174-1386-00.

FC/PC to Biconic: 174-1388-00.

FC/PC to Diamond (2.5): 174-1497-00.

FC/PC to Diamond (3.5): 174-1385-00.

2 m Multimode Fiber Optic Cables, 62.5/125 μ m –

FC/PC to FC/PC: 174-2322-00.

FC/PC to SMA: 174-2324-00.

FC/PC to Biconic: 174-2323-00.

90/10, 3-Port Single-Mode Optical Splitter, FC/PC Connectors – 174-3737-00.

10 dB, In-Line Single-Mode Optical Attenuator, FC/PC Connectors – 119-5118-00.

50 Ω Power Dividers, DC to 12 GHz (50% splitter) – SMA Female: 015-0565-00.

SMA Male: 015-1014-00.

For further information, contact Tektronix:

World Wide Web: <http://www.tek.com>; ASEAN Countries (65) 356-3900; Australia & New Zealand 61 (2) 888-7066; Austria, Eastern Europe, & Middle East 43 (1) 701 77-261; Belgium 32 (2) 725-96-10; Brazil and South America 55 (11) 3741 8360; Canada 1 (800) 661-5625; Denmark 45 (44) 850700; Finland 358 (9) 4783 400; France & North Africa 33 (1) 69 86 81 08; Germany 49 (221) 94 77-400; Hong Kong (852) 2585-6688; India 91 (80) 2275577; Italy 39 (2) 250861; Japan (Sony/Tektronix Corporation) 81 (3) 3448-4611; Mexico, Central America, & Caribbean 52 (5) 666-6333; The Netherlands 31 23 56 95555; Norway 47 (22) 070700; People's Republic of China (86) 10-62351230; Republic of Korea 82 (2) 528-5299; Spain & Portugal 34 (1) 372 6000; Sweden 46 (8) 629 6500; Switzerland 41 (41) 7119192; Taiwan 886 (2) 722-9622; United Kingdom & Eire 44 (1628) 403300; USA 1 (800) 426-2200

From other areas, contact: Tektronix, Inc. Export Sales, P.O. Box 500, M/S 50-255, Beaverton, Oregon 97077-0001, USA (503) 627-1916

Copyright © 1997, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

