

## SPECIFICATIONS

### Description

The P6130 is a subminiature, 10X passive probe designed for use with all general-purpose oscilloscopes. It is fully compatible with the Tektronix family of subminiature probe accessories. The P6130 is available with a 1.5, 2, or 3-meter cable.

### Electrical Characteristics

Attenuation: 10X  $\pm$ 3% at dc. (Oscilloscope input must be 1 M $\Omega$   $\pm$ 2%.)

Input Resistance (System): 10 M $\Omega$   $\pm$ 2%. (See Figure 1.)

Input Capacitance: (See Figure 1.)

1.5-Meter Probe	Approximately 12.7 pF.
2-Meter Probe	Approximately 13.2 pF.
3-Meter Probe	Approximately 14.5 pF.

Compensation Range: 15 pF to 35 pF. (3-m version: 15 pF to 30 pF.)

System Bandwidth ( $-3$  dB): DC to at least 250 MHz (3-m version: 150 MHz) on a TEKTRONIX 475A or equivalent oscilloscope.

Maximum Nondestructive Input Voltage: 500 V (dc + peak ac) to 1.3 MHz. (See Figure 2 for voltage derating curve.)

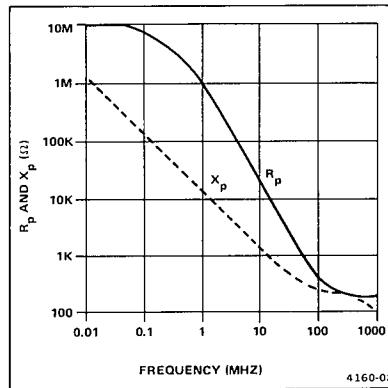


Figure 1. Typical  $X_p$  and  $R_p$  versus frequency.

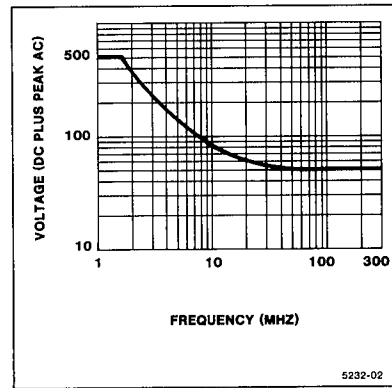


Figure 2. Typical voltage derating versus frequency.

### Environmental Characteristics

Temperature Range (Operating):  $-15^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$  ( $+5^{\circ}\text{F}$  to  $+167^{\circ}\text{F}$ ).

Temperature Range (Nonoperating):  $-62^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  ( $-80^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$ ).

Humidity: Five cycles (120 hr) at 95% to 97% relative humidity. Per Tek Standard 062-2847-00, Class 3. Ref to MIL-E-16400F, paragraph 4.5.9 through 4.5.9.5.1, class 4.

### Physical Characteristics

Net Weight (includes accessories):

1.5-Meter Probe	111 g (3.9 oz).
2-Meter Probe	136 g (4.8 oz).
3-Meter Probe	159 g (5.6 oz).

Probe Cable Length: 1.5 m (4.9 ft), 2.0 m (6.6 ft), or 3.0 m (9.8 ft).

### Safety

To avoid explosion, do not operate this product in an explosive atmosphere unless it has been specifically certified for such operation.

This product meets the requirements of UL 1244.

First Printing FEB 1985

Revised NOV 1986

Copyright © 1985, Tektronix, Inc. All rights reserved.

INSTRUCTION  
SHEET  
NO. 070-5513-00  
PRODUCT GROUP 60

**TEK** PROBE  
AND ACCESSORIES

**P6130**  
**10X PASSIVE PROBE**  
GENERAL PURPOSE, SUBMINIATURE

**Tektronix**  
COMMITTED TO EXCELLENCE