


M. NO.

VOLTAGE & CURRENT RATING ARE NOMINAL & VARY WITH LOAD & LINE VOLTAGE. ALL WINDINGS INSULATED FOR 600 VDC UNLESS OTHERWISE NOTED

4.500
±.005
3.750
±.005

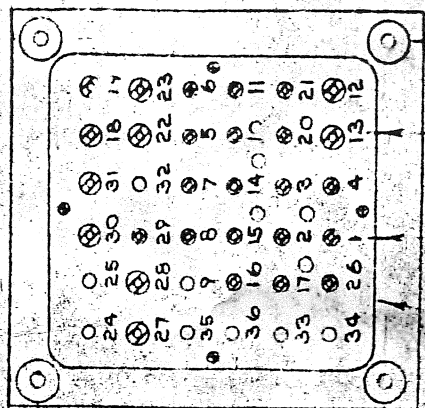


- 27-28 #20
- 18-22
- C. 16-17-26 3-26T#23
- 30-31

WINDING INS. FOR 4000 VDC



4.000
±.008
4.750
±.008

- 7-8
- 14-15


5.000
±.100
2.400
±.030

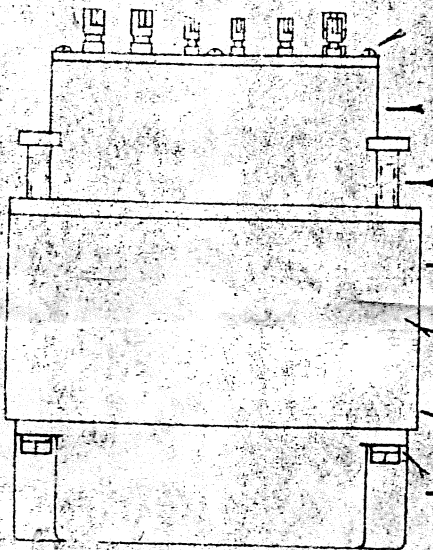

- 5-10
- 6-11
- 29
- 2-4
- 1-3

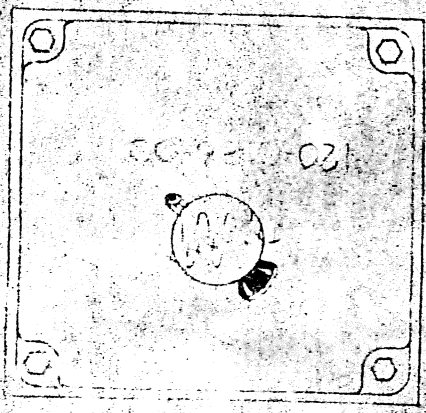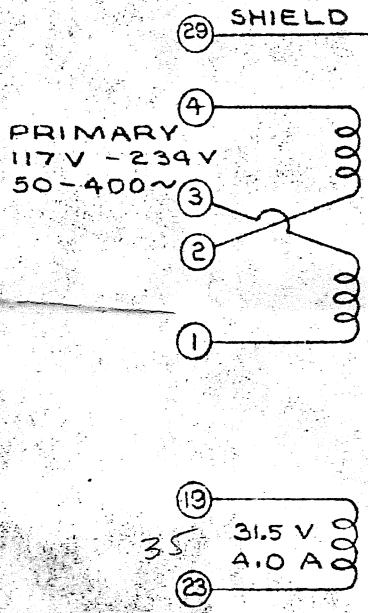

CUSTOMER SERVICE

 TEKTRONIX, INC. PORTLAND, OREGON, U.S.A.			
TITLE: TRANSFORMER, POWER			
MATERIAL: AS LISTED			
FINISH: AS NOTED			
ENGR: GS	BLANK SIZE	TYPE 519 P	
CH. BY: RT	DR. BY: φ	SCALE: NONE	DATE 11/16/61
TOLERANCE: FRACTIONAL 21/64 ANGLES 52° UNLESS OTHERWISE SPECIFIED		PART NO. 120-0186-00	
		DWG. NO. B-	

- 31.5V 4.0A
- 8V 0.6A
- 8V 0.6A
- 6.5V 12.0A
- 6.5V 4.0A
- 6.5V 4.0A
- 6.5V 3.0A
- 230V 0.25A
- 201V .015A
- 242V 0.4A
- 266V 0.16A