
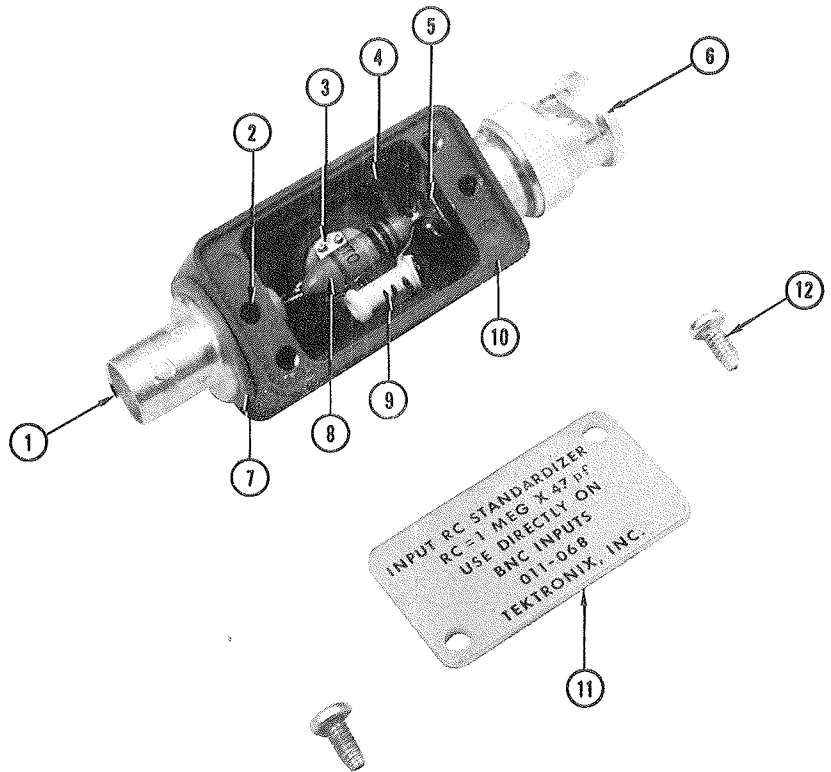


INPUT RC STANDARDIZER RC 1 MEG X 47 pF (Part No. 011-0068-00)

The 47-pF Input RC Standardizer is a calibration aid that is useful when adjusting the input time constant of oscilloscope (plug-in unit) input circuits. After setting the input time constant, attenuator probes adjusted for 47-pF input circuits, can be used with other 47-pF input circuits without recompensation.

To use the Standardizer: Attach it directly to the oscilloscope input connector, drive it with a square-wave signal from a low impedance source such as an oscilloscope 1 kc Amplitude Calibrator or a Tektronix Type 105 Square-Wave Generator. Display about 2 or 3 vertical divisions of a signal at a sweep rate to produce 4 or 5 cycles. Adjust the oscilloscope input capacitance (according to the particular instrument instruction manual) for a square cornered square-wave display.

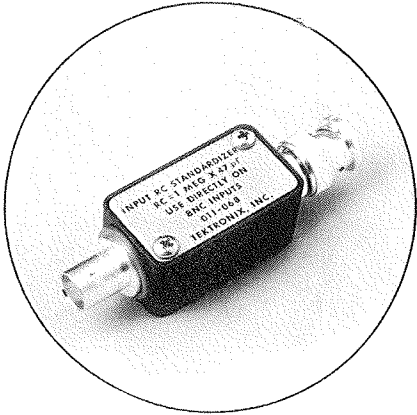

REF. NO.	PART NO.	SERIAL/MODEL NO.		QTY.	DESCRIPTION
		EFF.	DISC.		
1	131-0126-00			1	CONNECTOR, coaxial, BNC, single contact
2	213-0075-00			2	SCREW, set, 4-40 x 3/32 inch
3	281-0060-00			1	CAPACITOR, 2-8 pF, Cer, Var.
4	352-0045-00			1	HOLDER, insulating cap
5	132-0081-00			1	NUT
6	134-0044-00			1	PLUG, probe
	166-0217-00			1	TUBE, spacer, insulator
	358-0072-00			1	BUSHING, insulator
7	210-0962-00			1	WASHER, bevel
8	323-0481-00			1	RESISTOR, 1 meg, 1/2 W, Prec, ±1%
9	281-0600-00			1	CAPACITOR, 35 pF, Cer, ± 10%
10	202-0095-00			1	BOX, standardizer
	214-0271-00			1	BUTTON, standardizer (not shown)
11	200-0539-00			1	COVER, standardizer
12	213-0088-00			2	SCREW, thread forming, #4 x 1/4 inch, PHS

DATA SHEET NO.
061-0943-00
MAY 1966
(Revised)

©. 1963, Tektronix, Inc.
All rights reserved.